


## 1 WAY DUOX MULTICHANNEL REGENERATOR

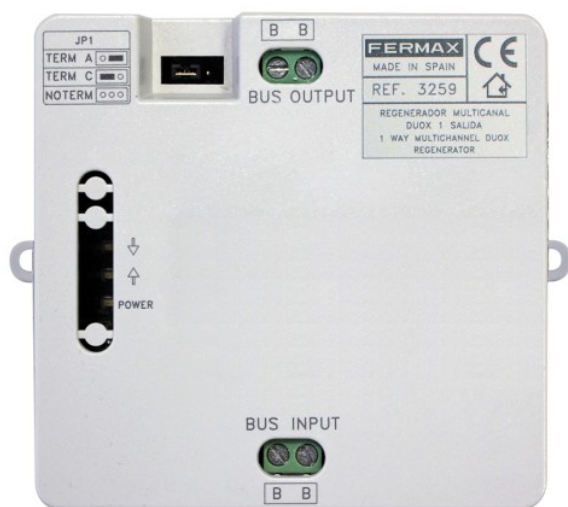

### Reference: 3259

Device that enables regenerating the Duox signal in both directions, isolating different sections of the installation and expanding terminal distances and capacities. Inputs and outputs get isolated...

## DESCRIPTION

Device that enables regenerating the Duox signal in both directions, isolating different sections of the installation and expanding terminal distances and capacities. Inputs and outputs get isolated as protection against short circuits, load and signal reflections.

It generates an additional calling channel between the panel and the apartment when used to isolate a block or an individual apartment. Thus, it is possible to hold a conversation on each BI or apartment without it simultaneously.

It includes 1 Input and 1 Output. The section on both sides require their own power supply set ('filter+source'): the regenerator with 1 output amplifies the data, but it does not allow the power supply through.

Use: use only when 1 additional communication channel for the BI or apartment is required.

Small size allows installation in electrical cabinets. Can be screwed/bolted directly onto the wall.

### DUOX System:

this is the first completely digital system in two-wire non-polarized technology. This is the most technologically advanced system in the world, allowing fast installation with just two wires. The most highly simplified and advanced installation system on the market. It maximizes intercom system capacities thanks to digital audio and video transmission.

Duox offers maximum ease of installation, enabling transmission of all signals: power feed, audio, video and data with the highest capacities.

It permits management of

- From 1 to 999,999 apartments:
- Calls from pushbutton panel: 99.
- Calls from keypad panel:
- Sub-block: 99.
- Block: 9999.
- General entry: 999999.

- From 1 to 10 panels:
- Number of panels:
- General entry: 10.
- Block: 10.
- Sub-block: 10.

The maximum distance will depend on the installation topology and cable. See table of sections and distances for more



details.

DUOX offers maximum versatility thanks to the stability and strength of signal transmission in this fully digital system which avoids possible feedback and interference in the installation.

The DUOX amplifier includes a voice synthesizer. Operating the lock release issues a message: "door open, close after entry".

Up to three terminals (telephones/monitors) can be installed in each apartment.

Apartment terminals require simple programming. This programming assigns a call code to each terminal.

Communication is private.

Cables:

Any type of cable may be selected: parallel, twisted pair and UTP CAT5 in new installations; even existing cables in replacement work can be used (5 wires, 2-wire bell or old 4+N wire).

Non-polarized 2-wire.

Please check the sections-distances-terminals-power supply table.

## TECHNICAL SPECIFICATIONS

Power supply: 18VDC

Consumption:

- Standby: 180mA

- Active: 213 mA

Operating temperature: -5°C to 40°C

Maximum 5 cascading units.

Maximum number of terminals: 100 with parallel wiring, 80 with other types of wiring.

Dimensions: 86 x 89 x 26 mm (height-width-depth).

Power: 18 VDC

**Weight:** 0,1471086 kg

**Size of product when packed:** 6,4x10,8x9,6 cm

**EAN 13:** 8424299032597