


## 7" WAY-FI KIT MONITOR

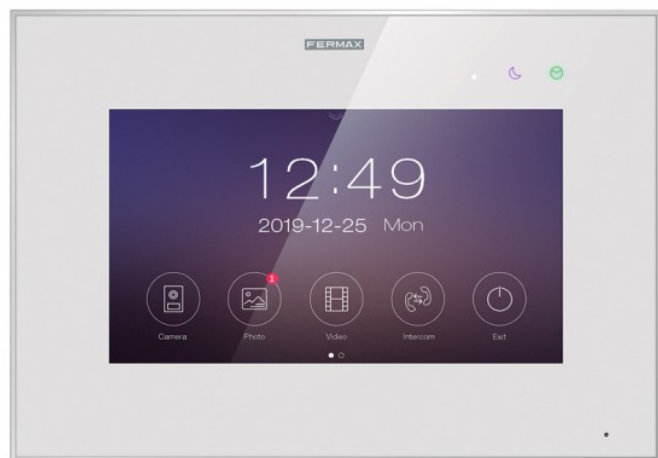

**Reference:** 1436

### TECHNICAL SPECIFICATIONS

- Dimensions (Width x Height x Depth): 222 x 154 x 10 mm
- Call divert to smartphone: Yes (unlimited number of smartphones can be linked). Possibility to choose in the monitor if the call rings simultaneously in monitor and smartphone or first in the monitor and then in the smartphone (programmable delay time 5- 25 s.). Call divert can be also disabled.
- Monitor fitting: Surface (wall bracket included)
- Screen features: 7" capacitive touchscreen (panoramic format 16:9). Resolution 1024 x 600 pixels. Great vision angle (LCD IPS technology). User friendly interface compatible with sliding operations.
- LEDs: White: monitor ON; Purple: Do-not-disturb ON; Green: Pictures/Videos pending to be seen.
- Conversation mode: Handsfree
- Door bell connections: Yes (connections GND, BELL)
- Date and Time: Yes (Time: 24h format; Date: configurable format). Manually programmable from the monitor or synchronize from the APP.
- Do not disturb mode: Yes. Immediate Activation/Deactivation and/or programmable daily time slot.
- Picture capture: Yes. Automatic (possible to switch it off, disabled by default) and manual. 100 pictures without Micro SD card, 1.000 with Micro SD (not included in the kit). The pictures in the monitor can be copied to the Micro SD card.
- Video capture: Yes. Automatic (possible to switch it off) and manual. Only with Micro SD 8-32 GB, not included in the kit. Until 128 videos of 15 s.
- Erasing pictures and videos: Yes. One by one, select some, select all. When reaching the maximum storage, the oldest pictures/videos are deleted. Available option to format the Micro SD card. Deletion after 30 days activated by default.
- Calls log (with date and time) Yes. Pictures and videos are stored with date and time.
- Auto-on (to see outside from the monitor): Yes (2 outdoor panels and 2 cameras). Selectable.
- Main door release (electric lock): It activates 12 Vcc output (connections S+, S- in the panel). Programmable activation time (1-8 s.)
- Auxiliary or secondary (electromagnetic lock, relay, etc.): It activates relay (connections COM, NO/NC). Programmable activation time (1-8 s.)
- Video settings: Yes (Brightness, contrast and colour)
- Volume settings: (call and conversation) Yes (levels from 0-8)
- Intercommunication between monitors: Yes. Possible call to one or call to all. Maximum up to 3 monitors per house (1 Master and 2 Slaves). Only between monitors (not with the smartphones).
- Language menu: 16 (Spanish, English, French, German, Portuguese, Finnish, Czech, Polish, Dutch, Norwegian, Greek, Danish, Swedish, Turkish, Russian, Arabic)
- Ringtones: 16. Different selection for: outdoor panel call, apartment door bell, intercommunication call.
- CCTV compatibility: Yes. One peripheral analogue camera to each outdoor panel.
- Automatic door release upon call (Doormatic): No
- Connections: Bus (B, B); Door bell (GND, BELL); Micro SD slot (8-32 GB); Micro USB slot for Micro USB to RJ45 (Ethernet) cable (included); Video impedance adaptor (dipswitch 1 ON at the end of the line)



**Weight:** 0,6037 kg

**Size of product when packed:** 19,8x28,4x3,5 cm

**EAN 13:** 8424299014364