




SB-101 *Emergency Help Push Button Z-wave Plus*

- Works with Smart Home IoT kit
- Build-in battery
- Charger voltage 5.0V
- Armed and disarmed button
- LED state indicators
- Send notification

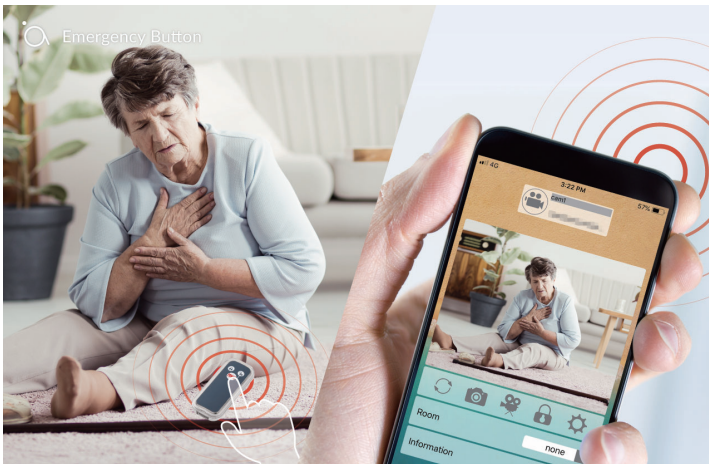


Emergency Button

The SB-101 is a wireless emergency button. It allow elders or patients to inform people when they need help. You can receive the message on your smartphone even when away from the home.

Z-Wave Plus Technology

The Z-Wave plus is the best choice for smart home with its interference free frequency and MESH architecture. These technology insure reliable, energy saving, and uninterrupted connection for your smart home devices. The SA-103 is also a Z-Wave Plus repeater which repeat the signal to make signal coverage wider.

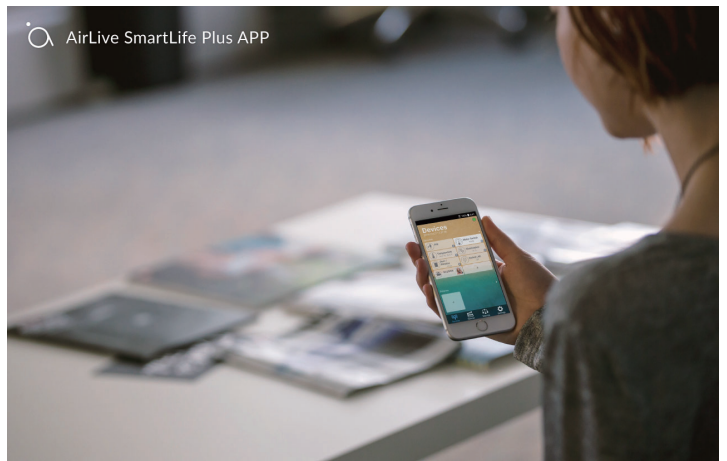



AirLive SmartLife Plus APP

The SmartLife Plus APP puts everything together in your smart home. You can view the reading or video of your device. The Scene manager let you design lighting and action for each room and occasions. The Macro allow you to set "If this then that" action. It allows you to tailor made your smart home to your need.

Specifications

Model	SB-101 Emergency Help Push Button Z-wave Plus
Z-Wave Standard	Z-wave plus
Z-Wave Frequency	CE : 868.40 MHz, 869.85 MHz
	FCC : 908.40 MHz, 916.00 MHz
Maximum transmission distance	30 M (Indoor)
Supply Voltage	3.7 V (Lithium Polymer Battery)
Charger Voltage	5.0 V (Micro USB Input)
Standby Current	8 uA
Operating Current	40 mA
Button	Left Key: Arm
	Right Key: Disarm
	Central Key: Panic button
LED Indicator	1 Red LED

Dimension

Dimensions	80(L) x 35(W) x 12(H) mm
Operating Temperature	-10 ~ 40° C
Storage Temperature	95% RH max

Ordering Information

Model	SB-101 Emergency Help Push Button Z-wave Plus
-------	---

Standard Package

Package Size	13.1 * 6.2 * 3 cm
Product Weight	0.044 kg
Package Weight	0.064 kg
Package Content	SB-101 * 1