

# SD-101 In-wall Dimmer Switch Z-wave Plus

- Works with Smart Home IoT kit
- Supply Voltage: 100 ~ 240 VAC/ 50-60 Hz
- Dimmer Controls

- Up to 15 Dimmable LED bulbs
  - 230Vac: 200W
  - 120Vac: 100W
- Longer Z-wave signal transmission
- AES 128 bit Z-wave encryption



### Lighting control

The SD-101 is a in-wall light dimmer that can control up to 15 LED bulbs. It allows you to turn on or off the light at the touch of the APP. Even better, you can adjust to different level of brightness with our SR-101 Smart button.

#### **Voice Cont**

The SD-101 works with Amazon Alexa or Google Home. Simply ask Alexa or Google home to turn on or turn off the light, then your room's lighting is always under your command.






### **Z-Wave Plus Technology**

The Z-Wave plus is the best choice for smart home with its interference free frequency and MESH architecture. These technology insure reliable, energy saving, and uninterrupted connection for your smart home devices. The SA-103 is also a Z-Wave Plus repeater which repeat the signal to make signal coverage wider.

#### AirLive SmartLife Plus APP

The SmartLife Plus APP puts everything together in your smart home. You can view the reading or video of your device. The Scene manager let you design lighting and action for each room and occasions. The Macro allow you to set "If this then that" action. It allows you to tailor made your smart home to your need.

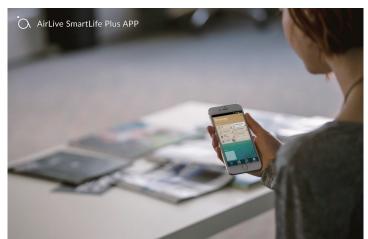

### **Specifications**

Model	SD-101 In-wall Dimmer Switch Z-wave Plus
Z-Wave Standard	Z-wave plus
Z-Wave Frequency	CE: 868.40 MHz, 869.85 MHz
	FCC: 908.40 MHz, 916.00 MHz
Maximum transmission distance	40 M (Indoor)
Power input Range	0.01 ~ 1 A
Supply Voltage	100 ~ 240 Vac
Maximum Output Current	0.9 A (Resistive Load)
Output Rating	15 Dimmable LED bulbs
	230 Vac: 200 W
	120 Vac: 100 W
Function	Dimmer Controls
LED Indicator	1 Red LED

#### **Dimension and Environment**

Dimensions	47.5(L) x 39(W) x 16.2(H) mm
Operating Temperature	0 ~ 40° C
Storage Temperature	85% RH max

### **Ordering Information**

Model	SD-101 In-wall Dimmer Switch Z-wave Plus
-------	--

## Standard Package

Package Size	13.1 * 6.2 * 3 cm
Product Weight	0.026 kg
Package Weight	0.046 kg
Package Content	SD-101 * 1

