


Entrance Camera

Model No. : DRC-4BP/4CP

COMMAX®

Use And Care Guide

Home Network
COMMAX®

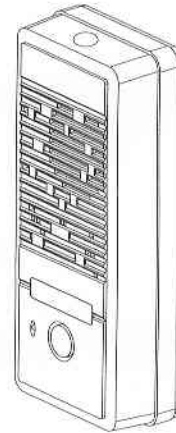

COMMAX Co.,Ltd.

513-11, Sangdaewon-dong, Jungwon-gu,
Seongnam-si, Gyeonggi-do, Korea
Int'l Business Dept :
Tel. : +82-31-7393-540-550
Fax. : +82-31-745-2133
Web site : www.commax.co.kr



Printed In Korea

COMMAX Co.,Ltd.


Table of Contents

Introduction.....	3
Important Safety Instructions.....	4
Table of Contents.....	5
The Name and function of each part	6
Wiring & Installation.....	7
Contents.....	9
Specifications.....	11

Thank you very much for purchasing the Commax product.
Please read this user's manual carefully before using it. And, please use it accurately.
Our company will not be held responsible for any crime prevention and disaster prevention accidents that take place in situations when this product is not in a situation in which it operates normally.

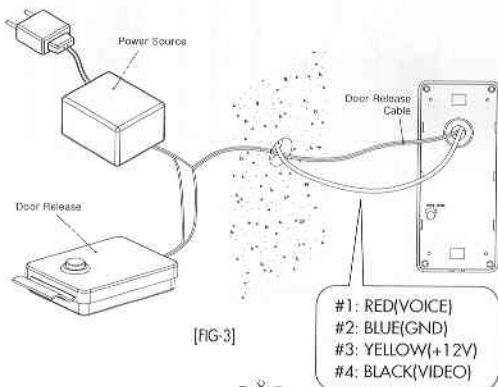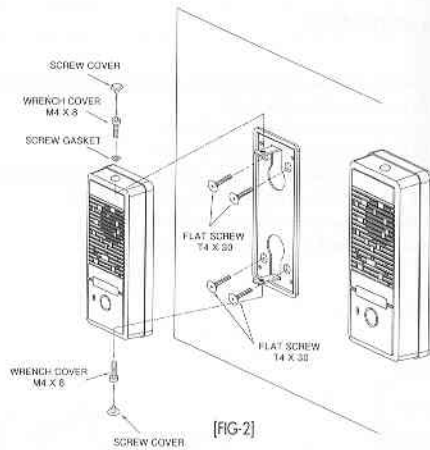

The name and function of each part

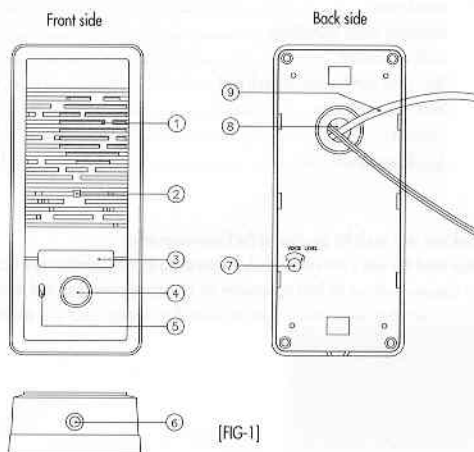

[FIG-1]

①	Speaker: Transmit sounds from the household.
②	Camera Lens: Protect it from foreign substances.
③	LED Lamp: Turns on at night for better viewing.
④	Page Button: Used to page the household.
⑤	MIC: For use when communicating with the household.
⑥	Mounting Holes
⑦	Volume Adjustment: Used to adjust speaker volume.
⑧	Door Release Cable
⑨	Wiring: Take heed to the polarity and connect to the household monitor. Connect to the door release by referring to the wiring diagram.

- 6 -

Wiring & Installation

1. Align holes on the wall, where the unit is to be installed, with mounting brackets and secure.

FIG-1: Install the camera at a 30° angle to the left.


(install the bracket in reverse to angle 30° to the right)

FIG-2: Install the camera at a perpendicular angle to the front.

2. Wire the household monitor cables as shown below. Take heed to the polarity of the wiring. [FIG-3]
(#1: RED/VOICE, #2: BLUE/GND, #3: YELLOW/DC12V, #4: BLACK/VIDEO)

3. Wire the door release cable as shown in the diagram. [FIG-3]

4. Tighten using bolts and a wrench, then cover using the AL.screw covers.

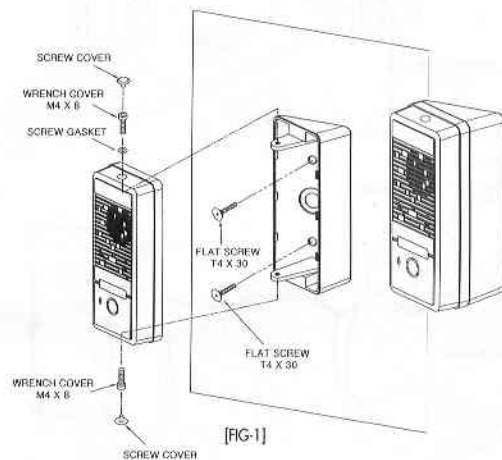

[FIG-1]

- 7 -

Specification

specification	Model	DRC-4BP/4CP
Resolution		270,000 pixel CCD
Rated voltage		DC 12V (supplied from the monitor)
Wiring Method(household)		4-wire polarity
Effective Viewing Angle		Horizontal : 55° , Vertical : 40°
Angle Adjustment		30° Left, 30° Right, Center
Horizontal/Vertical Scanning Frequency		15.734 kHz/60Hz, 15.625 kHz/50Hz
Lamp		DRC-4BP : Enclosed infrared LED DRC-4CP : Enclosed white LED(night operation)
Minimum Luminance		0.1 LUX (Up to 30cm in front of the camera)
Ambient Temperature		-10°C ~ +50°C
External Dimensions(mm)		50.2[W] × 118[H] × 52[D]mm
Weight(g)		250g (including B/K)