


Addressable Sounder FD7204

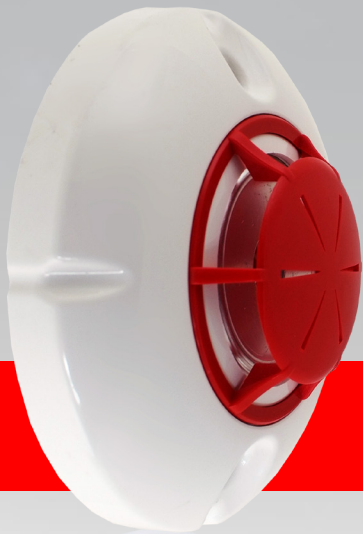

FD7204 is applicable for sound and LED indication of events registered in Interactive Fire Alarm System IFS7000.

FD7204 is certified on EN54-3. The FD7204 sounder is connected to the signal loop of the IFS7002 panel, through the custom UniTalk protocol.

Features

LEDs control:

Duty mode – flash on a period of 16 sec.;

Alarm mode – activated continuous ON;

The flash / activation of the LEDs is programmable from the IFS7002's menus.

Technical data

Maximum number of sounders in the IFS7002 signal loop: 25 pcs.

Voltage:

– 15-30V DC

Current:

– 6mA on 24 V DC

(LED mode, “without flash”)

Sound level, type “Slow whoop” on 1m: 90dB (A)

Frequency, pattern “Slow whoop”: 0.5 – 1,2 kHz

Temperature: from minus 10°C to 50°C

Dimensions: Ø100, h47mm

Weight: 0.075kg.

Protection: IP 40

Construction: ABS



Office building UniPOS,
1 Efr. Nikola Paskalev Str., Mladost 1, Sofia 1748, Bulgaria
Phone: +359 2 97 439 25, +359 2 97 444 69

47 San Stefano Str., Pleven 5800, Bulgaria
Phone: +359 64 891 100

<http://unipos-bg.com/>