


GV-600B Video Capture Card

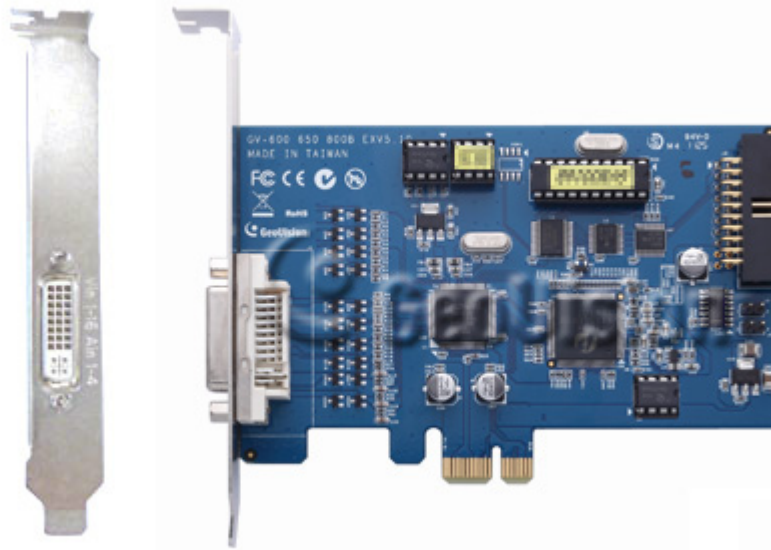

GV-600B Card provides up to 16 video channels and 4 audio channels, recording up to 30 / 25 fps (NTSC / PAL) in total with H.264 software compression.

Specifications

			GV-600B	GV-600B X 2
Interface			PCI-E (x1)	PCI-E (x1) x 2, PCI x 1 + PCI-E (x1) x 1
Input Type			DVI	
Video Input			4, 8, 16 Cams	8, 12, 16, 20, 24, 32 Cams
Audio Input			4 Channels	8 Channels
Recording Rate	CIF	NTSC	4-port: 30 fps 16-port: 30 fps	4+4 port: 60 fps 16+16 port: 60 fps
		PAL	4-port: 25 fps 16-port: 25 fps	4+4 port: 50 fps 16+16 port: 50 fps
	D1	NTSC	4-port: 30 fps 16-port: 15 fps	4+4 port: 60 fps 16+16 port: 30 fps
		PAL	4-port: 25 fps 16-port: 12.5 fps	4+4 port: 50 fps 16+16 port: 25 fps
Display Rate	CIF	NTSC	4-port: 30 fps 16-port: 30 fps	4+4 port: 60 fps 16+16 port: 60 fps
		PAL	4-port: 25 fps 16-port: 25 fps	4+4 port: 50 fps 16+16 port: 50 fps
	D1	NTSC	4-port: 30 fps 16-port: 15 fps	4+4 port: 60 fps 16+16 port: 30 fps
		PAL	4-port: 25 fps 16-port: 12.5 fps	4+4 port: 50 fps 16+16 port: 25 fps
Video Resolution	NTSC	704x480, 704x480 De-interlace, 640x480, 640x480 De-interlace, 352x240, 320x240		
	PAL	704x576, 704x576 De-interlace, 640x480, 640x480 De-interlace, 352x288, 320x240		
Video Compression Format			Geo MPEG4, Geo H264	
Audio Format			16 kHz / 16-bit, 32 kHz / 16-bit)	
GV-NET/IO Card Support			Yes	
Dimensions (W x H)		PCI-E	120 x 82 mm / 4.7 x 3.2 in	
Installation Guide			GV-600B	

Note:

1. GV-600B is currently not compatible with VIA series and ATI series chipset motherboards.
2. 8-port has the same recording rate and display rate as 16-port.
3. Specifications are subject to change without notice.

Minimum System Requirements For One Card, CIF Resolution

OS Supported	32-bit	Windows XP / Vista / 7 / 8 / Server 2008
	64-bit	Windows 7 / 8 / Server 2008 R2 / Server 2012
CPU	Pentium 4, 2.0 GHz	
RAM	Windows XP: 2 x 512 MB Dual Channels Windows Vista / 7 / 8 / Server 2008 / Server 2012 : 2 x 1 GB Dual Channels	
HDD	80 GB	
Graphic Card	AGP or PCI-Express, 800 x 600 (1280 x 1024 recommended), 32-bit color	
DirectX	9.0c	

Minimum System Requirements For Two Cards, CIF Resolution

OS Supported	32-bit	Windows XP / Vista / 7 / 8 / Server 2008
	64-bit	Windows 7 / 8 / Server 2008 R2 / Server 2012
CPU	Pentium 4, 2.6 GHz with Hyper Threading	
RAM	2 x 1 GB Dual Channels	
HDD	160 GB	
Graphic Card	AGP or PCI-Express, 800 x 600 (1280 x 1024 recommended), 32-bit color	
DirectX	9.0c	

Packing List

1. GV-600B Card x 1
2. 1-16 Cams with 4-Port Audio DVI-Type Cable x 1 / 1-8 Cams with 4-Port Audio DVI-Type Cable x 1 / 1-4 Cams with 4-Port Audio DVI-Type Cable x 1
3. Hardware Watchdog Jumper Wire x 1
4. Software DVD x 1

Note: The **1-16 Cams with 4-Port Audio DVI-Type** cable is supplied with GV-600B card with 16 video inputs, the **1-8 Cams with 4-Port Audio DVI-Type** cable is supplied with GV-600B card with 8 video inputs, while the **1-4 Cams with 4-Port Audio DVI-Type** cable is supplied with GV-600B card with 4 video inputs.

Accessories

4 cam video cable



8 cam video cable



16 cam video cable

