


	Item	Description
Power	Power Supply	Power Adapter
	Voltage Range	DC12V-24V
	Consumption	<3W
Ethernet Port	Ethernet Port	LAN Port: 10/100/1000Mbps
	Transmission Distance	LAN port: 0-150m
Fiber Port	Fiber Port	LC Port, SFP Optical Module, Single Fiber or Dual Fiber Optional
	Bandwidth	1.25Gbps
	Transmission Distance	20km, 40km, 60km, 80km, 120km Depend on SFP module performance
Network Standard	Compatible with	IEEE802.3, IEEE802.3u, IEEE802.3ab/z, 10/100/1000BASE-TX and 1000BASE-FX; IEEE802.3 X
LED Status Indicator	Power	1 Red
	Ethernet	1 Green on RJ45 Socket
	Fiber	3 Green (Link, SD, FED)
Protection	ESD	Contact Discharge 6KV Air Discharge 8KV
	Lightning Protection	Power:2KV Signal:1KV Per: IEC61000-4-5
Environmental	Working Temperature	0°C~55°C
	Storage Temperature	-40°C~85°C
	Humidity (non-condensing)	0~95%
Mechanical	Dimension (LxWxH)	26mmx71mmx94mm
	Material	Aluminum Alloy
	Color	Black
	Weight	160g
Stability	MTBF	>30000h

[Connection]

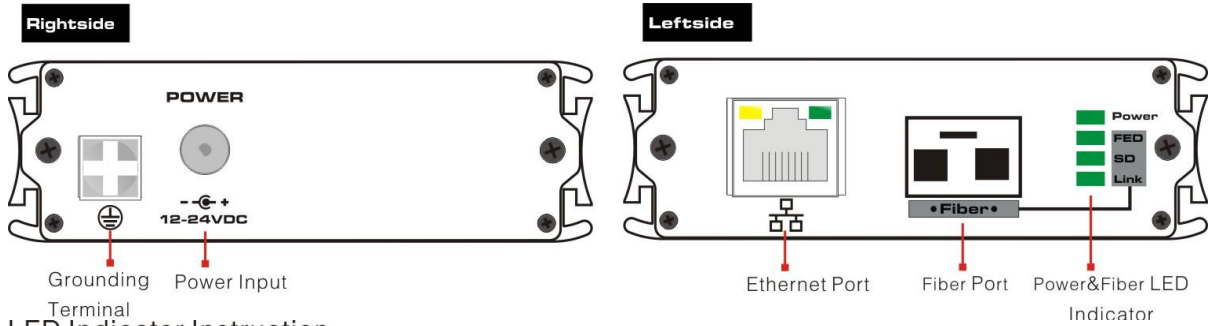

LED Indicator Instruction:

LED	Function	Status	Instruction
Power	Power LED Indicator	On	Power On
		Off	Power Off
FED	SFP Detection Indicator	On	SFP Insert
		Off	Without SFP Insert
SD	Remote Device Failure Detection Indicator	On	Remote Device Failed
		Off	Remote Device Communication Normal
Link	Optical Fiber port Connection Status	On	Connection Normal
		Flicker	Connection Normal And With Data Switch
		Off	Connection Falied
RJ 45 Indicator (Link/Act)	Ethernet Port Connection	On	Ethernet Port Connection Normal
		Flicker	Connection Normal and With Data Switch
		Off	No Connection