




# **NGC-7301F2.8**

**1.3 Megapixels Network IR Water-proof  
Bullet Camera**


## 1.3 Megapixels Network IR Water-proof Bullet Camera

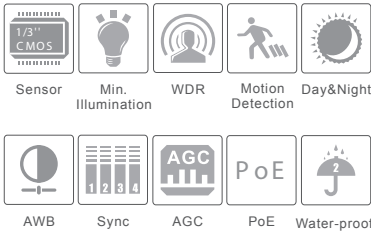

### Features

- 960P ( 1280 x 960 ) full real time coding
- Max. resolution: 1280 x 960
- ICR auto switch, true day / night
- 10 ~ 20m IR night view distance
- 3D DNR, digital WDR
- ROI coding
- PoE power supply
- Support smart phone, iPad, remote monitoring
- Support P2P
- Support triple streams

### Dimensions

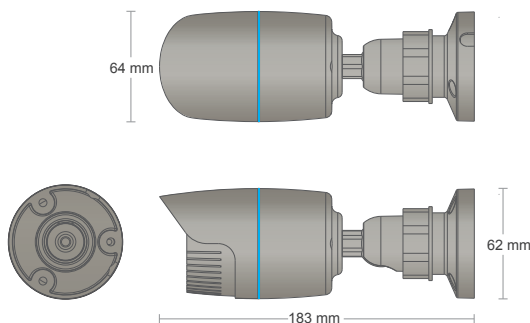

### Specifications

Model	NGC-7301F2.8
<b>Specifications</b>	
<b>Camera</b>	
Image Sensor	1 / 3 "CMOS
Image Size	1280 x 960
Electronic Shutter	1 / 25 s ~ 1 / 100000 s
Min. Illumination	0 Lux ( IR LED ON )
Lens	2.8 mm
Lens Mount	M12
<b>Image</b>	
Video Compression	H.264 / MJPEG
Resolution	960P ( 1280 x 960 )、720P ( 1280 x 720 )、D1、CIF、480 x 240
Multi-stream	1280 x 960 ( 1 ~ 30fps ) / 1280 x 720 ( 1 ~ 30fps ) 1280 x 720 ( 1 ~ 10fps ) / D1 ( 1 ~ 30fps ) / CIF ( 1 ~ 30fps ) CIF ( 1 ~ 30fps ) / 480 x 240 ( 1 ~ 30fps )
Bit rate	64 Kbps ~ 4 Mbps
Encode Mode	VBR / CBR
Quality	Five levels under VBR; Freely adjustable under CBR
Image Settings	Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
<b>Interfaces</b>	
Network	RJ45
Audio	No
<b>Functions</b>	
Remote Monitoring	IE browsing, CMS remote control
Online Connection	Support simultaneous monitoring for up to 4 users; Support multi-stream real time transmission
Protocol	TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
Storage	Network remote storage
Smart Alarm	Motion Alarm
Day & Night	ICR
PoE	Yes
IR Distance	10 ~ 20m
Water-proof	IP66
<b>Others</b>	
Power Supply	DC 12V / PoE
Power Consumption	< 2.5W
IR Consumption ON	< 5W
Operating Environment	- 20 °C ~ 50 °C, 10 % ~ 90 % humidity
Dimensions ( mm )	Φ 64 × 183
Weight ( net )	412 g