


## 3 Megapixels Network IR Waterproof Bullet Camera



### Features

- 3MP ( 2048 x 1536 ) non-realtime coding
- Max resolution: 2048 x 1536
- ICR autoswitch, true day / night 30
- ~ 50m IR night view distance 3D
- DNR, digital WDR
- ROI coding
- Support PoE power supply
- Support smart phone, iPad, remote monitoring
- Support P2P

### Dimensions

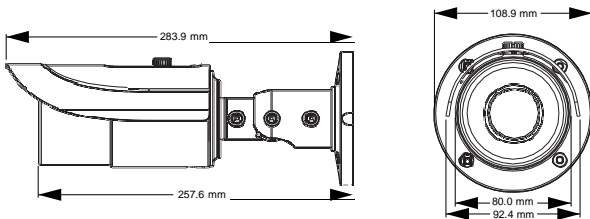

### Specifications

Model	NGC-7321V	
<b>Specifications</b>		
<b>Camera</b>		
Image Sensor	1 / 3 "CMOS	
Image Size	2048 x 1536	
Electronic Shutter	1 / 25 s ~ 1 / 100000 s	
Min. Illumination	0 Lux ( IR LED ON )	
Lens	2.8 ~ 12 mm	
Lens Mount	CS	Φ14
<b>Image</b>		
Video Compression	H.264 / MJPEG	
Resolution	3MP ( 2048 x 1536 )、1080P ( 1920 x 1080 )、720P ( 1280 x 720 )、D1、CIF、480 x 240	
Multi-stream	3MP ( 1 ~ 15fps ) / 1920 x 1080 ( 1 ~ 30fps ) 1280 x 720 ( 1 ~ 10fps ) / D1 ( 1 ~ 30fps ) / CIF ( 1 ~ 30fps ) CIF ( 1 ~ 30fps ) / 480 x 240 ( 1 ~ 30fps )	
Bit rate	64 Kbps ~ 8 Mbps	
Encode Mode	VBR / CBR	
Quality	Five levels under VBR; Freely adjustable under CBR	
Image Settings	ROI coding, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser	
<b>Interfaces</b>		
Network	RJ45	
Storage Card	Optional	
<b>Functions</b>		
Remote Monitoring	IE browsing, CMS remote control	
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission	
Protocol	TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP	
Storage	Optional	
Smart Alarm	Motion Alarm	
Day & Night	ICR	
PoE	Yes	
IR Distance	30 ~ 50 m	
Water-proof	IP66	
<b>Others</b>		
Power Supply	DC 12V / PoE	
Power Consumption	< 4W	
IR Consumption ON	< 8W	
Operating Environment	- 20 °C ~ 50 °C, 10 % ~ 90 % humidity	
Dimensions ( mm )	Φ 109 x 284	
Weight ( net )	1091g	