




# NGC-7325V

2 MP Network IR Water-proof  
Bullet Camera


## 2 MP Network IR Water-proof Bullet Camera

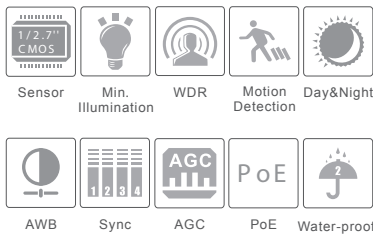

## Features

- 1080P ( 1920 × 1080 ) full real time coding
- Max. resolution: 1920 × 1080
- ICR auto switch, true day / night
- 30 ~ 50m IR night view distance
- 3D DNR, digital WDR
- ROI coding
- Support one-way audio
- Support PoE power supply
- Support smart phone, iPad, remote monitoring
- Support P2P
- IP66 ingress protection
- Support three streams

## Dimensions

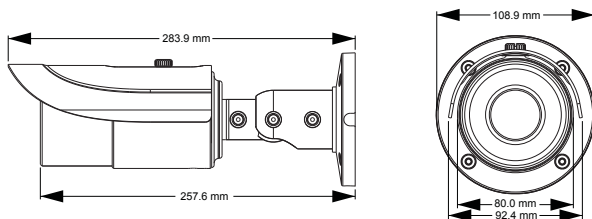

## Specifications

Specifications	Model	NGC-7325V
<b>Camera</b>		
Image Sensor		1 / 2.7" CMOS
Image Size		1920 × 1080
Electronic Shutter		1 / 25 s ~ 1 / 100000 s
Min. Illumination		0.05 lux@F1.2, AGC ON; 0 lux with IR
Lens		2.8 ~ 12 mm @F1.4, angle of view: 89° ~ 34°
Lens Mount		CS and Φ14
Angle Adjustment		Any angle
<b>Image</b>		
Video Compression		H.264 / MJPEG
Resolution		1080P ( 1920×1080 ), 720P ( 1280×720 ), D1, CIF, 480×240
Main Stream		60Hz : 1080P( 1 ~ 30fps ) / 720P( 1 ~ 30fps ) 50Hz : 1080P( 1 ~ 25fps ) / 720P( 1 ~ 25fps )
Bit Rate		64 Kbps ~ 8 Mbps
Encode Mode		VBR / CBR
Quality		Five levels under VBR; Freely adjustable under CBR
Image Settings		ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
<b>Interfaces</b>		
Network		RJ45
Audio		MIC IN × 1
<b>Functions</b>		
Remote Monitoring		IE browsing, CMS remote control
Online Connection		Support simultaneous monitoring for up to 4 users; Support multi-stream real time transmission
Protocol		TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
Storage		Network remote storage
Smart Alarm		Motion Alarm
Day & Night		ICR
PoE		Yes
IR Distance		30 ~ 50 m
Water-proof		IP66
<b>Others</b>		
Power Supply		DC 12V / PoE
Power Consumption		< 3W
IR Consumption ON		< 6.5W
Operating Environment		- 20 °C ~ 50 °C, 10 % ~ 90 % humidity
Dimensions ( mm )		Φ 109 × 284
Weight ( net )		1042g
Installation		Wall mounting, pendent mounting