




NGC-7331


3 Megapixels Network IR Water-proof Bullet Camera

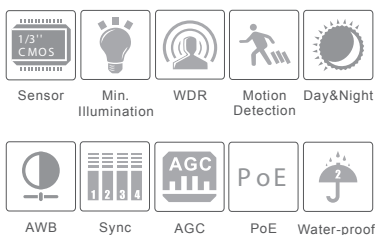

Features

- 3MP (2048 x 1536) full real time coding
- Max. resolution: 2048 x 1536
- ICR auto switch, true day / night
- 20 ~ 30m IR night view distance
- 3D DNR, digital WDR
- ROI coding
- Support one-way audio and PoE power supply
- Support smart phone, iPad, remote monitoring
- Support P2P

Dimensions

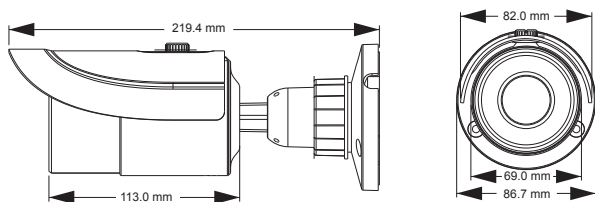

Specifications

Model	NGC-7331
Specifications	
Camera	
Image Sensor	1 / 3 "CMOS
Image Size	2048 x 1536
Electronic Shutter	1 / 25 s ~ 1 / 100000 s
Min. Illumination	0 Lux (IR LED ON)
Lens	6 mm (3.6 mm, 8 mm optional)
Lens Mount	M12
Image	
Video Compression	H.264 / MJPEG
Resolution	3MP (2048 × 1536), 1080P (1920 × 1080), 720P (1280 × 720), D1, CIF, 480 x 240
Multi-stream	3MP (1 ~ 30fps) / 1920 x 1080 (1 ~ 30fps) 1280 x 720 (1 ~ 10fps) / D1 (1 ~ 30fps) / CIF (1 ~ 30fps) CIF (1 ~ 30fps) / 480 x 240 (1 ~ 30fps)
Bit rate	64 Kbps ~ 8 Mbps
Encode Mode	VBR / CBR
Quality	Five levels under VBR; Freely adjustable under CBR
Image Settings	ROI coding, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
Interfaces	
Network	RJ45
Audio	One-way audio (MIC IN × 1)
Functions	
Remote Monitoring	IE browsing, CMS remote control
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission
Protocol	TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
Storage	Network remote storage
Smart Alarm	Motion Alarm
Day & Night	ICR
PoE	Yes
IR Distance	20 ~ 30 m
Water-proof	IP66
Others	
Power Supply	DC 12V / PoE
Power Consumption	< 4W
IR Consumption ON	< 7W
Operating Environment	- 20 °C ~ 50 °C, 10 % ~ 90 % humidity
Dimensions (mm)	Φ 87 × 219
Weight (net)	621 g