




NGC-7332V
3 Megapixels Network Waterproof
Bullet Camera


3 Megapixels Network IR Water proof Bullet Camera

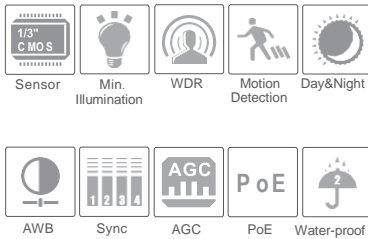

Features

- 3MP (2048 × 1536) full real time coding
- Max resolution: 2048 x 1536
- ICR auto switch, true day / night
- 30 ~ 50m IR night view distance
- Support auto zoom and manual zoom
- 3D DNR, digital WDR
- ROI coding
- Physical wide dynamic optional
- Support local CVBS video output, two-way voice intercom and PoE power supply
- Support smart phone, iPad, remote monitoring
- Support P2P

Dimensions

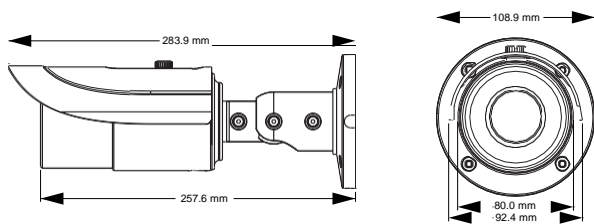

Specifications

Model	NGC-7332V	
Specifications		
Camera		
Image Sensor	1 / 3 "CMOS	
Image Size	2048 x 1536	
Electronic Shutter	1 / 25 s ~ 1 / 100000 s	
Min. Illumination	0 Lux (IR LED ON)	
Lens	2.8 ~ 12 mm optional	
Lens Mount	CS	Φ14
Image		
Video Compression	H.264 / MJPEG	
Resolution	3MP (2048 × 1536) 1080P (1920 × 1080) 720P (1280 × 720) · D1 CIF 480 × 240 ·	
Multi-stream	3MP (1 ~ 30fps) / 1920 × 1080 (1 ~ 30fps) 1280 × 720 (1 ~ 10fps) / D1 (1 ~ 30fps) / CIF (1 ~ 30fps) CIF (1 ~ 30fps) / 480 × 240 (1 ~ 30fps)	
Bit rate	64 Kbps ~ 8 Mbps	
Encode Mode	VBR / CBR	
Quality	Five levels under VBR; Freely adjustable under CBR	
Image Settings	ROI coding, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser	
Interfaces		
Network	RJ45	
Audio	Two-way audio (MIC IN × 1, MIC OUT × 1)	
Video Output	CVBS video output (BNC × 1)	
Storage Card	Support TF card, the max capacity is 64GB	
RS485	Yes	
Alarm Input	1 CH	
Alarm Output	1 CH	
Functions		
Remote Monitoring	IE browsing, CMS remote control	
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission	
Protocol	TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP	
Storage	TF card local storage, network remote storage	
Smart Alarm	Motion Alarm, Sensor alarm	
Day & Night	ICR	
PoE	Yes	
IR Distance	30 ~ 50 m	
Water-proof	IP66	
Others		
Power Supply	DC 12V / PoE	
Power Consumption	< 4W	
IR Consumption ON	< 8W	
Operating Environment	- 20 °C ~ 50 °C, 10 % ~ 90 % humidity	
Dimensions (mm)	Φ 109 × 284	
Weight (net)	About 1134g	