




NGC 7345V

4 MP Network IR Water-proof
Bullet Camera


4 MP Network IR Water-proof Bullet Camera

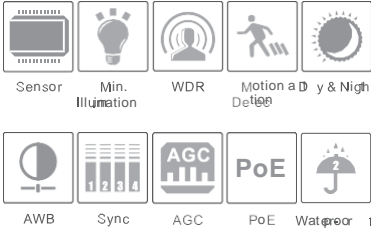

Features

- 4MP (2688 × 1520) non-real time coding
- Max. resolution : 2688 × 1520
- ICR auto switch, true day/night
- 20 ~ 30m IR night view distance
- 3D DNR, digital WDR
- ROI coding
- Support local CVBS video output and one-way audio
- Support POE power supply
- Support smart phone, iPad, remote monitoring
- Support P2P
- Support three streams

Dimensions

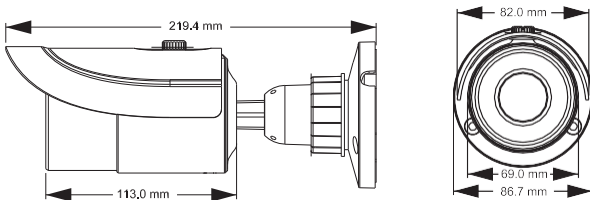

Specifications

| Specifications | Model | NGC 7345V |
|-----------------------|-------|--|
| Camera | | |
| Image Sensor | | 1/3 "CMOS |
| Image Size | | 2688 × 1520 |
| Electronic Shutter | | 1 / 25 s ~ 1 / 100000 s |
| Min. Illumination | | 0.05 lux @ 1.F. 2 AGC ON; 0 lux with IR |
| Lens | | 3.3 ~ 12 mm |
| Image | | |
| Video Compression | | H.264 / MJPEG |
| Resolution | | 4MP (2688×1520), 2K(2560×1440), 3MP (2304× 296), 1080P (1920×1080), 720P (1280×720), D1, CIF, 480×240 |
| Maintenance | | 60Hz : 4MP (1 ~ 15fps) / 2K(1 ~ 25fps) / 3MP(1 ~ 30fps) / 1080P(1 ~ 30fps) / 720P(1 ~ 30fps) 50Hz : 4MP (1 ~ 12fps) / 2K(1 ~ 25fps) / 3MP(1 ~ 25fps) / 1080P(1 ~ 25fps) / 720P(1 ~ 25fps) |
| Bit Rate | | 64 Kbps ~ 8 Mbps |
| Encode Mode | | VBR / CBR |
| Quality | | Five levels under VBR; Freely adjustable under CBR |
| Image Settings | | ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser |
| Interfaces | | |
| Network | | RJ45 |
| Audio | | MIC IN × 1 |
| Video Output | | CVBS video output (BNC × 1) |
| Functions | | |
| Remote Monitoring | | IE browser, CMS remote control |
| Online Monitoring | | Support simultaneous monitoring up to 10 users; Support multi-stream real time transmission |
| Protocol | | TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP |
| Storage | | Network remote storage |
| Smart Alarm | | Motion Alarm |
| Day & Night | | ICR |
| PoE | | Yes |
| IR Distance | | 20 ~ 30 m |
| Waterproof | | IP66 |
| Others | | |
| Power Supply | | DC 12V / PoE |
| Power Consumption | | < 3.5W |
| IR Consumption ON | | < 6W |
| Operating Environment | | -20 °C ~ 50 °C, 10 % ~ 90 % humidity |
| Dimensions (mm) | | Φ 87 × 219 |
| Weight (net) | | 608g |
| Installation | | Wall mounting, pendant hanging |