


NGC-7351F

5MP Network IR Water-
proof Bullet Camera



- 5MP (2592 × 1944) H.265 full real time coding
- Max.resolution: 2592 × 1944
- ICR auto switch, true day / night, ROI coding
- 3D DNR, true WDR, HLC, BLC, defog
- 20~30m IR night view distance
- Support CVBS video output and one-way audio
- Support smart phone, iPad, remote monitoring
- DC12V/PoE power supply
- P2P function optional
- IP 66 ingress protection; Support three streams
- Support face detection
- Smart analytics (optional): object removal detection, abnormal video signal detection, line crossing detection, region intrusion detection, people intrusion detection, people counting detection, crowd density detection, etc.

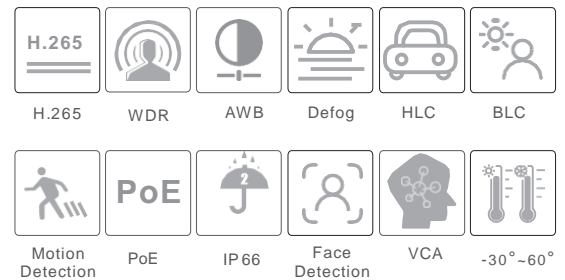


NGC-7351F

5MP Network IR Water-proof Bullet Camera

SPECIFICATIONS

| Specifications | Model | NGC-7351F |
|----------------------------|-------|--|
| Camera | | |
| Image Sensor | | 1 / 2.5 "CMOS |
| Image Size | | 2592×1944 |
| Electronic Shutter | | 1 / 25 s ~ 1 / 100000 s |
| Iris Type | | Fixed Iris |
| Min. Illumination | | 0.036 lux @F2.0, AGC ON; 0 lux with IR 0.013 lux @ F1.2, AGC ON; 0 lux with IR |
| Lens | | 2.8 mm @F1.85, horizontal field of view:101° 3.6 mm @F1.6, horizontal field of view:79° 3.3 ~ 12 mm @F1.4, horizontal field of view:93.9° ~ 34.8° |
| Lens Mount | | M12 or Φ14 optional |
| Wide Dynamic Range | | 120dB |
| BLC | | Yes |
| HLC | | Yes |
| Defog | | Yes |
| Digital NR | | 3D DNR |
| Angle Adjustment | | Pan: 0°~360°; Tilt:0°~90°; Rotation: 0°~360° |
| Image | | |
| Video Compression | | H.265 / H.264 / MJPEG |
| H.264 Compression Standard | | Baseline Profile/Main Profile/High Profile |
| Resolution | | 5MP (2592 ×1944), 4MP (2592 ×1520), 2K (2560 ×1440), 3MP (2304 ×1296), 1080P (1920 ×1080), 720P (1280 ×720), D1, CIF, 480×240 |
| Main Stream | | 60Hz : 5MP(1~30fps)/4MP(1~30fps)/ 2K(1~30fps)/ 3MP(1~30fps)/ 1080P(1~60fps)/ 720P(1~30fps) 50Hz : 5MP(1~25fps)/ 4MP (1~25fps) / 2K (1~25fps) / 3MP (1~25fps) / 1080P (1~50fps) / 720P (1~25fps) |
| Sub Stream | | 60Hz : 720P(1~15fps)/D1(1~30fps)/CIF (1~30fps); 50Hz:720P(1~15fps)/D1(1~25fps)/CIF (1~25fps) |
| Third Stream | | 60Hz : D1/CIF/480x240 (1~30fps); 50Hz: D1/CIF/480x240 (1~25fps) |
| Bit Rate | | 128 Kbps ~ 10 Mbps |
| Bit Rate Type | | VBR / CBR |
| Audio Compression | | G711A / U |
| Image Settings | | ROI, Saturation, Brightness, Chroma, Contrast,Wide Dynamic, Sharpen, NR,etc. adjustable through client software or web browser |
| ROI | | Each ROI to be configured separately |
| Interfaces | | |
| Network | | RJ45 |
| Video Output | | CVBS output (BNC ×1) |
| Audio | | MIC IN ×1 |
| Storage | | No |
| Hardware Reset | | No |
| Functions | | |
| Remote Monitoring | | Web browsing,CMS remote control |
| Online Connection | | Support simultaneous monitoring for up to 6 users; Support multi-stream real time transmission |
| Network Protocol | | UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, SNMP, 802.1x, UPnP, HTTPs, QoS |
| Interface Protocol | | ONVIF, GB-T/28181-2011 |
| Storage | | Network remote storage |
| Smart Alarm | | Motion detection |
| Intelligent Analytics | | Face detection (object removal detection, regional intrusion detection, abnormal video detection, line crossing detection, people intrusion, people counting and crowd density detection are optional) |
| General function | | Watermark, IP address filtering, video mask, heartbeat, password protection |
| PoE | | Yes |
| IR Distance | | 20 ~ 30 m |
| Ingress Protection | | IP66 |

| Others | |
|-----------------------|--|
| Power Supply | DC12V/PoE |
| Power Consumption | < 8W |
| Operating Environment | - 30 °C ~ 60 °C (-22°F~140°F) Humidity: less than 95 % (non-condensing) |
| Dimensions (mm) | Φ 87 ×219 |
| Weight (net) | 0.6KG |
| Installation | Ceiling mounting; Wall mounting |

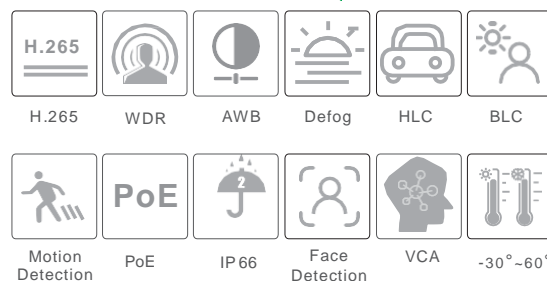

DIMENSIONS

