




# NGC-7356V

5 MP Network IR Water-proof  
Bullet Camera

---

# NGC-7356V


## 5 MP Network IR Water-proof Bullet Camera

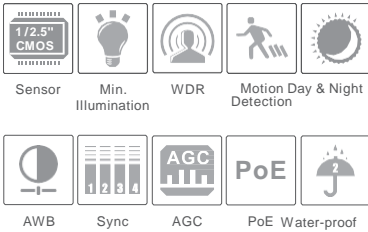

### Features

- 5MP (2592 × 1944) H.265 full real time coding
- Max. resolution: 2592 × 1944
- ICR auto switch, true day / night
- 30 ~ 50m IR night view distance
- 3D DNR, true WDR, HLC & BLC
- Motorized zoom lens optional
- ROI coding
- Support local CVBS video output and two-way audio
- Support hardware reset
- Support PoE power supply
- Support smart phone, iPad, remote monitoring
- Support P2P
- IP66 ingress protection
- Support three streams
- Support smart analysis, including object removal detection, line crossing detection, intrusion detection, etc.

### Dimensions

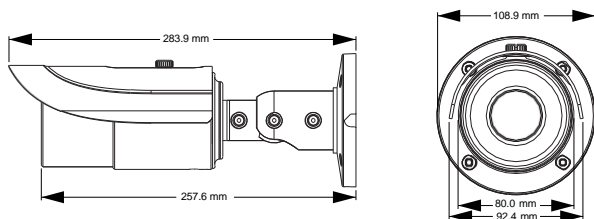

### Available Accessories



NAV-DJD



NAV-DJD + NAV-SAS



NAV-DJD + NAV-SAC

### Specifications

| Specifications             | Model | NGC-7356V   |
|----------------------------|-------|---|
| <b>Camera</b>              |       |   |
| Image Sensor               |       | 1 / 2.5 "CMOS   |
| Image Size                 |       | 2592×1944   |
| Electronic Shutter         |       | 1 / 25 s ~ 1 / 100000 s   |
| Iris Type                  |       | Fixed Iris  |
| Min. Illumination          |       | 0.03 lux@F1.2, AGC ON; 0 lux with IR  |
| Lens                       |       | 3.3 ~ 12 mm @F1.4, horizontal field of view:93.9° ~ 34.8°   |
| Lens Mount                 |       | Φ14   |
| Day & Night                |       | ICR   |
| Wide Dynamic Range         |       | 120dB   |
| BLC                        |       | Yes   |
| HLC                        |       | Yes   |
| Digital NR                 |       | 2D / 3D DNR   |
| Angle Adjustment           |       | Any angle   |
| <b>Image</b>               |       |   |
| Video Compression          |       | H.265 / H.264 / MJPEG   |
| H.265 Compression Standard |       | Main Profile @Leve4.1 High Tier   |
| Resolution                 |       | 5MP ( 2592×1944 ), 4MP ( 2560×1440 ), 1080P ( 1920×1080 ), 720P ( 1280×720 ), D1, CIF,480×240   |
| Main Stream                |       | 60Hz : 5MP( 1 ~ 30fps ) / 4MP( 1 ~ 30fps ) / 1080P( 1 ~ 60fps ) / 720P( 1 ~ 30fps )<br>50Hz : 5MP( 1 ~ 25fps ) / 4MP( 1 ~ 25ps ) / 1080P( 1 ~ 50fps ) / 720P( 1 ~ 25fps ) |
| Bit Rate                   |       | 128 Kbps ~ 10 Mbps  |
| Encode Mode                |       | VBR / CBR   |
| Quality                    |       | Five levels under VBR; Freely adjustable under CBR  |
| Image Settings             |       | ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser  |
| Audio Compression          |       | G711A / U   |
| ROI                        |       | Each ROI to be configured separately  |
| <b>Interfaces</b>          |       |   |
| Network                    |       | RJ45  |
| Audio                      |       | MIC IN × 1, MIC OUT × 1   |
| Video Output               |       | CVBS video output ( BNC × 1 )   |
| Storage Card               |       | Support TF card, up to 128GB  |
| RS485                      |       | Yes   |
| Alarm Input                |       | 1 CH  |
| Alarm Output               |       | 1 CH  |
| <b>Functions</b>           |       |   |
| Remote Monitoring          |       | IE browsing, CMS remote control   |
| Online Connection          |       | Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission   |
| Network Protocol           |       | TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP  |
| Interface Protocol         |       | ONVIF, GB-T/28181-2011  |
| Storage                    |       | TF card local storage, network remote storage   |
| Smart Alarm                |       | Motion alarm, sensor alarm  |
| PTZ                        |       | RS485 × 1   |
| PoE                        |       | Yes   |
| IR Distance                |       | 30 ~ 50 m   |
| Water-proof                |       | IP66  |
| <b>Others</b>              |       |   |
| Power Supply               |       | DC 12V / PoE  |
| Power Consumption          |       | < 9W  |
| Operating Environment      |       | - 20 °C ~ 50 °C, 10 % ~ 90 % relative humidity  |
| Dimensions ( mm )          |       | Φ 109 × 284   |
| Weight ( net )             |       | 1110g   |
| Installation               |       | Wall mounting, pendent mounting   |