




# **NGC-7521**

20x1080P Network HD High Speed Dome Camera


## 20x 1080P Network HD High Speed Dome camera

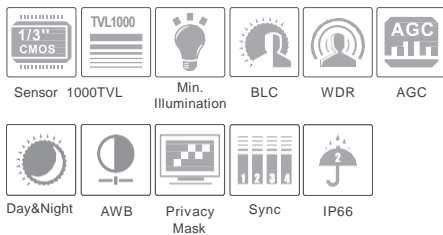

### Features

- 1 / 3" Progressive Scan CMOS, 20x optical zoom
- HD Network Video Output : 1920 x 1080@25 /30fps
- H.264 image compression format
- TCP / IP, UDP, DHCP, DDNS, NTP, RTSP, SMTP, FTP, PPPoE
- SD card local storage, network remote storage
- Web GUI Menu
- Support selected area amplification and PTZ function
- Provide standard SDK, easy to integrate with other digital system
- CVBS Video Output
- IP66 Weather-proof ; 4KV lightning protection, surge protection

### Dimensions

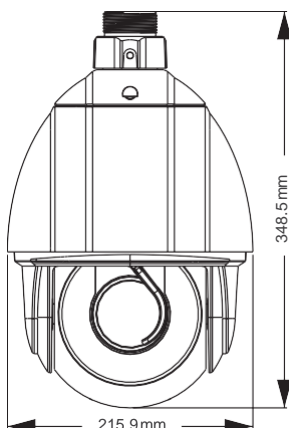

### Specification

Model	NGC-7521
<b>Specifications</b>	
<b>Camera</b>	
Image Sensor	1 / 3" Inch Progressive CMOS
Effective Pixels	1920 x 1080 2Mega
Horizontal Resolution	1000TVL
Min. Illumination	0,5Lux ( Day ), 0,1Lux ( Night ), 0.05Lux ( DSS ON)
White Balance	Auto / Manual
S/N Ratio	> 50dB
Day/Night	Auto / Manual
Focus Mode	Auto / Manual
Lens	20x Zoom, f = 4.7 ~ 94 mm, F1.6 ~F3.5
<b>PTZ</b>	
Pan Range	360°endless rotation
Pan Speed	Preset Speed : 240°/s; Manual Control Speed : 0.5 ~90°/s
Tilt Range	0 ~ 90° ( auto rotation )
Tilt Speed	Preset Speed : 240°/s; Manual Control Speed : 0.5 ~90°/s
<b>System</b>	
PTZ Control	Yes
Preset	255
Patrol	8
Trace	4
Time Task	8
Scan	2
Home Position Display	Yes
Auto Flip	Yes
Alarm Input	7 CH ( NC / NO )
Alarm Output	1 CH
Alarm Linkage	Yes
Self Cleaning	Yes ( windshield wiper )
<b>Network</b>	
Compression	H.264
Frame Rate	1 ~ 30fps ( 25fps )
Protocol	TCP / IP, UDP, DHCP, DDNS, NTP, RTSP, SMTP, FTP, PPPoE
Storage	SD card local storage, network remote storage
Smart Alarm	Motion Alarm Sensor Alarm
Resolution	1920 x 1080, 1280 x 720,640 x 480,320 x 240,160 x120
Multi-stream	Yes
<b>Port</b>	
Network Interface	10Base-T / 100Base-TX, RJ45
Audio	MIC input x 1
Analog Output	CVBS
<b>Others</b>	
Control	RS485 / Network
Power Supply	AC 24V 3000mA
Power Consumption	15W ( max 35W, Heater on)
Working Environment	Temperature : - 20°C ~ 60°C; Humidity : less than 95%
Protection Level	IP66
Weight	3.5KG
Dimensions	Φ216 mm x 349 mm