




NGC-7536LR

**20× 3MP Network IR HD High Speed
Dome Camera**

NGC-7536LR


20× 3MP Network IR HD High Speed Dome Camera



Features

- 1 / 2.8" progressive CMOS, 20× optical zoom
- Auto iris, auto focus, auto white balance, BLC and 3D DNR
- HD network video output : 2048 × 1536 @ 30fps
- H.265 and H.264 image compression format
- TCP / IP, UDP, DHCP, DDNS, NTP, RTSP, SMTP, FTP, PPPoE, IPv4 / IPv6
- SD card local storage, network remote storage
- Web GUI Menu
- Efficient IR array and laser illumination, low power consumption and up to 150m IR night view distance
- IR LEDs and matching algorithm for ideal image condition by adjusting the brightness and angle of the IR LEDs based on the zoom ratio and distance
- Built-in heat treatment device to lower the inside temperature and avoid fogging of the camera rear cover
- Using 3D intelligent position function through the DVR, client software and IE to realize tracking and amplification
- Support RS485 control and Pelco-P / D protocol
- Power off memory — restoring the PTZ and lens status automatically to its previous status (the status just before the dome is powered off) after the dome is powered on
- IP66 ingress protection; TVS 6KV lightning protection, surge protection
- 1 CH audio input and 1 CH audio output
- Precision motor driving, sensitive and responsive, smoothly running, less than 0.1° precision error and no image floating at any speed
- Support home position function

Dimensions

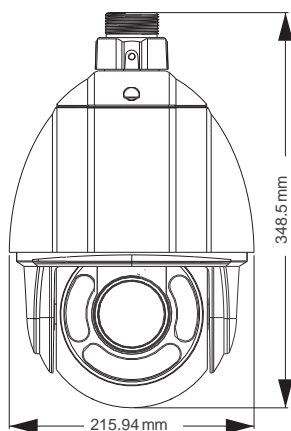

Specifications

Specifications	Model	NGC-7536LR
Camera Module		
Image Sensor		1 / 2.8" Progressive Scan CMOS
Effective Pixels		3Mega
White Balance		Auto / Manual
AGC		Auto / Manual
3D DNR		Yes
Lens		
Focal Length		5.5 ~ 110 mm
Function		
Pan Range		360° endless rotation
Pan Speed		Manual control speed: 0.1° ~ 120°/s; preset speed: 240°/s
Tilt Range		0 ~ 93°
Tilt Speed		Manual control speed: 0.1° ~ 90°/s; preset speed: 200°/s
Zoom		Yes
Reset		360 presets
Cruise		8 cruises, 16 presets for each cruise
Scan		2 scans
Track		4 tracks, 3 minutes' recording for each track
Time Task		Yes
Home Position		Yes
Power Off Memory		Yes
IR Function		
IR Distance		150 m
IR Control		Brightness and angle of the IR LEDs to be smartly adjusted according to the scenes
Network		
Max Image Size		2048 × 1536
Resolution		3MP (2048 × 1536), 2MP (1920 × 1080), 1.3MP (1280 × 960), VGA (640 × 480)
Video Compression		H.265 / H.264 / MJPEG
Video Compression Protocol		G.711A / G.711U
Network Protocol		TCP / IP, UDP, DHCP, DDNS, NTP, RTSP, SMTP, FTP, PPPoE, IPv4 / IPv6
Preview Video channels		Max 10 CH
System Integration		
Alarm Input		7 CH (5 ~ 12V DC)
Alarm Output		1 CH, support alarm trigger (preset, snap, FTP upload and email trigger)
Network Interface		Built-in RJ45 network port, support 10M / 100M network data
SD Card Interface		Built-in Micro SD card slot, support manual recording
CVBS Output		1.0V [p-p] / 75Ω, PAL or NTSC, BNC
RS485 Control		PelcoD / P protocol, custom protocols available
API		API, SDK, ONVIF, GB / T28181
Web Client		Web 4.0
General Specifications		
OSD Menu		Chinese / English
Power Supply		AC 24V 3000 mA (15W, max 65W)
Working Environment		-30 ~ 60°C; humidity: less than 90%
Protection Level		IP66, IK10, TVS6KV lightning protection, surge protection