



Declaration of Conformity



Type of equipment: NETWORK CAMERA
Brand Name /Trade Mark: HANWHA
Type designation /model: SCD-6023RP
Applicant: Hanwha Techwin Company Limited

In accordance with the following Directives:

2004/108/EC The Electromagnetic Compatibility Directive
Including amendments by the CE Marking Directive 93/68/EEC

2011/65/EU Restriction of the use of certain hazardous substances in electrical and electronic equipment (recast)

The following harmonized European standards or technical specifications have been applied:

EN 55022:2010	Limits and methods of measurement of radio disturbance characteristics of information technology equipment
EN 50130-4:2011+A1:2014	Product family standard: Immunity requirements for components of fire, intruder and social alarm systems
EN 61000-4-2:2009	Electrostatic discharge immunity test
EN 61000-4-3:2006+A2:2010	Radiated, radio-frequency, electromagnetic field immunity test
EN 61000-4-4:2012	Electrical fast transient/burst immunity test
EN 61000-4-5:2014	Surge immunity test
EN 61000-4-6:2009	Immunity to conducted disturbances, induced by radio-frequency fields

The CE Marking on the products and/or their packaging signifies that Hanwha Techwin Company Limited holds the reference technical file available to the European Union authorities.

Place and date of issue: 1204, Changwon-daero, Seongsan-gu, Changwon-si, Gyeongsangnam-do, Korea / Jan 25, 2015

Authorized Signatory: Name : Jei Soon, Kang
Title : Principal Research Engineer

Signatur :



EMC TEST REPORT For CE

Test Report No. : KES-E1-16T0008
Date of Issue : Jan. 22, 2016
Product name : ANALOG CAMERA
Model/Type No. : SCD-6023RP
Variant Model : -
Applicant : Hanwha Techwin Company Limited
Applicant Address : 1204, Changwon-daero, Seongsan-gu, Changwon-si,
Gyeongsangnam-do, korea
Manufacturer : Tianjin Samsung Techwin Opto-Electronic Co., Ltd.
Manufacturer Address : No.11 Weiliu Rd, Micro-Electronic Industrial Park, TEDA,
Tianjin, 300385, People's Republic of China
Date of Receipt : Jan. 06, 2016
Test date : Jan. 18, 2016 – Jan. 20, 2016
Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

Tested by

Hyo Jin, Kim
EMC Test Engineer

Reviewed by

Dong-Hun, Jang
EMC Technical Manager

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0008
Page (2) of (58)

REPORT REVISION HISTORY

Date	Test Report No.	Revision History
Jan. 22, 2016	KES-E1-160008	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



TABLE OF CONTENTS

1.0	General Product Description	4
1.1	Test Voltage & Frequency	6
1.2	Variant Model Differences.....	6
1.3	Device Modifications	6
1.4	Equipment Under Test.....	6
1.5	Support Equipments	6
1.6	External I/O Cabling	7
1.7	E.U.T Operating Mode(s).....	7
1.8	Configuration.....	8
1.9	Calibration Details of Equipment Used for Measurement.....	9
1.10	Test Facility	9
1.11	Laboratory Accreditations and Listings	9
2.0	Test Regulations.....	10
2.1	Conducted Emissions at Mains Power Ports.....	12
2.2	Conducted Emissions at Telecommunication Ports	13
2.3	Radiated Electric Field Emissions(Below 1 GHz)	14
2.4	Radiated Electric Field Emissions(Above 1 GHz).....	15
2.5	Harmonic Current Emissions.....	16
2.6	Voltage Fluctuations and Flicker	17
3.0	Criteria for compliance.....	18
3.1	Electrostatic Discharge.....	20
3.2	Radiated Electric Field Immunity	23
3.3	Electrical Fast Transients/Bursts	25
3.4	Surge Transients	27
3.5	Conducted Disturbance	29
3.5	Power Frequency Magnetic Field Immunity	32
3.6	Voltage Dips and Short Interruptions	34
APPENDIX A	– TEST DATA.....	36
	Conducted Emissions at Mains Power Ports.....	36
	Conducted Emissions at Telecommunication Ports	38
	Radiated Electric Field Emissions(Below 1 GHz)	40
	Radiated Electric Field Emissions(Above 1 GHz).....	41
	Harmonic Current Emissions and Voltage Fluctuations and Flicker	45
	Main Board EUT Internal View – Main Board	56
	Main Board EUT Internal View – Camera Board.....	57
	Main Board EUT Internal View – IR Board.....	58



1.0 General Product Description

Main Specifications of E.U.T are:

specifications

SPECIFICATIONS

SCD-6023RN		SCD-6023RP
Video		
Imaging Device	1/2.9" 2M CMOS	
Total Pixels	2,000(H) x 1,121(V) 2.24M pixels	
Effective Pixels	1,984(H) x 1,105(V) 2.19M pixels	
Scanning System	Progressive Scan	
Horizontal Resolution	1000TVL	
Min. Illumination	Color : 0.45Lux (F2.1, 50IRE); 0.25Lux (F2.1, 30IRE) B/W : 0Lux(IR LED on)	
S / N Ratio	52dB (AGC off, Weight on)	
Video Output	BNC(AHD, CVBS Selectable)	
Resolution	1920 x 1080	
Max. Framerate	30fps @1080p, 30fps@ 720p	
Lens Type		
Focal Length (Zoom Ratio)	4mm	
Max. Aperture Ratio	F2.1	
Angular Field of View	H : 82.2° / V : 44.1° / D : 97.8°	
Min. Object Distance	0.5m (1.64ft)	
Focus Control	Manual	
Lens Type	Fixed	
Mount Type	Board-in type	
Operational		
On Screen Display	Multi-language Support(16) English, Japanese, Spanish, French, Portuguese, Korean, German, Italian, Russian, Polish, Czech, Romanian, Serbian, Swedish, Danish, Turkish	
Camera Title	Off / On (Displayed 15 characters)	
Day & Night	Auto (ICR) / Color / B/W	
Backlight Compensation	Off / User BLC / HLC	
Wide Dynamic Range	D-WDR	
Digital Noise Reduction	SSNR4 (Off / On)	
Defog	AUTO / MANUAL / OFF	

30_ specifications



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-EI-16T0008
Page (5) of (58)

	SCD-6023RN	SCD-6023RP
Motion Detection	Off / On(4 zones)	
Privacy Masking	Off / On (4 zones rectangle)	
Gain Control	Off / Low / Middle / High / Very High	
White Balance	ATW / Outdoor / Indoor / Manual / AWC(1,800K° ~ 10,500K°)	
Electronic Shutter Speed	1 sec ~ 1/12,000 sec	
Reverse	Off / H-Rev / V-Rev / HV-Rev	
Profile	Basic, Day & Night, Backlight, ITS, Indoor, User	
Alarm	Not support	
Remote control interface	Coaxial	
Protocol	Coax : ACP	
IR Distance	15m(49.21ft)	
Video Transmission Distance	500m(75-5 Coaxial Cable)	
Environmental		
Operating Temperature / Humidity	-10°C ~ +55°C (+14°F ~ +131°F) / Less than 90% RH	
Electrical		
Input Voltage	12VDC±10%	
Power Consumption	Max. 4.2W	
Mechanical		
Color / Material	Ivory / Plastic	
Dimension (WxHxD)	88X Ø110mm	
Weight	231g	

● SPECIFICATIONS

※ The specification for this product may change without prior notice for product improvement.

English_31

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage ☐ 220 Vac ☐ 230 Vac ☐ 240 Vac ☐ 24 Vac ☒ 12 Vdc
Frequency ☐ 50 Hz ☐ 60 Hz ☐ Hz

1.2 Variant Model Differences

Not applicable

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
ANALOG CAMERA	SCD-6023RP	-	Tianjin Samsung Techwin Opto-Electronic Co., Ltd.	E.U.T

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
MONITOR	M1950DM	-	204KCXM31738	-
AC/DC Adapter	PA-1650-68	OE9FA612314100070	LITE-ON TECHNOLOGY CORPORATION	-
				-
				-



1.6 External I/O Cabling

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
ANALOG CAMERA	BNC	MONITOR	RCA	5.0	U

* Unshielded=U, Shielded=S


1.7 E.U.T Operating Mode(s)

Equipment under test was operated during the measurement under the following conditions:

Test mode	Normal operating
OP	MONITOR CHECK

1.8 Configuration

■ AC Main
□ DC Main

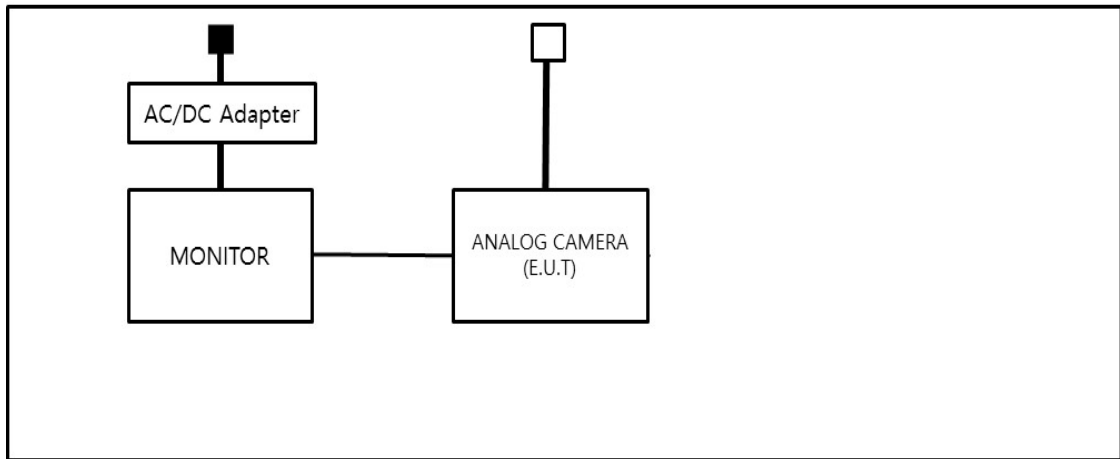







1.9 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.10 Test Facility

The measurement facility is located at 473-29 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22.

1.11 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3 & 10 meter Open Area Test Sites and one conducted site to perform FCC Part 15/18 measurements.	
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-4308, C-4798, T-2311, G-914
KOREA	MSIP	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
Canada	IC	3 & 10 meter Open Area Test Sites and one conducted site	 4769B-1
Europe	CE	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	
International	KOLAS	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	

2.0 Test Regulations

The emissions tests were performed according to following regulations:

☒ **EMC – Directive 2004/108/EC**

☐ EN 61000-6-3:2011

☐ EN 61000-6-1:2007

☐ EN 61000-6-4:2007 +A1:2011

☐ EN 61000-6-2:2005

☐ EN 55011:2007 +A1:2010

☐ Group 1
☐ Class A

☐ Group 2
☐ Class B

☐ EN 55014-1:2006 +A2:2011

☐ EN 55014-2:1997 +A2:2008

☐ EN 55015:2013

☒ EN 55022:2010

☒ Class A

☐ Class B

☐ EN 55024:2010

☒ EN 50130-4:2011 +A1:2014

☐ EN 61000-3-2:2014

☒ EN 61000-3-3:2013

☐ EN 61326-1:2013

☐ VCCI V-3 / 2013.04

☐ Class A

☐ Class B

☐ AS / NZS CISPR22:2009 +A1:2010

☐ Class A

☐ Class B

☐ 47 CFR Part 15, Subpart B / ANSI C63.4-2009

☐ Class A

☐ Class B

☐ IC Regulation ICES-003 : 2012
/ ANSI C63.4-2014

☐ Class A

☐ Class B

☐ CISPR 22:2009 +A1:2010

☐ Class A

☐ Class B



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0008
Page (11) of (58)

☐ **R&TTE – Directive 1999/5/EC**

☐ EN 301 489-1 V1.9.2

- ☐ Equipment for fixed use
- ☐ Equipment for vehicular use
- ☐ Equipment for portable use

☐ EN 301 489-3 V1.6.1

☐ EN 301 489-17 V2.2.1

☐ EN 60945:2002

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



2.1 Conducted Emissions at Mains Power Ports

Test Date

N/A

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input type="checkbox"/>	EMI Test Receiver	ESR3	R&S	101783	05, 06, 2016
<input type="checkbox"/>	LISN	ENV216	R&S	101137	02, 10, 2016
<input type="checkbox"/>	LISN	ENV216	R&S	101786	05, 06, 2016
<input type="checkbox"/>	Electro wave Shieldroom	-	SEMITEC	-	-

Test Conditions

Temperature: °C
Relative Humidity: %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

Remarks

See Appendix A for test data.

2.2 Conducted Emissions at Telecommunication Ports

Test Date

N/A

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input type="checkbox"/>	EMI Test Receiver	ESR3	R&S	101783	05, 06, 2016
<input type="checkbox"/>	LISN	ENV216	R&S	101137	02, 10, 2016
<input type="checkbox"/>	LISN	ENV216	R&S	101786	05, 06, 2016
<input type="checkbox"/>	8-Wire ISN CAT3	CAT3 8158	Schwarzbeck Mess	8158-0019	04, 02, 2016
<input type="checkbox"/>	8-Wire ISN CAT5	CAT5 8158	Schwarzbeck Mess	8158-0030	04, 02, 2016
<input type="checkbox"/>	8-Wire ISN CAT6	NTFM 8158	Schwarzbeck Mess	8158-0029	08, 14, 2016
<input type="checkbox"/>	Electro wave Shieldroom	-	SEMITEC	-	-

Test Conditions

Temperature: °C

Relative Humidity: %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- ☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

Jan. 18, 2016

Test Location

☐ Open Area Test Site #1

☒ Open Area Test Site #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test Receiver	ESR3	R&S	101781	05, 06, 2016
<input checked="" type="checkbox"/>	Trilog-Broadband Antenna	VULB 9163	SCHWARZBECK	9168-713	05, 15, 2017
<input checked="" type="checkbox"/>	Open Area Test Site	-	KES	-	-
<input checked="" type="checkbox"/>	Antenna Mast	-	DAEIL EMC	-	-
<input checked="" type="checkbox"/>	Turn Table	-	DAEIL EMC	-	-

Test Conditions

Temperature: -2,3 °C

Relative Humidity: 57 %

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

☒ PASS

☐ NOT PASS

☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

Jan. 18, 2016

Test Location

Semi Anchoic Chamber #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test Receiver	ESU26	R&S	100552	05, 06, 2016
<input checked="" type="checkbox"/>	Broadband Coaxial Preamplifier	BBV 9718	Schwarzbeck Mess - Elektronik	9718-246	10, 23, 2016
<input checked="" type="checkbox"/>	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	05, 07, 2017
<input checked="" type="checkbox"/>	Semi Anchoic Chamber #2	-	SEMITEC	-	-
<input checked="" type="checkbox"/>	Antenna Mast	-	AUDIX	-	-
<input checked="" type="checkbox"/>	Turn Table	-	AUDIX	-	-

Test Conditions

Temperature: 19,1 °C

Relative Humidity: 36,6 %

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- ☒ PASS
☐ NOT PASS
☐ NOT APPLICABLE

Remarks

See Appendix A for test data.



2.5 Harmonic Current Emissions

Test Date

N/A

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input type="checkbox"/>	AC Source	ACS 500 N	EM TEST	V1024106760	08, 13, 2016
<input type="checkbox"/>	Digital Power Analyzer	DPA 500 N	EM TEST	V1024106759	08, 13, 2016

Test Conditions

Temperature: °C
Relative Humidity: %

Classification of Equipment for Harmonic Current Emissions

- ☐ Class A
- ☐ Class B
- ☐ Class C(Below 25 W)
- ☐ Class C(Above 25 W)
- ☐ Class D

Test Results

The requirements are:

- ☐ PASS
- ☐ NOT PASS
- ☒ NOT APPLICABLE

Remarks

Because the E.U.T power is less than 75 W, limits are not specified.
See Appendix A for test data.



2.6 Voltage Fluctuations and Flicker

Test Date

N/A

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input type="checkbox"/>	AC Source	ACS 500 N	EM test	V1024106760	08, 13, 2016
<input type="checkbox"/>	Digital Power Analyzer	DPA 500 N	EM test	V1024106759	08, 13, 2016

Test Conditions

Temperature: °C
Relative Humidity: %

Test Results

The requirements are:

- ☐ PASS
☐ NOT PASS
☒ NOT APPLICABLE

Remarks

See Appendix A for test data.

3.0 Criteria for compliance

Criteria for compliance was based on the following guidelines:

EN 50130-4:2011 +A1:2014 Alarm systems-Part 4: Electromagnetic compatibility Product family standard: Immunity requirements for components of fire, intruder and social alarm systems

The variety and the diversity of the apparatus within the scope of this document makes it difficult to define precise criteria for the evaluation of the immunity test results.

If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance by the manufacture and noted in the test report, based on the following criteria:

Electrostatic discharge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing that is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Radiated electromagnetic fields

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing which could be interpreted by associated equipment as a change, and no such

Flickering of indicators occurs at a field strength of 3 V/m.

For components of CCTV systems, where the picture is allowed at 10 V/m, providing.

(a) there is no permanent damage or change to EUT

(e.g. no corruption of memory or changes to programmable setting etc.)

(b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used; and

(c) there is no observable deterioration of the picture at 1 V/m.

Fast transient burst / slow high energy voltage surge

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing
That there is no residual is permissible, providing that there is no residual change in the EUT or any
change in outputs, which could be interpreted by associated equipment as a change.

Conducted RF immunity

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing
That there is no residual is permissible, providing that there is no residual change in the EUT or any
change in outputs, which could be interpreted by associated equipment as a change,
and no such flickering of indicators oeuvres at $U = 130 \text{ dB}\mu\text{V}$.

For component of CCTV systems, where the status is monitored by observing the TV picture,
then deterioration of the picture is allowed at $U = 140 \text{ dB}\mu\text{V}$, providing:

- (a) there is no permanent damage or change to the EUT
(e.g. no corruption of memory or changes to programmable settings etc.)
- (b) at $U = 130 \text{ dB}\mu\text{V}$, any deterioration of the picture is so minor that the system could
still be used; and
- (c) there in no observable deterioration of the picture at $U = 120 \text{ dB}\mu\text{V}$.

Voltage dip/interruption / Voltage variation

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the conditioning is permissible, providing that there is no residual
change in the EUT or any change in outputs, which could be interpreted by associated equipment
as a change. The EUT shall meet the acceptance criteria for the functional test, after the conditioning.

3.1 Electrostatic Discharge

Reference Standard

오류! 참조 원본을 찾을 수 없습니다.

Test Date

Jan. 18, 2016

Test Location

EMS-ESD: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	ESD SIMULATOR	ESS-2000	Noise Ken	ESS05X4620	06, 30, 2016
<input checked="" type="checkbox"/>	HCP	-	Noise Ken	-	-
<input checked="" type="checkbox"/>	VCP	-	Noise Ken	-	-

Test Conditions

Temperature: 19,1 °C
Relative Humidity: 36,6 %
Atmospheric Pressure: 99,9 kPa

Test Specifications

Discharge Factor: ≥ 1 s

Discharge Impedance: 330 ohm / 150 pF

Kind of Discharge: Air, Contact (direct and indirect)

Polarity: Positive and Negative

Number of Discharge: 10 at all locations for Air discharge
10 at all locations for Contact discharge

Discharge Voltage:	Contact <input type="checkbox"/> 2 kV <input type="checkbox"/> 4 kV <input checked="" type="checkbox"/> 6 kV <input type="checkbox"/> 8 kV <input type="checkbox"/> 15 kV	Air <input checked="" type="checkbox"/> 2 kV <input checked="" type="checkbox"/> 4 kV <input type="checkbox"/> 6 kV <input checked="" type="checkbox"/> 8 kV <input type="checkbox"/> 15 kV	HCP <input type="checkbox"/> 2 kV <input type="checkbox"/> 4 kV <input checked="" type="checkbox"/> 6 kV <input type="checkbox"/> 8 kV <input type="checkbox"/> 15 kV	VCP <input type="checkbox"/> 2 kV <input type="checkbox"/> 4 kV <input checked="" type="checkbox"/> 6 kV <input type="checkbox"/> 8 kV <input type="checkbox"/> 15 kV
--------------------	---	---	---	---

Notes: HCP: Horizontal coupling plane
VCP: Vertical coupling plane

Required Performance Criteria:


☒ Complied

Location of Discharge:

Air
Contact



Air

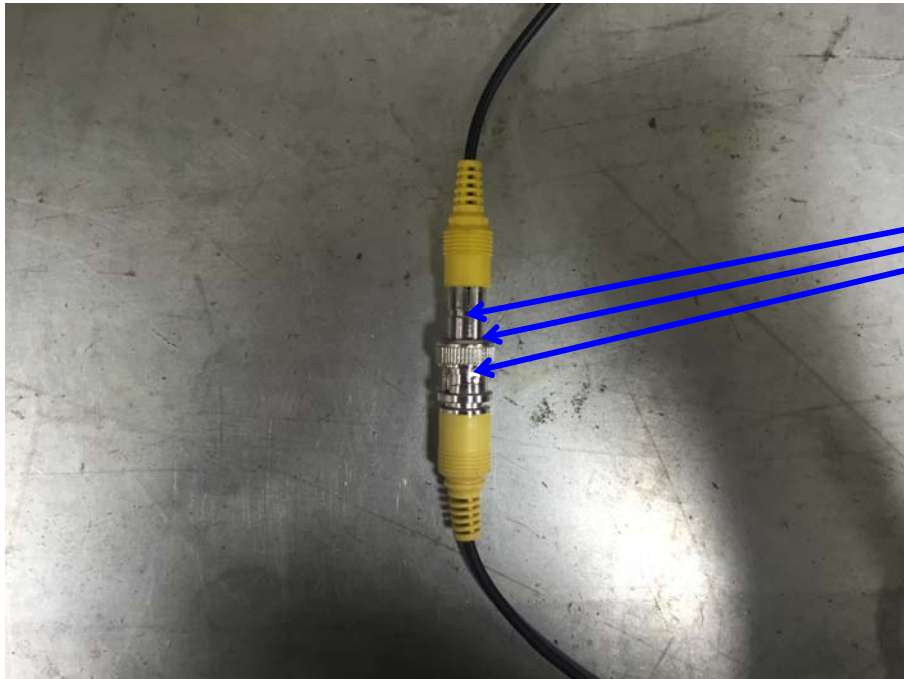

Contact

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0008
Page (22) of (58)

Test Data**Indirect Discharge**

No.	Test Point	Discharge Method	Performance	Remarks
			Observation	
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Performance	Remarks
			Observation	
1	Port	Air Discharge	Complied	-
2	BNC Port	Contact Discharge	Complied	-
3				-
4				-

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

No any function degraded during the test.

3.2 Radiated Electric Field Immunity

Reference Standard

오류! 참조 원본을 찾을 수 없습니다. +A2:2010

Test Date

Jan. 19, 2016

Test Location

EMS-RS: ☐ Semi Anchoic Chamber #1 ☒ Semi Anchoic Chamber #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input type="checkbox"/>	Integrated measurement system for EMS	IMS	R&S	100027	08, 13, 2016
<input type="checkbox"/>	Average Power Sensor	NRP-Z91	R&S	100784	08, 13, 2016
<input type="checkbox"/>	Power Amplifier	100W1000M1	AMPLIFIER RESEARCH	19510	08, 13, 2016
<input type="checkbox"/>	High Power Dual Directional Coupler	C3910	WERLATONE	30447	08, 13, 2016
<input type="checkbox"/>	Hybrid Log-Periodic Antenna	HLP-2603	EMC Automation (TDK)	100400	-
<input type="checkbox"/>	Semi Anchoic Chamber #1	-	KES	-	-
<input checked="" type="checkbox"/>	SIGNAL GENERATOR	SMB 100A	R&S	108252	08, 13, 2016
<input checked="" type="checkbox"/>	BROADBAND AMPLIFIER	BBA100	R&S	101239	08, 13, 2016
<input checked="" type="checkbox"/>	BROADBAND AMPLIFIER	100S1G6M1	AR	579931	08, 13, 2016
<input checked="" type="checkbox"/>	POWER METER	NRP2	R&S	103475	08, 13, 2016
<input checked="" type="checkbox"/>	AVG POWER SENSOR	NRP-Z91	R&S	102526	08, 13, 2016
<input checked="" type="checkbox"/>	AVG POWER SENSOR	NRP-Z91	R&S	102527	08, 13, 2016
<input checked="" type="checkbox"/>	Stacked Log.-Per.Antenna	STLP 9128 D	Schwarzbeck	9128D038	-
<input checked="" type="checkbox"/>	Semi Anchoic Chamber #2		SEMITEC	-	-

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0008

Page (24) of (58)

Test Conditions

Temperature: 19,7 °C
Relative Humidity: 38,2 %
Atmospheric Pressure: 100,6 kPa

Test Specifications

Antenna Polarization: Horizontal & vertical unless indicated otherwise

Antenna Distance: ☒ 3 m

Field Strength: ☐ 1 V/m ☐ 3 V/m
☒ 10 V/m

Frequency Range: ☐ 80 MHz to 1 GHz ☐ 1,4 GHz to 2,7 GHz
☒ 80 MHz to 2,7 GHz

Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: ☒ 1 % stepDwell Time: ☒ 1 s ☐ 3 s# of Sides Radiated: ☒ 4Required Performance Criteria: ☒ Complied**Test Data**

Side Exposed	Observation	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied – No degradation of function

Test Results

☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

No any function degraded during the test.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

3.3 Electrical Fast Transients/Bursts

Reference Standard

오류! 참조 원본을 찾을 수 없습니다.12

Test Date

Jan. 20, 2016

Test Location

EMS-EFT: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	Ultra Compact Simulator	UCS 500 N5	EM TEST	V0936105120	07, 14, 2016
<input checked="" type="checkbox"/>	Capacitive Coupling Clamp	HFK	EM TEST	070925	07, 14, 2016
<input checked="" type="checkbox"/>	MotorVariac	MV2616	EM TEST	V0936105123	07, 14, 2016
<input type="checkbox"/>	Transient Test System	TRA3000F-S-D-V	EMC PARTNER AG	1524	04, 01, 2016
<input type="checkbox"/>	MotorVariac	VAR-EXT1000	EMC PARTNER AG	1507	04, 01, 2016
<input type="checkbox"/>	Capacitive Coupling Clamp	CN-EFT1000	EMC PARTNER AG	1528	04, 01, 2016

Test Conditions

Temperature: 18,4 °C
Relative Humidity: 37,5 %
Atmospheric Pressure: 101,8 kPa

Test Specifications

Pulse Amplitude & Polarity: ☒ ± 1.0 kV ☐ ± 2.0 kV
(Power Lines) ☐ ± 4.0 kV

Pulse Amplitude & Polarity: ☐ ± 0.5 kV ☒ ± 1.0 kV
(Signal Lines) ☐ ± 2.0 kV

Burst Period: ☒ 300 ms ☐ 2 s

Repetition Rate: ☐ 5 kHz ☒ 100 kHz

Duration of Test Voltage: ☒ ≥ 1 min

Required Performance Criteria: ☒ Complied



Test Data

☐ Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	OBSERVATIONS	
	(+) Burst (kV)	(-) Burst (kV)

☒ Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	OBSERVATIONS	
	(+) Burst (kV)	(-) Burst (kV)
L - N	Complied	Complied

☒ Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	OBSERVATIONS	
	(+) Burst (kV)	(-) Burst (kV)
BNC	Complied	Complied

Note: "Blank" = Not performed

Observations:

A – No degradation of function

B – Distortion/Error of function (self-recoverable)

C – Loss of function

Test Results

☒ PASS Required Performance Criteria

☐ NOT PASS Required Performance Criteria

Remarks

No any function degraded during the test.

3.4 Surge Transients

Reference Standard

오류! 참조 원본을 찾을 수 없습니다.

Test Date

Jan. 20, 2016

Test Location

EMS-Surge: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	Ultra Compact Simulator	UCS 500 N5	EM TEST	V0936105120	07, 14, 2016
<input checked="" type="checkbox"/>	MotorVariac	MV2616	EM TEST	V0936105123	07, 14, 2016
<input type="checkbox"/>	CDN	CNV 504N	EM TEST	V0936105121	04, 01, 2016
<input type="checkbox"/>	Transient Test System	TRA3000F-S-D-V	EMC PARTNER AG	1524	04, 01, 2016
<input type="checkbox"/>	MotorVariac	VAR-EXT1000	EMC PARTNER AG	1507	04, 01, 2016

Test Conditions

Temperature: 18,4 °C
Relative Humidity: 37,5 %
Atmospheric Pressure: 101,8 kPa

Test Specifications

Power Lines

Source Impedance: 12 ohm for common mode and 2 ohm for differential mode

Surge Amplitude: Common Mode
☐ (0,5 / 1,0 / 2,0) kV
Differential Mode
☐ (0,5 / 1,0) kV

Number of Surges: ☐ 5 surges per angle

Angle: ☐ 0°, 90°, 180°, 270° (input a.c. power port)

Polarity: ☐ Positive & Negative

Repetition Rate: ☐ 1 surge per min ☐ 1 surge per 30 sec.

Required Performance Criteria: ☐ Complied

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:

KES-E1-16T0008

Page (28) of (58)

Signal Lines

Source Impedance: 42 ohm for common mode

Surge Amplitude: Common Mode
☒ (0,5 / 1,0) kVNumber of Surges: ☒ 5 SurgesPolarity: ☒ Positive & NegativeRepetition Rate: ☐ 1 surge per min ☒ 1 surge per 30 sec.Required Performance Criteria: ☐ Complied**Test Data****Power Lines**☐ Line to Line – Differential Mode

Mode of Application	OBSERVATIONS	
	(+) Surge (kV)	(-) Surge (kV)
L - N		

☐ Line to Earth – Common Mode

Mode of Application	OBSERVATIONS	
	(+) Surge (kV)	(-) Surge (kV)
L - PE		
N - PE		

Signal Lines☒ Line to Earth – Common Mode

Mode of Application	OBSERVATIONS	
	(+) Surge (kV)	(-) Surge (kV)
BNC	Complied	Complied

Note: "Blank" = Not performed

Observations:

A – No degradation of function

B – Distortion/Error of function (self-recoverable)

C – Loss of function

Test Results☒ PASS Required Performance Criteria☐ NOT PASS Required Performance Criteria**Remarks**

No any function degraded during the test.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

3.5 Conducted Disturbance

Reference Standard

오류! 참조 원본을 찾을 수 없습니다.

Test Date

Jan. 20, 2016

Test Location

EMS-CS: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	Continuous Wave Generator	CWS 500N1	EM TEST	V0936105119	09, 25, 2016
<input checked="" type="checkbox"/>	6dB Attenuator	ATT6	EM TEST	1208-34	08, 13, 2016
<input checked="" type="checkbox"/>	CDN	CDN-M2/M3N	EM TEST	0909-06	08, 13, 2016
<input type="checkbox"/>	CDN	CDN-T2-RJ11	EM TEST	0909-07	08, 13, 2016
<input type="checkbox"/>	CDN	CDN-T4	EM TEST	0909-08	08, 13, 2016
<input type="checkbox"/>	CDN	CDN-T8RJ45	EM TEST	0909-09	08, 13, 2016
<input type="checkbox"/>	CDN	CDN-AF2	EM TEST	0909-10	08, 13, 2016
<input type="checkbox"/>	CDN	CDN-AF4	EM TEST	0909-11	08, 13, 2016
<input checked="" type="checkbox"/>	EM Injection Clamp	EM 101	Liithi	35943	02, 11, 2016
<input type="checkbox"/>	Continuous Wave Generator	CWS 500 N1	EM TEST	P1251106910	04, 01, 2016
<input type="checkbox"/>	6 dB Attenuator	ATT6/75	EM TEST	1012-35	04, 01, 2016
<input type="checkbox"/>	CDN	CDN-M2/M3N	EM TEST	0213-10	04, 01, 2016
<input type="checkbox"/>	EM Injection Clamp	EM 101	Liithi	36152	04, 06, 2016

Test Conditions

Temperature: 18,4 °C
Relative Humidity: 37,5 %
Atmospheric Pressure: 101,8 kPa



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0008
Page (30) of (58)

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

**Test Specifications**

- Frequency range: ☒ 150 kHz to 80 MHz ☐ 10 kHz to 30 MHz
☐ 150 kHz to 230 MHz ☐ 10 kHz to 100 MHz
- Voltage Level: ☐ 1 Vrms ☐ 3 Vrms
☒ 10 Vrms
- Modulation: ☒ AM, 80 %, 1 kHz sine wave
☒ PM, 1 Hz (0,5 s ON : 0,5 s OFF)
- Frequency step: ☒ 1 % step
- Dwell Time: ☒ 1 s ☐ 3 s
- Required Performance Criteria: ☒ Complied

Test Data☐ Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observation

☒ Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observation
Input d.c. power port	CDN (<input checked="" type="checkbox"/> M2, <input type="checkbox"/> M3)	Complied

☒ Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observation
BNC	EM Injection Clamp	Complied

Notes: CDN = Coupling Decoupling Network
EMC = Electro Magnetic Clamp
"blank" = Not performed

Observations:

- A – No degradation of function
B – Distortion/Error of function (self-recoverable)
C – Loss of function

Test Results

- ☒ PASS Required Performance Criteria
☐ NOT PASS Required Performance Criteria

Remarks

No any function degraded during the test.



3.5 Power Frequency Magnetic Field Immunity

Reference Standard

오류! 참조 원본을 찾을 수 없습니다.

Test Date

N/A

Test Location

EMS-Magnetic: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input type="checkbox"/>	Magnetic coil	MS100	EM TEST	0809-10	08, 13, 2016
<input type="checkbox"/>	MotorVariac	MV2616	EM TEST	V0936105123	07, 14, 2016
<input type="checkbox"/>	Ultra Compact Simulator	UCS 500 N5	EM TEST	V0936105120	07, 14, 2016
<input type="checkbox"/>	Current Transformer	MC2630	EM TEST	0307-46	08, 13, 2016

Test Conditions

Temperature: °C
Relative Humidity: %
Atmospheric Pressure: kPa

Test Specifications

Field Strength: ☐ 1 A/m ☐ 3 A/m
☐ 30 A/m

Frequency: ☐ 50 Hz ☐ 60 Hz

Required Performance Criteria: ☐ A

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0008
Page (33) of (58)

Test Data

☐ Immersion method

Coil orientation	Observation
X - axis	
Y - axis	
Z - axis	

☐ Proximity method

Coil orientation	Observation

Note: "blank" = Not performed

Observations:

- A – No degradation of function
- B – Distortion/Error of function (self-recoverable)
- C – Loss of function

Test Results

- ☐ PASS Required Performance Criteria
- ☐ NOT PASS Required Performance Criteria

Remarks

NOT APPLICABLE

3.6 Voltage Dips and Short Interruptions

Reference Standard

오류! 참조 원본을 찾을 수 없습니다.

Test Date

N/A

Test Location

EMS-Voltage dip: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input type="checkbox"/>	Ultra Compact Simulator	UCS 500 N5	EM TEST	V0936105120	07, 14, 2016
<input type="checkbox"/>	Capacitive Coupling Clamp	HFK	EM TEST	070925	07, 14, 2016
<input type="checkbox"/>	MotorVariac	MV2616	EM TEST	V0936105123	07, 14, 2016
<input type="checkbox"/>	Transient Test System	TRA3000F-S-D-V	EMC PARTNER AG	1524	04, 01, 2016
<input type="checkbox"/>	MotorVariac	VAR-EXT1000	EMC PARTNER AG	1507	04, 01, 2016
<input type="checkbox"/>	Capacitive Coupling Clamp	CN-EFT1000	EMC PARTNER AG	1528	04, 01, 2016

Test Conditions

Temperature: °C
Relative Humidity: %
Atmospheric Pressure: kPa



Test Specifications & Observations/Remarks

Test Level	Duration [in period/ms (50 Hz)]	Criteria	Results
<input type="checkbox"/> 0 %Ut (100 % dip)	<input type="checkbox"/> 0,5 /10 <input type="checkbox"/> 1,0 /20 <input type="checkbox"/> 5,0 /100 <input type="checkbox"/> 10 /200 <input type="checkbox"/> 25 /500 <input type="checkbox"/> 50 /1 000 <input type="checkbox"/> 250 /5 000	— — — — — — —	— — — — — — —
<input type="checkbox"/> 40 %Ut (60 % dip)	<input type="checkbox"/> 0,5 /10 <input type="checkbox"/> 1,0 /20 <input type="checkbox"/> 5,0 /100 <input type="checkbox"/> 10 /200 <input type="checkbox"/> 25 /500 <input type="checkbox"/> 50 /1 000	— — — — — —	— — — — — —
<input type="checkbox"/> 70 %Ut (30 % dip)	<input type="checkbox"/> 0,5 /10 <input type="checkbox"/> 1,0 /20 <input type="checkbox"/> 5,0 /100 <input type="checkbox"/> 10 /200 <input type="checkbox"/> 25 /500 <input type="checkbox"/> 50 /1 000	— — — — — —	— — — — — —

Observations:

- A – No response observed from E.U.T
- B – Unit shuts down then automatically restarts when full voltage is restored.
- C – Unit shuts down then manually restarts when full voltage is restored or Loss of function.

Test Results

- ☐ PASS Required Performance Criteria
- ☐ NOT PASS Required Performance Criteria

Remarks

Refer to the results



APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

[HOT]

N/A



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0008
Page (37) of (58)

[NEUTRAL]

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0008
Page (38) of (58)

Conducted Emissions at Telecommunication Ports

[10 Mbps]

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0008
Page (39) of (58)

[100 Mbps]

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

**KES Co., Ltd.**

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0008
Page (40) of (58)


Radiated Electric Field Emissions(Below 1 GHz)

Frequency	Amplitude	ANT	ANT. Height	Correction Factor		Corrected Amplitude	Applicable Limit	Margin
[MHz]	[dB μ V]	Polar. (H/V)	[m]	ANT. [dB/m]	Cable [dB]	[dB μ V/m]	[dB μ V/m]	[dB]
35.82	19.56	V	1.00	11.08	1.50	32.14	40.00	7.86
519.78	18.87	V	1.00	17.54	6.74	43.15	47.00	3.85
594.50	15.90	V	1.00	19.18	7.35	42.43	47.00	4.57
669.23	12.80	V	1.00	19.58	7.82	40.20	47.00	6.80
742.95	14.17	V	1.00	20.17	8.41	42.75	47.00	4.25
966.05	9.10	H	1.91	23.76	9.94	42.80	47.00	4.20

* H : Horizontal, V : Vertical


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Emissions(Above 1 GHz)

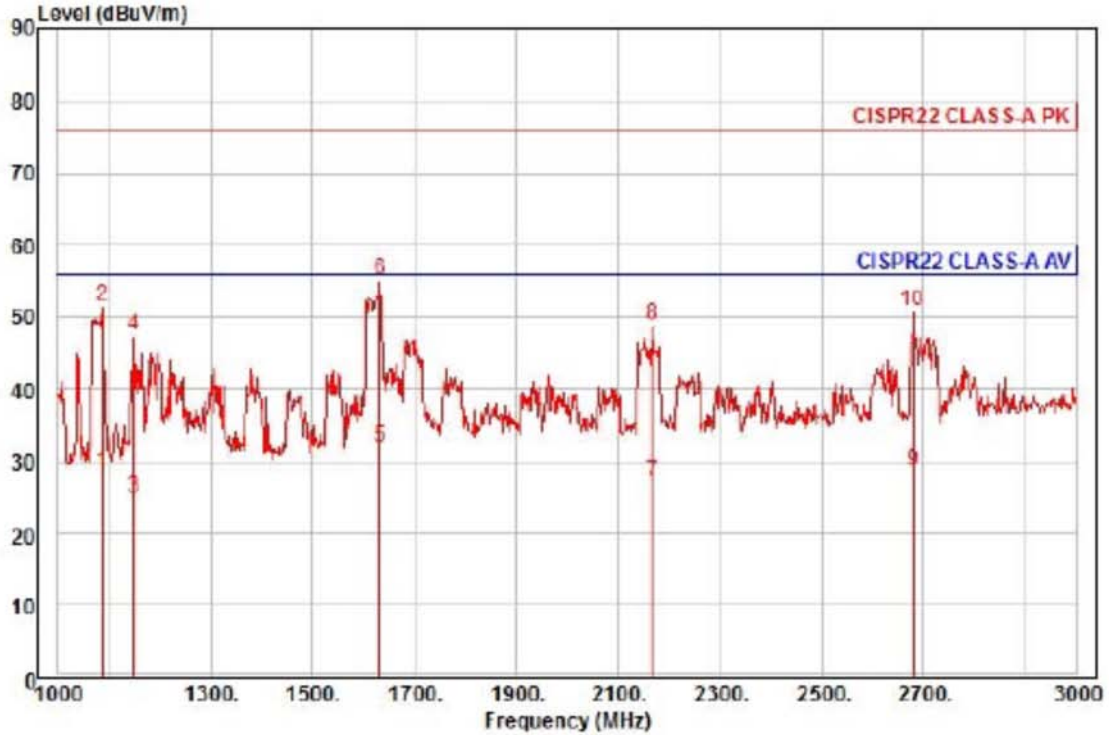


Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project : ANALOG CAMERA
Model : SCD-6023RP
Mode : 12 V (dc)
Memo : (1 - 3) GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1088.00	37.99	24.26	6.30	40.08	339	56.00	-27.53	horizontal	Average
2	1088.00	60.93	24.26	6.30	40.08	339	76.00	-24.59	horizontal	Peak
3	1148.00	34.01	24.50	6.47	40.05	319	56.00	-31.07	horizontal	Average
4	1148.00	56.47	24.50	6.47	40.05	319	76.00	-28.61	horizontal	Peak
5 av	1632.00	37.41	26.42	7.86	39.81	299	56.00	-24.12	horizontal	Average
6 pp	1632.00	60.78	26.42	7.86	39.81	299	76.00	-20.75	horizontal	Peak
7	2168.00	29.30	28.29	9.39	39.73	42	56.00	-28.75	horizontal	Average
8	2168.00	50.78	28.29	9.39	39.73	42	76.00	-27.27	horizontal	Peak
9	2680.00	28.44	29.55	10.81	40.02	321	56.00	-27.22	horizontal	Average
10	2680.00	50.49	29.55	10.81	40.02	321	76.00	-25.17	horizontal	Peak

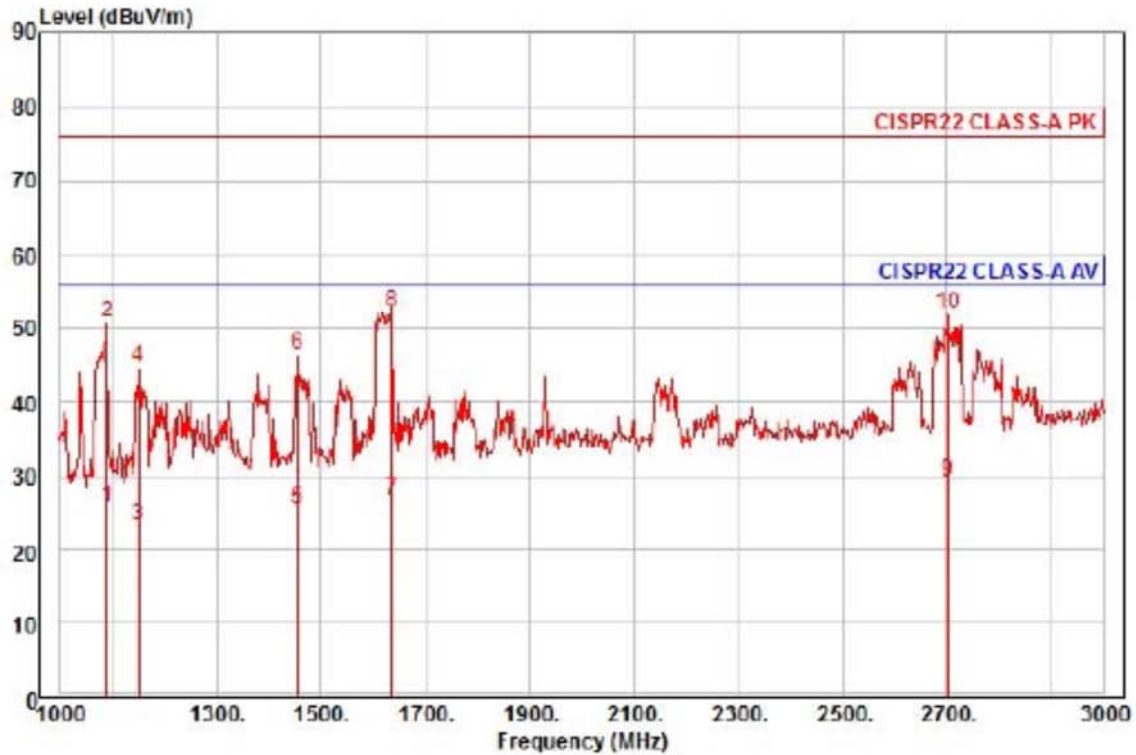

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project : ANALOG CAMERA
Model : SCD-6023RP
Mode : 12 V (dc)
Memo : (1 - 3) GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1090.00	35.27	24.27	6.31	40.08	357	56.00	-30.23	vertical	Average
2	1090.00	60.25	24.27	6.31	40.08	357	76.00	-25.25	vertical	Peak
3	1150.00	32.45	24.51	6.48	40.05	360	56.00	-32.61	vertical	Average
4	1150.00	53.79	24.51	6.48	40.05	360	76.00	-31.27	vertical	Peak
5	1454.00	32.37	25.71	7.35	39.90	28	56.00	-30.47	vertical	Average
6	1454.00	53.28	25.71	7.35	39.90	28	76.00	-29.56	vertical	Peak
7	1636.00	32.15	26.43	7.88	39.81	334	56.00	-29.35	vertical	Average
8 pp	1636.00	57.74	26.43	7.88	39.81	334	76.00	-23.76	vertical	Peak
9 av	2702.00	28.80	29.60	10.87	40.04	346	56.00	-26.77	vertical	Average
10	2702.00	51.47	29.60	10.87	40.04	346	76.00	-24.10	vertical	Peak

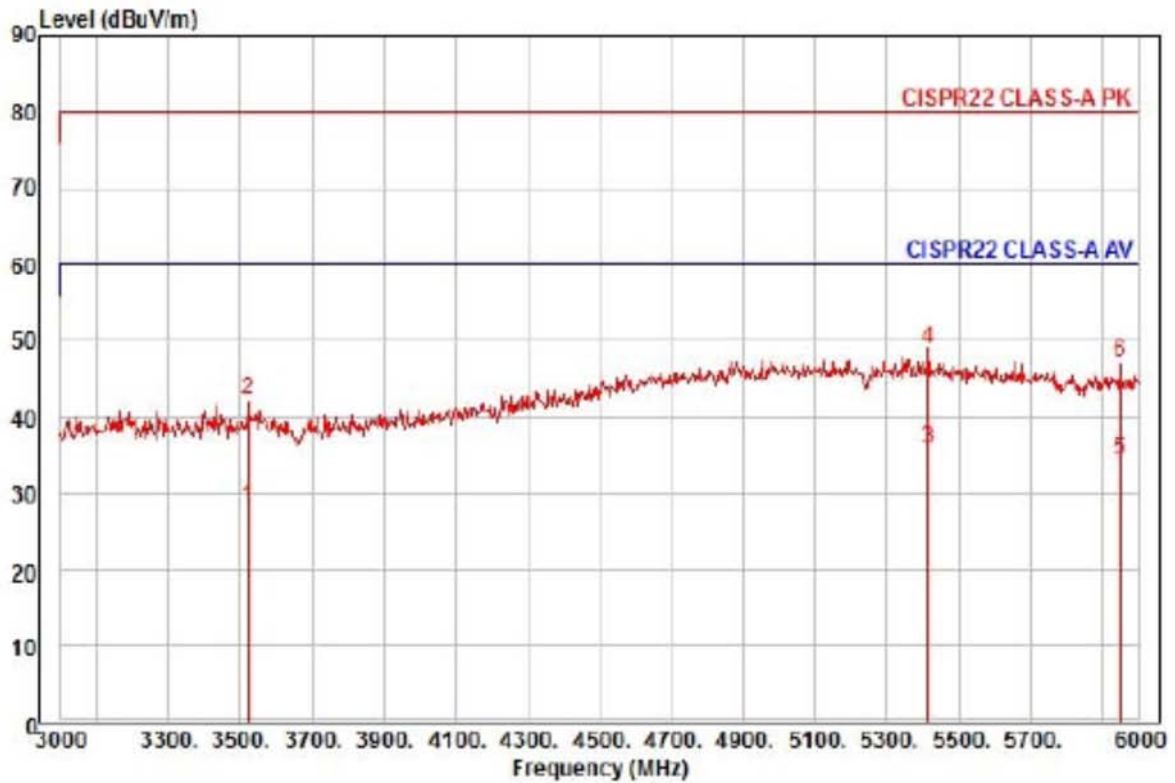

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project : ANALOG CAMERA
Model : SCD-6023RP
Mode :
Memo : (3 - 6) GHz


	Freq	Read Level	Ant Factor	Cable Loss	Preamplifier Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3522.00	24.96	31.21	12.39	40.31	346	60.00	-31.75	horizontal	Average
2	3522.00	38.97	31.21	12.39	40.31	346	80.00	-37.74	horizontal	Peak
3 pp	5415.00	23.54	36.88	15.63	40.35	184	60.00	-24.30	horizontal	Average
4 pk	5415.00	36.57	36.88	15.63	40.35	184	80.00	-31.27	horizontal	Peak
5	5949.00	22.32	35.80	16.60	40.28	114	60.00	-25.56	horizontal	Average
6	5949.00	35.06	35.80	16.60	40.28	114	80.00	-32.82	horizontal	Peak



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0008
Page (44) of (58)

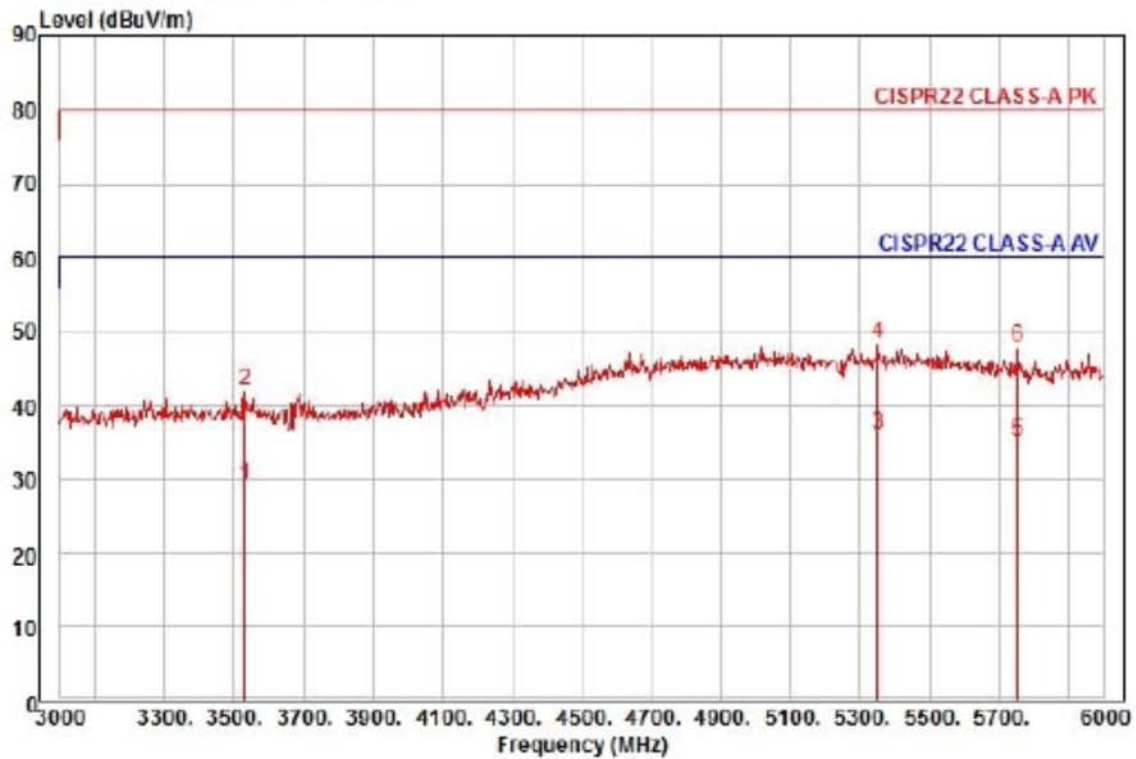

Site : chamber
Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
: RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
Project : ANALOG CAMERA
Model : SCD-6023RP
Mode :
Memo : (3 - 6) GHz

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3531.00	25.90	31.22	12.41	40.32	79	60.00	-30.79	vertical	Average
2	3531.00	38.56	31.22	12.41	40.32	79	80.00	-38.13	vertical	Peak
3 pp	5352.00	23.80	37.01	15.51	40.36	111	60.00	-24.04	vertical	Average
4 pk	5352.00	36.26	37.01	15.51	40.36	111	80.00	-31.58	vertical	Peak
5	5754.00	22.84	36.20	16.24	40.30	6	60.00	-25.02	vertical	Average
6	5754.00	35.70	36.20	16.24	40.30	6	80.00	-32.16	vertical	Peak

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0008
Page (45) of (58)

Harmonic Current Emissions and Voltage Fluctuations and Flicker

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0008
Page (46) of (58)

Test Setup Photos and Configuration

Conducted Voltage Emissions

N/A

N/A



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Emissions(Below 1 GHz)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Emissions(Above 1 GHz)

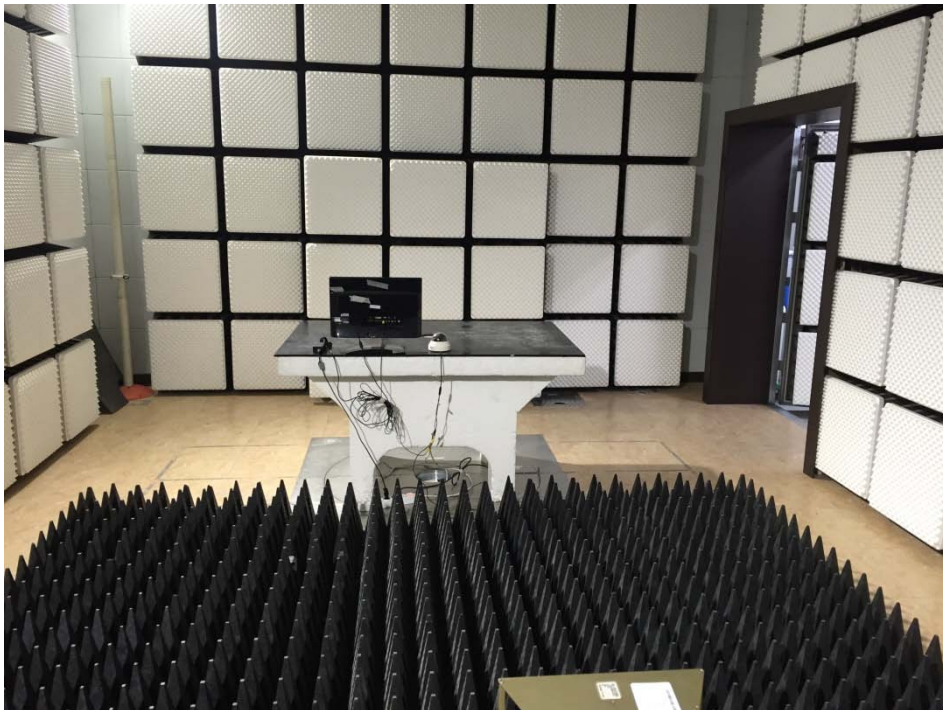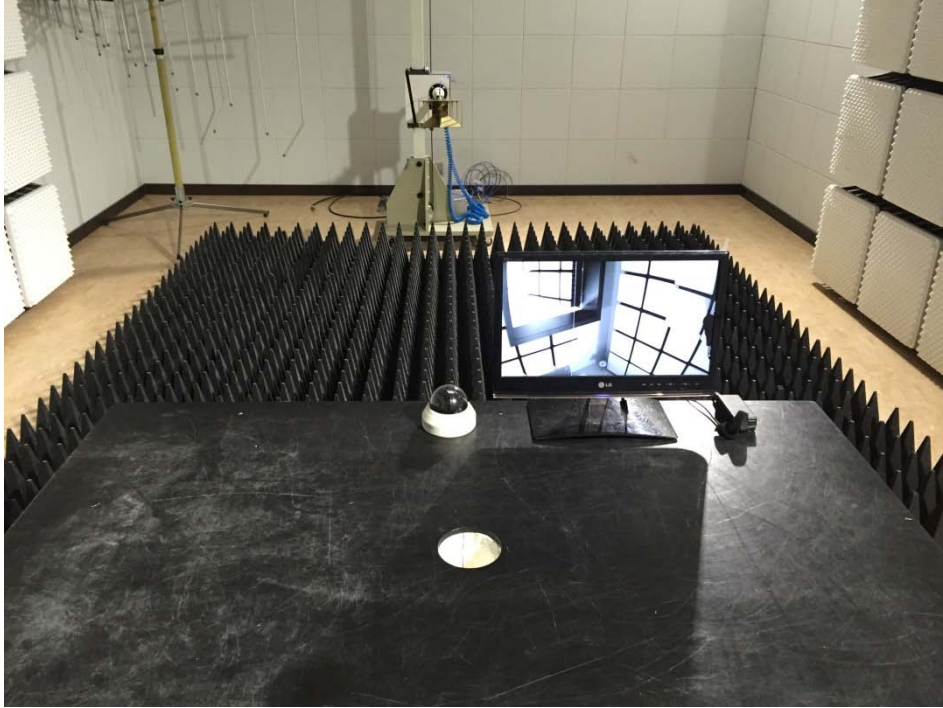

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0008
Page (49) of (58)

Harmonic Current Emissions and Voltage Fluctuations and Flicker


N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Electrostatic Discharge



Radiated Electric Field Immunity

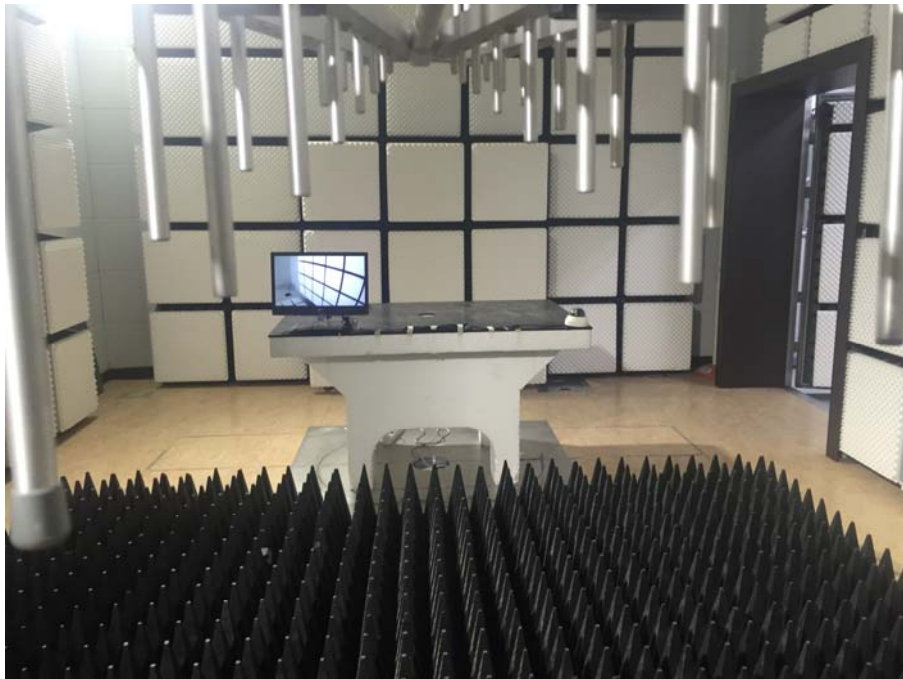

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Electrical Fast Transients/Bursts



Surge Transients



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Conducted Disturbance



Power Frequency Magnetic Field Immunity

N/A



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0008
Page (53) of (58)

Voltage Dips and Short Interruptions

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

E.U.T External Photographs

(Top)




(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


E.U.T Internal Photographs

(Internal View)

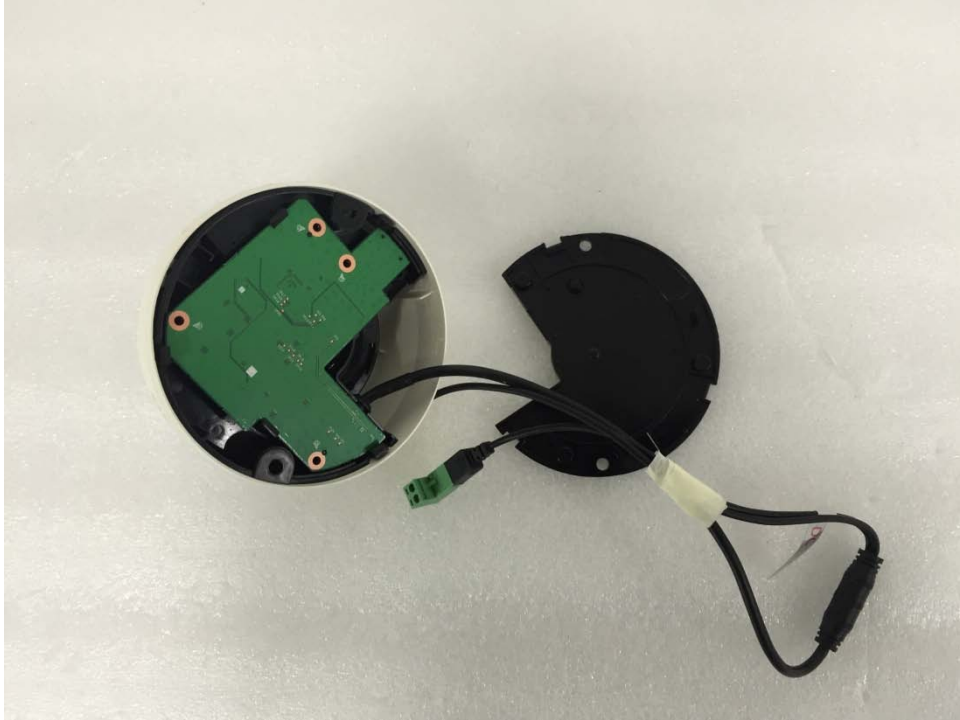


Main Board EUT Internal View – Main Board

(Top)

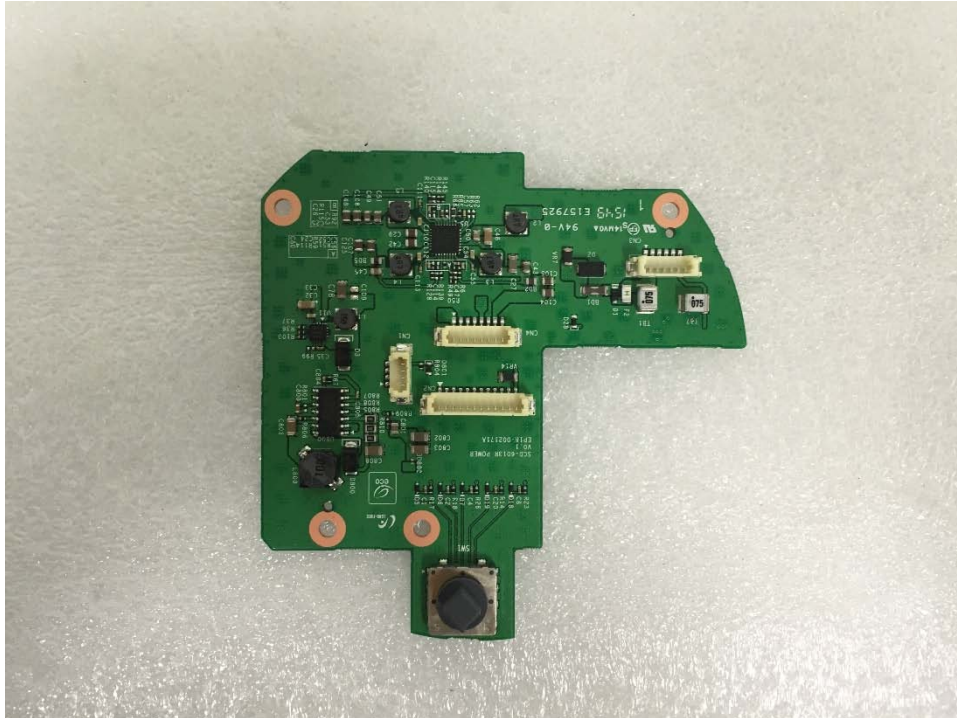

(Bottom)

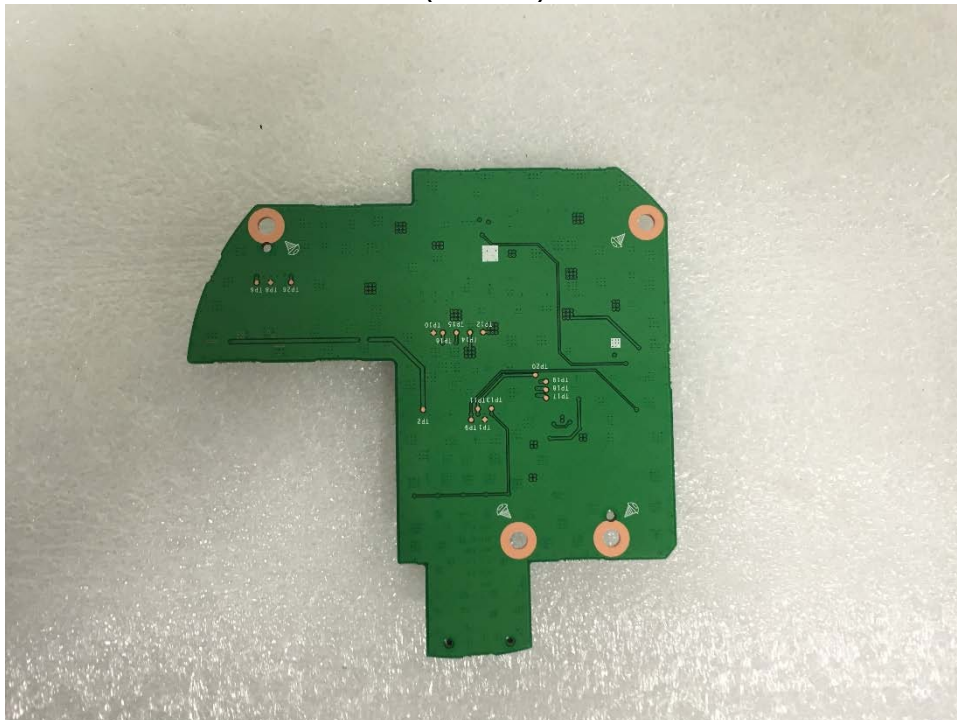

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Main Board EUT Internal View – Camera Board

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Main Board EUT Internal View – IR Board

(Top)




(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Label and Location

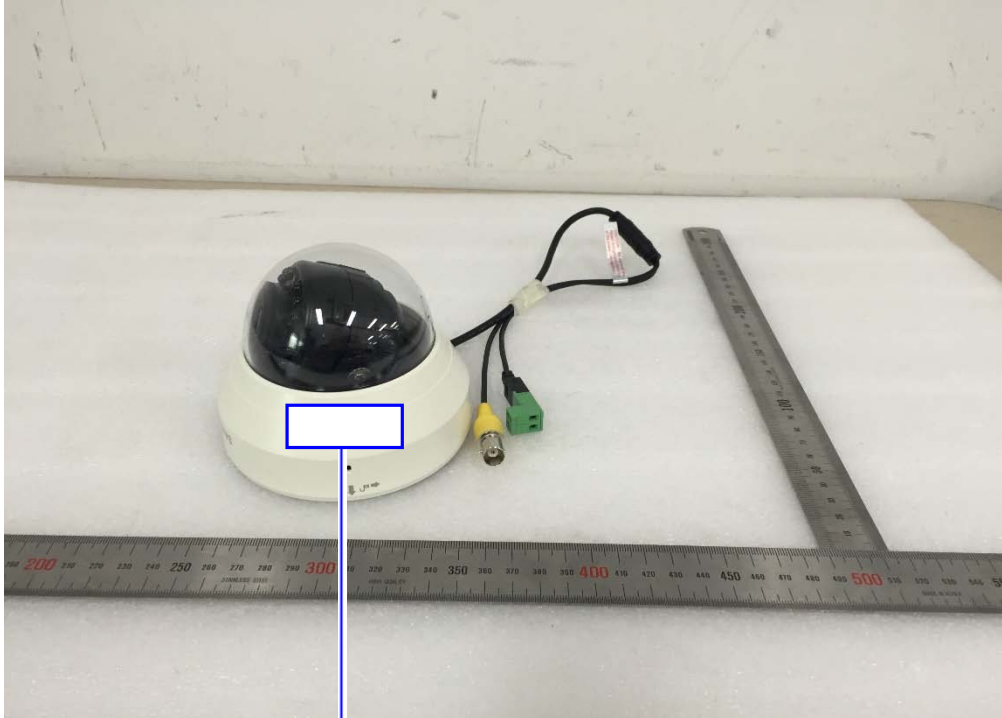

ANALOG CAMERA

Model No : SCD-6023RP

Manufacturer : Tianjin Samsung Techwin Opto-Electronic Co., Ltd.

Made in of China

