



PARVIS SMA HY

The same single column philosophy where the TX column and the RX column houses 2 or 3 dual beams, depending on column height, which allows a site of any size or shape to be protected. All the features and functions are the same as those in the **SANDOR SMA HY**, range of beams; therefore they are compatible with the 2 or 3 beam pairs in TERMINAL mode.

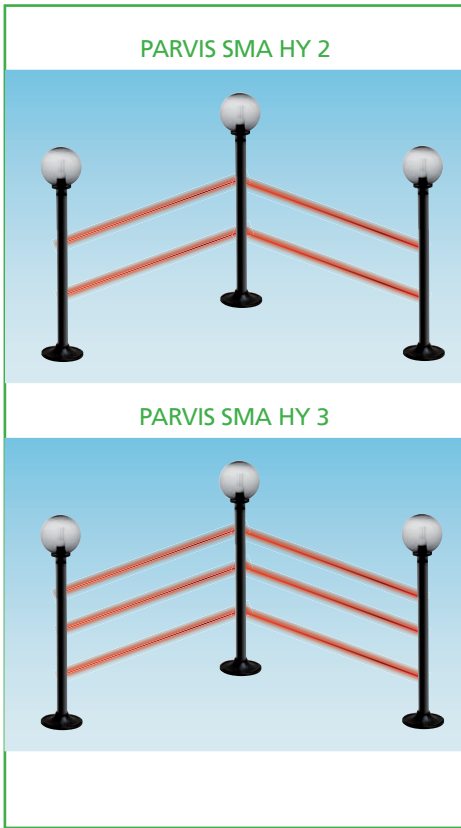

Adjustment Angles

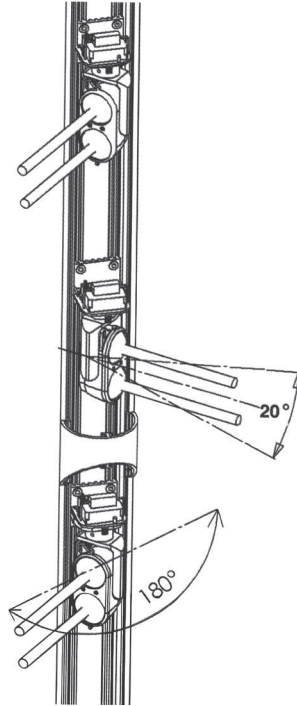

FEATURES

- Outdoor Range 100 m
- Low Battery indication
- Environmental Module
- Crawl Detect
- OR – Random or First Two Beams AND
- Beam 2-3 selector
- Adjustable Response Time
- TX tamper relayed to the RX
- 230 Vac Power Supply
- Rechargeable Battery
- Heater Power supply



POB 30
NEW WIRING
POTHOLE



3 MONTH OPERATION IN THE EVENT
OF 230 VAC POWER OUTAGE