


Installation Guide

Power adapter


Package Contents; 4G LTE Router, Power adapter, QIG□ UTP Cable, 4G Antenna

Connection

Connector and LED Explanation



There are 3 LED(POW/4G/2.4G) on PCB Board



Function	Description
Power Status	on: Successfully to connect with power off: Fail to connect with power
3G/4G Status	on: 3G/4G working flicker: Transmitting data off: 3G/4G not work
Wi-Fi Status	on: Wi-Fi working flicker: Transmitting data off: Wi-Fi not work
-	Power Status 3G/4G Status

Equipment configuration

Login WEB page


1. set PC ip: 192,168,1,49, default gateway P: 192,168,1,88, then connecting PC port to any LAN of LTE CPE with RJ45 UTP, Waiting for the connection to succeed, the LTE Router's LED is always on.




2. Open IE Browser, Input address: http://192.168.1.88/,entry the user login page, Enter the default username and password admin/admin, which is printed on the bottom of LTE Router:



3. if LTE Wi-Fi Router successful receive 4G signal, you can check status ->overview Application Case Flow Switch at top right corner (This is a button to control on/off 4G internet flow)



2. more than 1 pcs IP camera

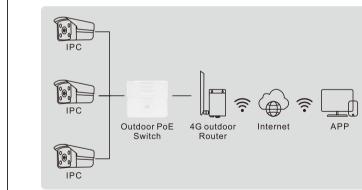

Warranty Card

Username	
Address	
Telephone No.	
Purchase Shop	
Purchase Address	
Product Model No.	
Purchase Time	
Serial No.	_
Dealer Signature	

- product of the same model. • If the product defects within the three-year warranty period, we will provide the
- services guaranteed as part of the limited warranty. • Any other defects that are not caused by workmanship or product quality, such as





4. you can go to Wi-Fi Setting-> Wi-Fi configuration to modify Wi-Fi SSID and Password for share Wi-Fi to end users access

WiFi signal strength

Wesk Medium Forced Automatic

WPS connection Easteled

->4G status show 4G access information:

card ISP to get APN parameters)

if 4G status has access information, but still not have internet, please click

■ Version V1.0-202001101135 👛 CPU

If in 4G status page not show 4G access information, please go to Network

Configuration -> APN Settings to set APN parameters (you can call your

1m25s

Online users

863022040308850 ICCID

-53dBm Current month flow

www.wireless-tek.com

• If the product defects within three months after purchase, we will provide you a new

- professional maintenance service. Proof of purchase and a complete product serial number are required to receive any
- natural disaster, water damage, extreme thermal or environmental conditions. sticker damaged, warranty card losing will disqualify the product from limited warranty.