DATASHEET

Danalock V3 for Euro profile cylinders

The danalock V3 evolution is based on the feedback from devoted customers and the latest development in data security and smart home technology.

Smaller, stronger and easier to install the Danalock V3 takes the lead on the smartlock market and is setting new standards for years to come.

www.saltosystems.com

TECHNICAL SPECIFICATION: DANALOCK V3 MOTORIZED LOCK (D0xE)







TECHNICAL DATA:

Product dimensions: (Ø x D):	59 x 59mm
Weight (Batteries included):	195 Gms
	152,0 x 27,0 mm
Material:	Anodized Alumiunm /ABS.
Colour available:	Silver.
Power source:	4 x CR123A1
Battery life:	9,000 openings or 1 year
Environmental conditions:	0 °C / +60 °C.
IP class:	Not suitable for outdoor use.
Certifications:	CE, FCC/IC

Cylinder compatibility:

European cylinder models: SALTO DCE1 cylinders SALTO DCE2 cylinders

ACCESS CONTROL FEATURES:

Users & doors:

Maximum number of users per door:	Unlimited
Maximum number of doors per system:	Unlimited
Access levels:	Unlimited

Calendars & time zones:

Maximum events on lock audit:

Calendars in system:	_
Timetables:	Unlimited
Time periods:	_


Events:

	Events are automatically sent to the Danalock cloud database.
ID TECHNOLOGIES:	
Bluetooth Smart BLE:	•
Smartphone OS compatibility:	IOS 9 or superior
	Android 6.0 or superior

WIRELESS TECHNOLOGIES

WIRELESS TECHNOLOGIES:		
Zigbee:	•	
Z-Wave regional compatibility:	EU	
	US	
	AUS-NZ	
	Japan	

TECHNICAL DRAWING:

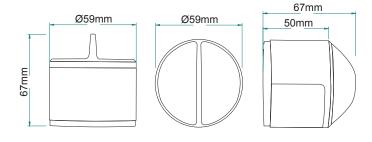

PLATFORMS:

Host-based access control:

Smile - Selfprogrammable	_
ROM:	_
SVN data-on-card:	_
SALTO BLUEnet:	_
SALLIS:	_

Cloud-based locking solution:

SALTO KS:	_
Danalock platform:	•

INTEGRATIONS:

Hardware integration:

Zigbee:	Samsung SmartThings
Z-Wave:	Vera Smarter Home control
	Amazon Echo
	Nest
	IFTTT
	Logitech Harmony

Cloud integration:

Airbnb:

