



REF. 9408. 4,3" DUOX VEO-XS MONITOR





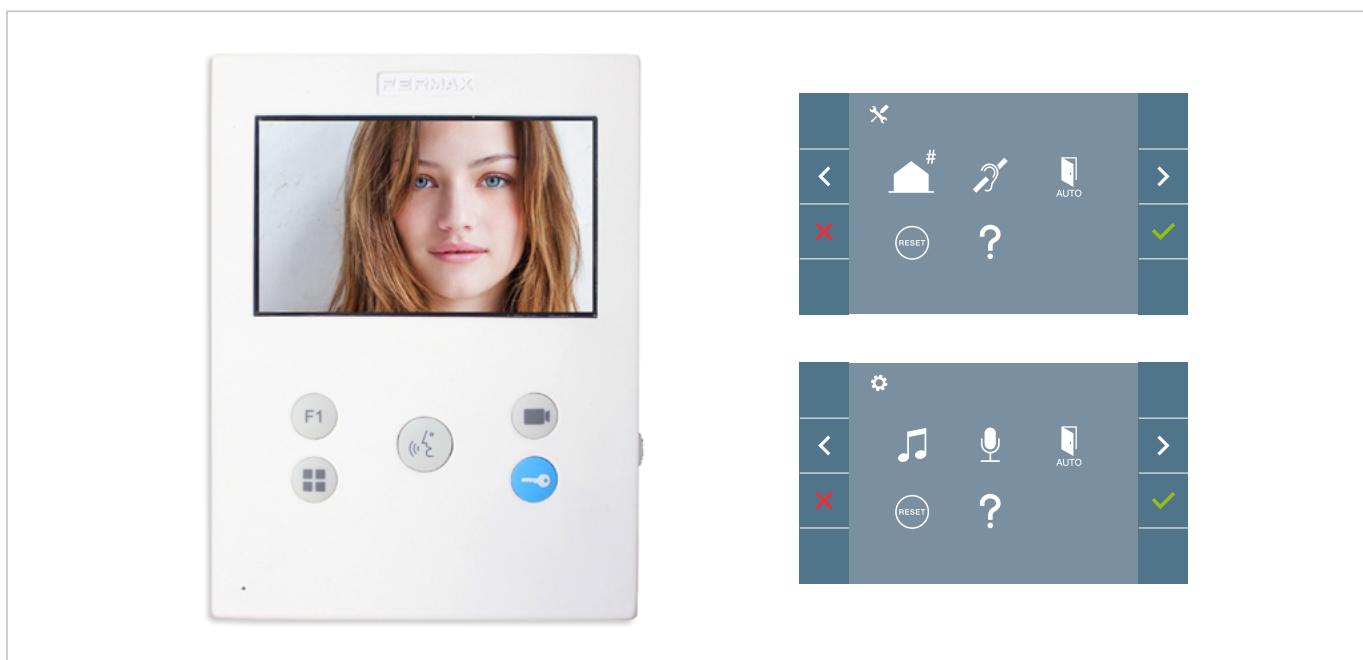


FUNCTIONS

- Surface mounted monitor.
- Panoramic 4,3" color screen (16:9 format).
- 5 mechanical pushbuttons with pleasant touch for basic functions.
- Hands-free audio communication (Press-to-talk mode also configurable).
- Door opening.
- Guard unit call.
- Call volume control adjustable throughout menu or sliding wheel. The lowest position corresponds to the minimum call volume level.
- Do-not-disturb (DND) option configurable throughout the menu. The call can be reactivated by menu or simply by moving the sliding wheel.
- Doormatic (Professional studio/office function) with configurable time (until 12 hours).
- Configurable ring tones ((Total 5: 2 long tones (16 s.) and 3 short ones).
- Door bell.
- Monitor address quickly and easily programmable on the monitor screen or via the entry panel. Also possible to program the address without entering the apartment, throughout the door bell.
- Audio volume regulation. Adjustable throughout menu or sliding wheel.
- Settings configuration via screen menu (OSD).
- Adjustment of brightness, contrast and color.
- F1 and F2 auxiliary functions.

 Available version of the monitor including magnetic loop (ref. FFR09408). It includes a magnetic loop that interacts with the aid devices used by people with audition problems.

OPERATIONAL DESCRIPTION

Pushbuttons

-  Activates/Deactivates the audio communication.
-  Menu: adjustments and configuration. Digital menu for internal parameter settings and configuration (when the monitor has already been programmed).
-  In conversation, press to open the door.
In standby, call to guard unit (if applicable).
-  Auxiliary function (negative output "-" / sending command)
It is initially configured, by default, as an output and sends a negative "-".
-  Auto-on button. Connection with the Block's or General Entrance's camera (depending on availability in the installation).

LEDs information:

There are three leds that describe the status of the monitor:

- Red: do not disturb (DND).
- Blue: on audio conversation.
- Green: doormatic

ACCESSORIES

Ref. 9407. DUOX VEOXS MONITOR CONNECTOR

Ref. 3389. UNIVERSAL FRAME LARGE

Ref. 3388. UNIVERSAL FRAME

MECHANICAL FEATURES

APPEARANCE


Color: White.

Material: ABS with UV protection.

DIMENSIONS

165 x 125 x 21 mm

Surface mounted

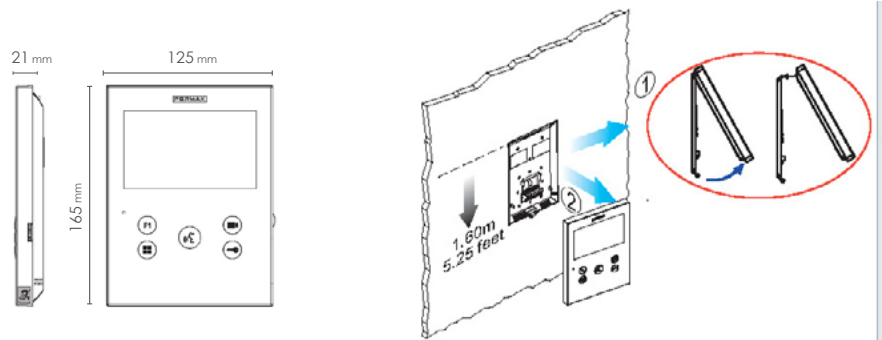

TECHNICAL FEATURES

Power supply:

- 18 Vdc

Maximum estimated consumption:

- Standby: 30 mA
- Audio + Video (conversation): 310 mA
- Audio + Video with activated magnetic loop: 850 mA

Operating temperature: [-5°, +40°C] / [23°, 104°F]

Humidity: [0%, 90%]

OSD Screen:

- DUOX digital video.
- Size 4,3"
- Format 16:9

- Resolution:

- * Hor: 480 Line TV
- * Ver: 272 Line TV

Audio features:

- DUOX digital audio.
- 1 x 1W.
- Audio level adjustable during the operation.
- Totally hands-free conversation.
- Conversation privacy.
- Selectable ringtones.

Technology: DUOX

- 2 non-polarized wires.

TECHNICAL SPECIFICATIONS

CONNECTIONS

Bin, Bin: data, audio and video input.

Bou, Bout: data, audio and video output (cascade connection).

T, -: Door bell. Call button for Residential Door (P1).

A+, -: Call extension connection (ref. 2040) / Light and bell activator (ref. 2438).

F1: additional functions.

JP1: This monitor includes the DUOX line adaptor function. By means of a jumper included in the monitor, the installer can get by without the DUOX Line adaptor ref. 3255. The jumper can be configured in position 'A', 'C' or OFF. By default the DUOX line adaptor function is deactivated, being the jumper in position "OFF".

