




**NGC-7326FS**

**2 MP Network IR Water-proof  
Bullet Camera**

# NGC-7326VS


## 2 MP Network IR Water-proof Bullet Camera

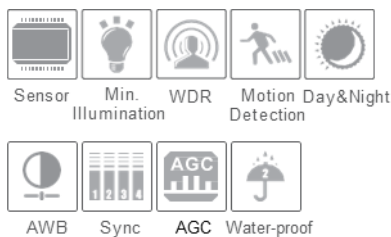

### Features

- 2MP ( 1920 × 1080 ) coding
- Max. resolution: 1920 × 1080
- ICR auto switch, true day/ night
- 70 ~ 100m IR night view distance
- Third generation of dot matrix LED IR lights, small size, efficient heat dissipation, long lifespan
- 3D DNR, digital WDR
- ROI coding
- Support smart phone, iPad, remote monitoring
- Support P2P
- IP66 ingress protection
- Support three streams

### Dimensions

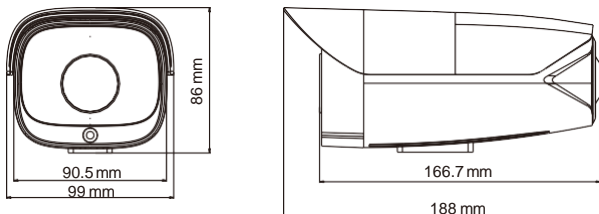

### Specifications

Model	NGC-7326VS
<b>Specifications</b>	
<b>Camera</b>	
Image Sensor	1 / 2.8 "CMOS
Image Size	1920 × 1080
Electronic Shutter	1 / 25 s ~ 1 / 100000 s
Iris Type	Fixed Iris
Min. Illumination	Color : 0.002 lux @F1.2,AGC ON; B / W : 0.0002 lux @F1.2,AGCON
Lens	3.6 mm @F1.6, horizontal field of view: 85.8°
Lens Mount	M12
Day & Night	ICR
Wide Dynamic Range	Digital WDR
Digital NR	3D DNR
<b>Image</b>	
Video Compression	H.264 / MJPEG
H.264 Compression Standard	Baseline Profile / Main Profile / HighProfile
Resolution	1080P ( 1920×1080 ), 720P ( 1280×720 ), D1, CIF, 480×240
Main Stream	60Hz : 1080P( 1 ~ 30fps ) / 720P( 1 ~ 30fps ) 50Hz : 1080P( 1 ~ 25fps ) / 720P( 1 ~ 25fps )
Bit Rate	128Kbps ~ 6Mbps
Bit Rate Type	VBR / CBR
Quality	Five levels under VBR; Freely adjustable under CBR
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR,etc. adjustable through client software or web browser
ROI	Each ROI to be configured separately
<b>Interfaces</b>	
Network	RJ45
<b>Functions</b>	
Remote Monitoring	IE browsing,CMS remote control
Online Connection	Support simultaneous monitoring for up to 3 users; Support multi-stream real time transmission
Protocol	TCP / IP, UDP, DHCP, NTP, RTSP, DDNS, SMTP, FTP
Storage	Network remote storage
Smart Alarm	Motion alarm
IR Distance	70 ~ 100 m
Ingress Protection	IP66
<b>Others</b>	
Power Supply	DC12V
Power Consumption	< 3W
IR Consumption ON	< 7W
Operating Environment	- 20 °C ~ 50 °C, 10 % ~ 90 % relative humidity
Dimensions ( mm )	99 × 188 × 86 ( W × D × H )
Weight ( net )	514g
Installation	Wall mounting

### Available Accessories



NAV-BRACK1