




# **NGC-7326VAZ**

**2 MP Network IR Water-proof  
Bullet Camera**

---

# NGC-7326VAZ


## 2 MP Network IR Water-proof Bullet Camera

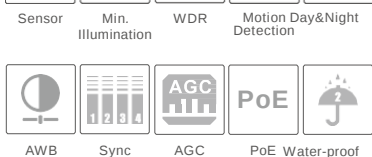

### Features

- 1080P ( 1920 × 1080 ) full real time coding
- Max. resolution: 1920 × 1080
- ICR auto switch, true day / night
- 30 ~ 50m IR night view distance
- 3D DNR, physical WDR
- Smart analysis including object removal, line crossing detection and intrusion detection, etc.
- ROI coding
- Support CVBS video output and two-way audio
- PoE power supply
- Support hardware reset
- Support smart phone, iPad, remote monitoring
- Support P2P
- IP66 ingress protection
- Support three streams

### Dimensions

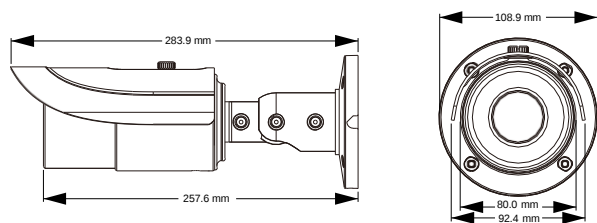

### Available Accessories



NAV-DJD



NAV-DJD+NAV-SAS



NAV-DJD+NAV-SAC

### Specifications

| Model                      | NGC-7326VAZ                                                                                                                      |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| <b>Specifications</b>      |                                                                                                                                  |
| <b>Camera</b>              |                                                                                                                                  |
| Image Sensor               | 1 / 2.7" CMOS                                                                                                                    |
| Image Size                 | 1920 × 1080                                                                                                                      |
| Electronic Shutter         | 1 / 25 s ~ 1 / 100000 s                                                                                                          |
| Iris Type                  | Fixed Iris                                                                                                                       |
| Min. Illumination          | 0.05 lux@F1.2, AGC ON; 0 lux with IR                                                                                             |
| Lens                       | 2.8 ~ 12 mm @F1.4, horizontal field of view: 109.8° ~ 38.5°                                                                      |
| Lens Mount                 | Φ14                                                                                                                              |
| Day & Night                | ICR                                                                                                                              |
| Wide Dynamic Range         | 120dB                                                                                                                            |
| Digital NR                 | 3D DNR                                                                                                                           |
| Angle Adjustment           | Any angle                                                                                                                        |
| <b>Image</b>               |                                                                                                                                  |
| Video Compression          | H.265 / H.264 / MJPEG                                                                                                            |
| H.265 Compression Standard | Main Profile @Level 4.1 High Tier                                                                                                |
| Resolution                 | 1080P ( 1920×1080 ), 720P ( 1280×720 ), D1, CIF, 480×240                                                                         |
| Main Stream                | 60Hz : 1080P( 1 ~ 30fps ) / 720P( 1 ~ 30fps )<br>50Hz : 1080P( 1 ~ 25fps ) / 720P( 1 ~ 25fps )                                   |
| Bit Rate                   | 128 Kbps ~ 6 Mbps                                                                                                                |
| Bit Rate Type              | VBR / CBR                                                                                                                        |
| Quality                    | Five levels under VBR; Freely adjustable under CBR                                                                               |
| Image Settings             | ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser |
| ROI                        | Each ROI to be configured separately                                                                                             |
| <b>Interfaces</b>          |                                                                                                                                  |
| Network                    | RJ45                                                                                                                             |
| Audio                      | MIC IN × 1, MIC OUT × 1                                                                                                          |
| Video Output               | CVBS video output ( BNC × 1 )                                                                                                    |
| Storage Card               | Up to 128GB                                                                                                                      |
| RS485                      | Yes                                                                                                                              |
| Alarm Input                | 1 CH                                                                                                                             |
| Alarm Output               | 1 CH                                                                                                                             |
| <b>Functions</b>           |                                                                                                                                  |
| Remote Monitoring          | IE browsing, CMS remote control                                                                                                  |
| Online Connection          | Support simultaneous monitoring for up to 4 users;<br>Support multi-stream real time transmission                                |
| Network Protocol           | TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP                                                                           |
| Interface Protocol         | ONVIF, GB-T/28181-2011                                                                                                           |
| Storage                    | Local storage, network remote storage                                                                                            |
| Smart Alarm                | Motion alarm, sensor alarm                                                                                                       |
| Smart Analysis             | Object removal detection, line crossing detection and intrusion detection, etc.                                                  |
| PTZ                        | RS485 × 1                                                                                                                        |
| PoE                        | Yes                                                                                                                              |
| IR Distance                | 30 ~ 50 m                                                                                                                        |
| Ingress Protection         | IP66                                                                                                                             |
| <b>Others</b>              |                                                                                                                                  |
| Power Supply               | DC12V / PoE                                                                                                                      |
| Power Consumption          | < 2W                                                                                                                             |
| IR Consumption ON          | < 6W                                                                                                                             |
| Operating Environment      | - 20 °C ~ 50 °C, 10 % ~ 90 % relative humidity                                                                                   |
| Dimensions ( mm )          | Φ 109 × 284                                                                                                                      |
| Weight ( net )             | 1110g                                                                                                                            |
| Installation               | Wall mounting, pendent mounting                                                                                                  |