


# NGC-7282F

8 MP AI Dome Network Camera



- Smart H.265/H.264 coding
- Max.resolution: 8MP ( 3840 × 2160 )
- ICR auto switch, true day / night vision
- 3D DNR, true WDR, HLC, BLC and ROI coding
- 20~30m IR night view distance
- 1CH audio input; 1CH built-in MIC
- 1CH alarm input; 1CH alarm output
- Built-in micro SD card slot, up to 256GB
- DC12V/PoE power supply
- Support three streams
- P2P function optional
- IP 67&IK10
- Support mobile surveillance by smart phones with iOS and Android OS
- Intelligent analytics

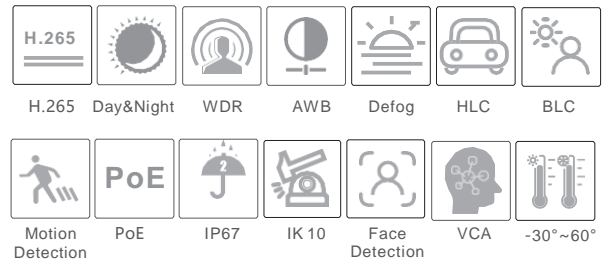


### SPECIFICATIONS

Model	NGC-7282F
<b>Specifications</b>	
<b>Camera</b>	
Image Sensor	1 / 2.8" CMOS
Image Size	3840×2160
Electronic Shutter	1 s ~ 1 / 100000 s
Iris Type	Fixed Iris
Min. Illumination	1. 0.01lux @ F1.2, AGC ON; 0 lux with IR 2. 0.02lux @ F1.6, AGC ON; 0 lux with IR
Lens	2.8mm@F1.6, Horizontal FoV:109.7°;Vertical FoV:77.2°;Diagonal FoV:116.9°
Focus	Fixed
Lens Mount	M12
Day&Night	ICR
Wide Dynamic Range	120dB
BLC	Yes
HLC	Yes
Defog	Yes
Digital NR	3D DNR
Angle Adjustment	Pan : 0°~355°, Tilt : 0°~67°, Rotation : 0°~355°
<b>Image</b>	
Video Compression	Smart H.265 / H.265+ / H.265 / Smart H.264 / H.264+ / H.264 / MJPEG
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile
Resolution	8MP ( 3840 × 2160 ), 6MP( 3072 × 2048 ),5MP( 2592 × 1944 ), 4MP( 2592 × 1520 ), 2K ( 2560 × 1440 ), 3MP ( 2304 × 1296 ), 1080P ( 1920 × 1080 ), 720P ( 1280 × 720 ), D1, CIF, 480 × 240
Main Stream	60Hz : 8MP/6MP(1~20fps), 5MP/4MP/2K/3MP/1080P/720P(1~30fps) 50Hz : 8MP/6MP(1~20fps), 5MP/4MP/2K/3MP/1080P/720P(1~25fps) HFR Mode: 1080P/720P(60Hz: 1~60fps; 50Hz: 1~50fps)
Sub Stream	720P/D1/CIF/480 × 240 (60Hz: 1~30fps; 50Hz: 1~25fps)
Third Stream	D1/CIF/480 × 240 (60Hz: 1~30fps; 50Hz: 1~25fps)
Bit Rate	64 Kbps ~ 12 Mbps
Bit Rate Type	VBR / CBR
Audio Compression	G711A / U
Image Settings	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, NR, etc. adjustable through client software or web browser
ROI	Each ROI to be configured separately
<b>Intelligent Analytics (Smart Events)</b>	
Perimeter Protection	Line crossing, region entrance/exiting/intrusion (human/motor vehicle/non-motor vehicle classification)
Target Counting	Line crossing human/motor vehicle/non-motor vehicle counting
Exception Detection	Scene change, video blur and video color cast detection
Face Detection	Face detection and face capture
General Intelligence	Crowd density detection, heat map, object abandoned/missing detection*
<b>Interfaces</b>	
Network	RJ45
Video Output	No
Audio	1CH audio input; 1CH built-in MIC
Alarm	1CH alarm input; 1CH alarm output
Storage	Built-in micro SD card slot; up to 256GB
Reset	Yes
<b>Functions</b>	
Remote Monitoring	Web browsing, CMS remote control
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, SNMP, 802.1x, UPnP, HTTPs, QoS
Interface Protocol	ONVIF
Storage	Network remote storage; micro SD card storage
Smart Alarm	Motion detection; SD card error; SD card full; IP address conflict; Cable disconnection
General Function	Watermark, IP address filtering, video mask, heartbeat, password protection, image distortion correction, etc.

IR Distance	20~30m
Protection Grade	IP 67&IK10
PoE	Yes (IEEE802.3af)
<b>Others</b>	
Power Supply	DC12V/PoE
Power Consumption	< 9W
Operating Environment	- 30 °C ~ 60 °C (-22°F~140°F) Humidity: less than 95 % (non-condensing)
Dimensions ( mm )	Φ 119 × 87.8
Weight ( net )	Approx. 0.64KG
Installation	Ceiling mounting; Wall mounting
Certificate	CE, FCC
Environmental Protection	Complies with Directive EU RoHS, WEEE(2012/19/EU) , directive 94/62/EC and REACH(EC1907/2006)

### DIMENSIONS

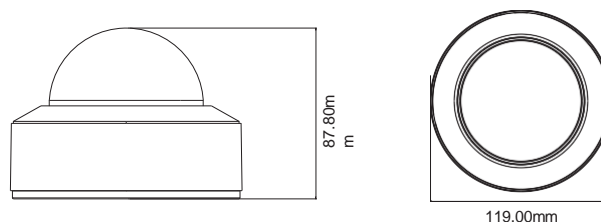

### AVAILABLE ACCESSORIES

