


NGC-7261F2.8-ID

6MP Dual Illumination Water-proof Turret Network Camera



- H.265+ /H.265 /H.264+ /H.264/MJPEG coding
- Max. resolution: 6MP (3200 × 1800)
- Auto day/night switch
- 3D DNR, WDR, HLC, BLC, etc.
- ROI coding
- Support smart supplement light
- 10~20m white light view distance; 20~30m IR view distance
- DC12V/PoE power supply
- IP 67 ingress protection
- Support dual streams
- Support remote monitoring by smart phones& tablet PCs with iOS and Android OS
- Support line crossing detection & region intrusion detection
- Support SMD

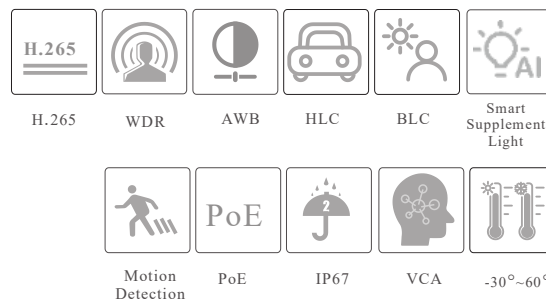

NGC-7261F2.8-ID


6MP Dual Illumination
Turret Network Camera

SPECIFICATIONS

Specifications	Model	NGC-7261F2.8-ID			
Camera					
Image Sensor	1 / 2.7 "CMOS				
Image Size	3200×1800				
Electronic Shutter	1 / 2s ~ 1 / 100000s				
Iris Type	Fixed Iris				
Min. Illumination	0.007 lux @F1.6, AGC ON; 0 lux with illuminator on				
Lens	2.8mm@F1.6, Horizontal FoV:110.5°; Vertical FoV:57°; Diagonal FoV:131° 3.6mm@F1.6, Horizontal FoV:91.5°; Vertical FoV:49.5°; Diagonal FoV:107°				
Focus	Fixed				
Lens Mount	M12				
Day&Night	ICR				
Wide Dynamic Range	Digital WDR				
BLC	Yes				
HLC	Yes				
Digital NR	Yes				
S/N Ratio	≥ 50 dB				
Angle Adjustment	Pan: 0°~360°; Tilt: 0°~75°; Rotation: 0°~360°				
DORI Distance					
Lens	Detect	Observe	Recognize	Identify	
2.8mm	60m(196ft)	24m(78ft)	12m(39ft)	6m(20ft)	
3.6mm	71m(233ft)	28m(93ft)	14m(47ft)	7m(23ft)	
Image					
Video Compression	Main stream: H.265+ / H.265 / H.264 + / H.264 Sub stream: H.265+ / H.265 / H.264 + / H.264 / MJPEG				
H.265 Compression Standard	Main Profile@Leve4.1 High Tier				
Resolution	6MP(3200×1800), 4MP(2688×1520), 1080P(1920×1080), 720P(1280×720), D1, VGA(640×480), 480×240, CIF				
Main Stream	60Hz: 6MP(1~20fps)/4MP/1080P(1~30fps); 50Hz: 6MP(1~20fps)/4MP/1080P(1~25fps)				
Sub Stream	60Hz: 720P/D1/VGA/ CIF/480×240(1~30fps); 50Hz: 720P/D1/VGA/ CIF/480×240(1~25fps)				
Bit Rate	64 Kbps~8Mbps				
Bit Rate Type	VBR / CBR				
Audio Compression	G711A/U				
Image Settings	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, Image Mirror, Image Flip, NR, etc. adjustable through client software or web browser				
ROI	Each ROI to be configured separately				
Interfaces					
Network	RJ45				
Video Output	No				
Audio	1CH built-in MIC				
Storage	No				
Reset	No				
Functions					
Remote Monitoring	Web browser /Navaio NVR/NVMS2.X/Mobile APP				
Web Browser	IE 11 (plug-in required)/Chrome 89.0+/Edge 89.0+/Firefox 87.0+/Safari 14.0+				
Online Connection	Support simultaneous monitoring for up to 3 users; Support multi-stream real time transmission				
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, 802.1x, HTTP				
Interface Protocol	ONVIF				
Storage	Network remote storage				
Motion Detection	Support smart motion detection; filtering motion alarm triggered by other target types except humans.				
Smart Event	(Human) region intrusion detection, (human)line crossing detection				
General Function	Watermark, video mask, heartbeat				
Security	Video encryption, firmware encryption, configuration encryption, illegal loginlock, IP address filtering, 802.1x authentication, basic and digest authentication for HTTP				

PoE	Yes, IEEE802.3af
Supplement Light Range	IR range: 20 ~ 30 m; white light range: 10 ~ 20 m
Ingress Protection	IP67
Others	
Power Supply	DC12V/PoE
Power Consumption	< 6W
Operating Environment	- 30 °C ~ 60 °C (-22°F~140°F), Humidity: less than 95 % (non-condensing)
Storage Environment	- 30 °C ~ 65 °C (-22°F~149°F), Humidity: less than 95 % (non-condensing)
Dimensions (mm)	Φ 94.6× 82.8
Weight (net)	Approx. 0.423KG
Installation	Ceiling mounting; Wall mounting
Certificate	CE, FCC
Environmental Protection	Complies with Directive EU RoHS, WEEE(2012/19/EU) , directive 94/62/EC and REACH(EC1907/2006)

DIMENSIONS

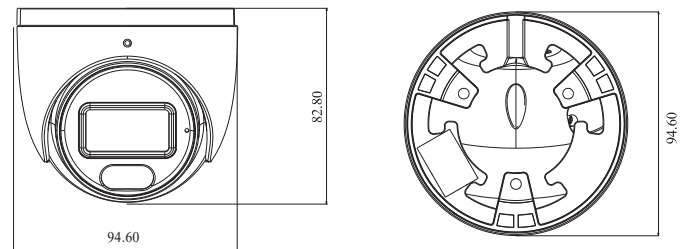

AVAILABLE ACCESSORIES



NAV-DJB



NAV-SD



NAV-DJB +
NAV-BPB + NAV-SAS



NAV-DJB +
NAV-BPB + NAV-SAC



NAV-DJB +
NAV-BTB