


Z-Wave Dongle



Climax Technology Z-Wave Dongle enables any devices with USB serial port to be integrated into Z-Wave network with the dongle via Virtual COM port USB to UART interface, providing easy Z-Wave compatibility solution for existing products.

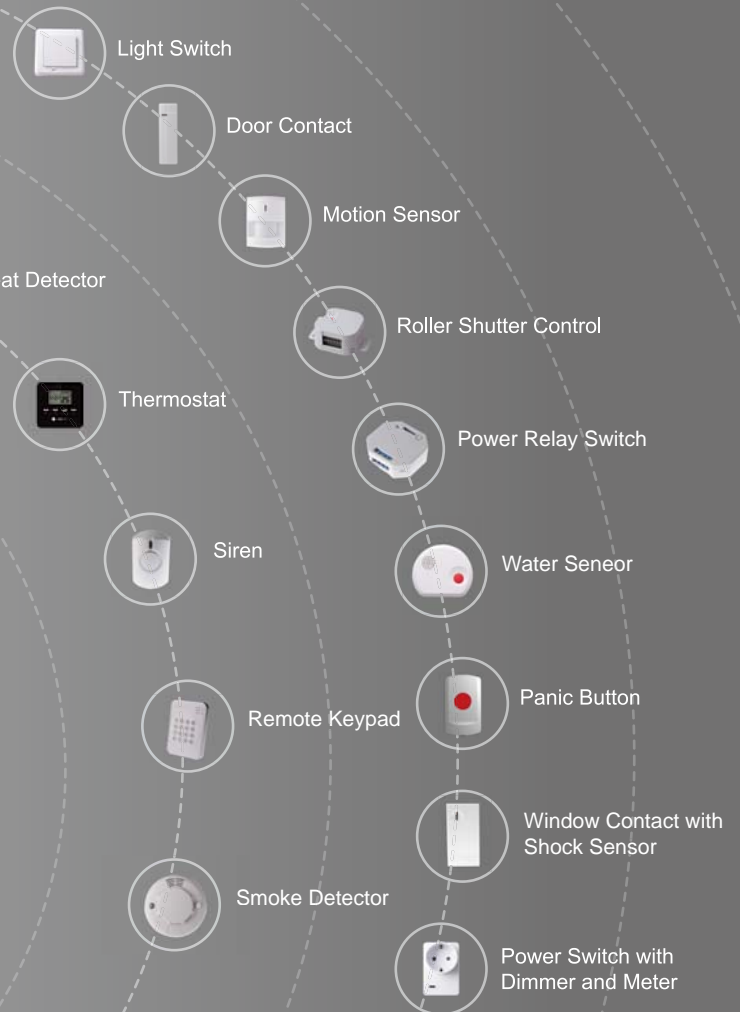

Features & Specifications

- Z-Wave Certified product
- Serial API
- USB 2.0
- Prolific PL2303 Virtual COM Port
- Z-Wave Plus 500 series module
- Controls up to 250 Z-Wave devices
- LED Indicator
- Frequencies: 868.40 MHz (EU) / 908.40 MHz (US)
- Output Power: 4 dBm
- RX Sensitivity: -103 dBm
- Data Rate: 9.6/40/100 kbit/s
- Range: 100 meters (outdoor)
- Operating Humidity: up to 85% non-condensing
- Operating Temperature: -10° to 50°C (14°F to 122°F)
- Dimension: 73.5mm x 27mm x 12mm