




NAC-T521R

20xIR HD TVI Speed Dome Camera

20x IR HD High Speed Dome Camera

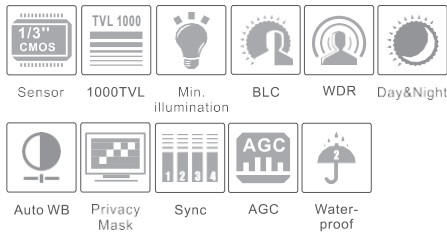

Features

- 1 / 3" CMOS progressive scan, 20x optical zoom
- HD-TVI video output : 1920 x 1080P@25 / 30fps
- 100m IR night view distance
- Advanced stepping motor drive
- Pan / tilt preset speed up to 240 °/s
- Video output : 1 CH HD-TVI
- IP66 ingress protection; 4KV lightning protection, surge protection
- Support address setup by dial switches or by OSD menu; easy operation

Dimensions

Specifications

Model	NAC-T521R
Specifications	
Camera	
Image Sensor	1 / 3" Inch Progressive CMOS
Effective Pixels	1920 x 1080 2Mega
Horizontal Resolution	1000 TVL
Min. Illumination	0 Lux
IR Distance	100 m
White Balance	Auto / Manual
S / N Ratio	> 50 dB
Day / Light	Auto / Manual
Focus Mode	Auto / Manual
Lens	20x Zoom, f = 4.7 ~ 94 mm, F1.6 ~ F3.5
PTZ	
Pan Range	360° endless rotation
Pan Speed	Preset speed : 240 °/s; Manual control speed : 0.5 ~ 90 °/s
Tilt Range	0 ~ 90° (auto rotation)
Tilt Speed	Preset speed : 240 °/s; Manual control speed : 0.5 ~ 90 °/s
System	
PTZ Control	Yes
Preset	255
Patrol	8
Trace	4
Time Task	8
Scan	2
Home Position	Yes
Auto Flip	Yes
Alarm Input	7 CH (NC / NO)
Alarm Output	1 CH
AlarmLinkage	Yes
Video Output	HD-TVI : 1.0Vp-p, 75Ω, PAL / NTSC
OSD	English
Control	RS422 / RS485, PELCO-D / PELCO-P (It can be added according to users needs)
Others	
Power Supply	AC 24V / 3000 mA
Power Consumption	15 W (max 65W, IR on, heater on)
Working Environment	Temperature : - 20 °C ~ 60 °C; Humidity : less than 95%
Protection Level	IP66; TVS 4KV lightning protection, surge protection
Weight	5 KG
Dimensions (mm)	Φ 216 x 349