




NGC-7201F2.8

**1.3 Megapixels Network Water-proof
Dome Camera**


1.3 Megapixels Network Water-proof Dome Camera

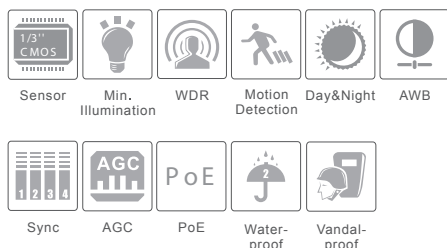

Features

- 960P (1280 x 960) full real time coding
- Max. resolution: 1280 x 960
- ICR auto switch, true day / night
- 10 ~ 20m IR night view distance optional
- 3D DNR, digital WDR
- ROI coding
- PoE power supply optional
- Support smart phone, iPad, remote monitoring
- Support P2P
- Support triple streams
- IP66 & IK10 ingress protection

Dimensions

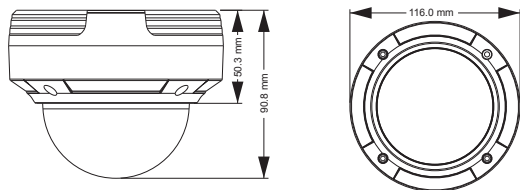

Specifications

Model	NGC-7201F2.8	
Specifications		
Camera		
Image Sensor	1 / 3 "CMOS	
Image Size	1280 x 960	
Electronic Shutter	1 / 25 s ~ 1 / 100000 s	
Min. Illumination	0 Lux (IR LED ON)	
Lens	2.8 mm	
Lens Mount	M12	
Image		
Video Compression	H.264 / MJPEG	
Resolution	960P (1280 x 960) 、 720P (1280 x 720) 、 D1、 CIF、 480 x 240	
Multi-stream	1280 x 960 (1 ~ 30fps) / 1280 x 720 (1 ~ 30fps) 1280 x 720 (1 ~ 10fps) / D1 (1 ~ 30fps) / CIF (1 ~ 30fps) CIF (1 ~ 30fps) / 480 x 240 (1 ~ 30fps)	
Bit rate	64 Kbps ~ 4 Mbps	
Encode Mode	VBR / CBR	
Quality	Five levels under VBR; Freely adjustable under CBR	
Image Settings	Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR,etc. adjustable through client software or web browser	
Interfaces		
Network	RJ45	
Audio	No	
Functions		
Remote Monitoring	IE browsing,CMS remote control	
Online Connection	Support simultaneous monitoring for up to 4 users; Support multi-stream real time transmission	
Protocol	TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP	
Storage	Network remote storage	
Smart Alarm	Motion Alarm	
Day & Night	ICR	
PoE	Yes	No
IR Distance	10 ~ 20m optional	
Water-proof	IP66	
Others		
Power Supply	DC 12V / PoE	DC 12V
Power Consumption	< 2.5W	
IR Consumption ON	< 4.5W	
Operating Environment	- 20 °C ~ 50 °C,10 % ~ 90 % humidity	
Dimensions (mm)	Φ 116 × 91	
Weight (net)	594 g	