



NGC-7226

3 Megapixels Network Water-proof
Dome Camera


3 Megapixels Network Water-proof Dome Camera



Features

- 3MP (2048 x 1536) non-real time coding
- Max. resolution: 2048 x 1536
- ICR auto switch, true day / night
- 10 ~ 20m IR night view distance optional
- 3D DNR, digital WDR
- ROI coding
- Support PoE power supply
- Support smart phone, iPad, remote monitoring
- Support P2P
- IP66 & IK10 ingress protection

Dimensions

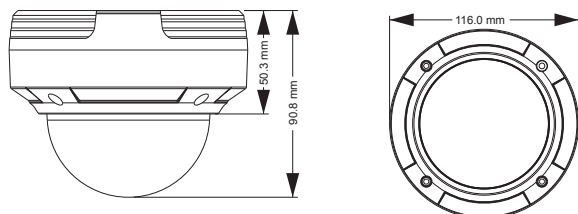

Specifications

Model	NGC- 7226
Specifications	
Camera	
Image Sensor	1 / 3 "CMOS
Image Size	2048 x 1536
Electronic Shutter	1 / 25 s ~ 1 / 100000 s
Min. Illumination	0 Lux (IR LED ON)
Lens	3.6 mm (6 mm, 8 mm optional)
Lens Mount	M12
Image	
Video Compression	H.264 / MJPEG
Resolution	3MP (2048 × 1536), 1080P (1920 × 1080), 720P (1280 × 720), D1、CIF、480 x 240
Multi-stream	3MP (1 ~ 15fps) / 1920 x 1080 (1 ~ 30fps) 1280 x 720 (1 ~ 10fps) / D1 (1 ~ 30fps) / CIF (1 ~ 30fps) CIF (1 ~ 30fps) / 480 x 240 (1 ~ 30fps)
Bit rate	64 Kbps ~ 8 Mbps
Encode Mode	VBR / CBR
Quality	Five levels under VBR; Freely adjustable under CBR
Image Settings	ROI coding, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
Interfaces	
Network	RJ45
Functions	
Remote Monitoring	IE browsing, CMS remote control
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission
Protocol	TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
Storage	Network remote storage
Smart Alarm	Motion Alarm
Day & Night	ICR
PoE	Yes
IR Distance	10 ~ 20 m optional
Water-proof	IP66
Others	
Power Supply	DC 12V / PoE
Power Consumption	< 3W
IR Consumption ON	< 5.5W
Operating Environment	- 20 °C ~ 50 °C, 10 % ~ 90 % humidity
Dimensions (mm)	Φ 116 × 91
Weight (net)	380g