



NGC-7322F

2 MP Network IR Water-proof
Bullet Camera


2 MP Network IR Water-proof Bullet Camera



Features

- 1080P (1920 × 1080) full real time coding
- Max. resolution : 1920 × 1080
- ICR auto switch, true day/night
- 20 ~ 30m IR night view distance
- 3D DNR, digital WDR
- ROI coding
- Support one-way audio
- Support PoE power supply
- Support smart phone, iPad, remote monitoring
- Support P2P
- IP66 ingress protection
- Support three streams

Dimensions

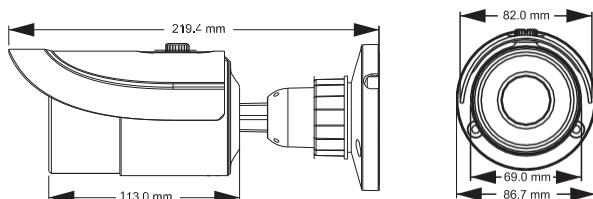

Specifications

Model	NGC-7322F
Specifications	
Camera	
Image Sensor	1 / 2.7 "CMOS
Image Size	1920 × 1080
Electronic Shutter	1 / 25 s ~ 1 / 100000 s
Min. Illumination	0.05 lux @ F1.2; AGC ON; 0 lux with IR
Lens	3.6 mm, @ F1.4, angle of view: 77° ~ 3°
Lens Mount	M12: Ø14
Angle Adjustment	Any angle
Image	
Video Compression	H.264 / MJPEG
Resolution	1080P (1920×1080), 720P (1280×720), D1, CIF, 480×240
Main Stream	60Hz : 1080P(1 ~ 30fps) / 720P(1 ~ 30fps) 50Hz : 1080P(1 ~ 25fps) / 720P(1 ~ 25fps)
Bit Rate	64 Kbps ~ 8 Mbps
Encode Mode	VBR / CBR
Quality	Five levels under VBR; Freely adjustable under CBR
Image Settings	ROI, Saturation, Brightness, Chroma offset, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
Interfaces	
Network	RJ45
Audio	MIC IN × 1
Functions	
Remote Monitoring	IE browsing, CMS remote control
Online Motion	Support simultaneous monitoring of up to 4 users; Support multi-stream real time transmission
Protocol	TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
Storage	Network remote storage
Smart Alarm	Motion alarm
Day & Night	ICR
PoE	Yes
IR Distance	20 ~ 30 m
Waterproof	IP66
Others	
Power Supply	DC 12V / PoE
Power Consumption	< 3W
IR Consumption ON	< 6W
Operating Environment	-20 °C ~ 50 °C, 10 % ~ 90 % humidity
Dimensions (mm)	Φ 87 × 219
Weight (net)	578g
Installation	Wall mounting, pendant hanging