




NGC-7326

3 Megapixels Network IR Water-proof
Bullet Camera

3 Megapixels Network IR Water-proof Bullet Camera

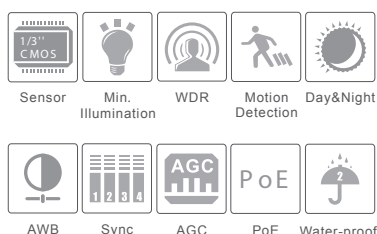


NGC-7326

Features

- 3MP (2048 x 1536) non-real time coding
- Max. resolution: 2048 x 1536
- ICR auto switch, true day / night
- 20 ~ 30m IR night view distance
- 3D DNR, digital WDR
- ROI coding
- Support PoE power supply
- Support smart phone, iPad, remote monitoring
- Support P2P

Dimensions

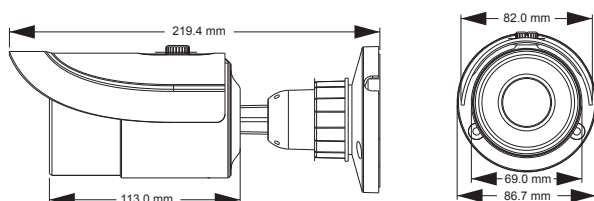

Specifications

Model		
Specifications		
Camera		
Image Sensor	1 / 3 "CMOS	
Image Size	2048 x 1536	
Electronic Shutter	1 / 25 s ~ 1 / 100000 s	
Min. Illumination	0 Lux (IR LED ON)	
Lens	6 mm (3.6 mm, 8 mm, 2.8 ~ 12 mm optional)	
Lens Mount	M12	Φ14
Image		
Video Compression	H.264 / MJPEG	
Resolution	3MP (2048 × 1536)、 1080P (1920 × 1080)、 720P (1280 × 720)、 D1、 CIF、 480 x 240	
Multi-stream	3MP (1 ~ 15fps) / 1920 x 1080 (1 ~ 30fps) 1280 x 720 (1 ~ 10fps) / D1 (1 ~ 30fps) / CIF (1 ~ 30fps) CIF (1 ~ 30fps) / 480 x 240 (1 ~ 30fps)	
Bit rate	64 Kbps ~ 8 Mbps	
Encode Mode	VBR / CBR	
Quality	Five levels under VBR; Freely adjustable under CBR	
Image Settings	ROI coding, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser	
Interfaces		
Network	RJ45	
Functions		
Remote Monitoring	IE browsing, CMS remote control	
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission	
Protocol	TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP	
Storage	Network remote storage	
Smart Alarm	Motion Alarm	
Day & Night	ICR	
PoE	Yes	
IR Distance	20 ~ 30 m	
Water-proof	IP66	
Others		
Power Supply	DC 12V / PoE	
Power Consumption	< 4W	
IR Consumption ON	< 7W	
Operating Environment	- 20 °C ~ 50 °C, 10 % ~ 90 % humidity	
Dimensions (mm)	Φ 87 × 219	
Weight (net)	590g	