


Enhanced Alarm Output Controller

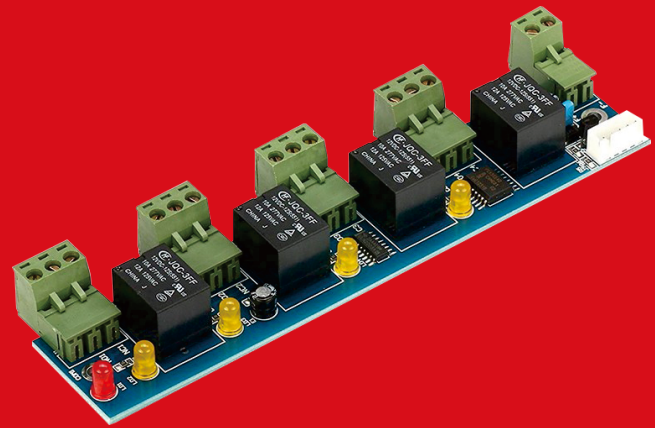

NAV-ACCESS EA

Overview

ACB-EA05 Fire alarm output and the expansion of joint board, it is one of the access controller add-on modules, with the software settings, mainly used to provide fire and alarm signal output of the joint. The module has a practical, simple interface, the design performance characteristics of stability. With its power and relay instructions, may direct communication failures, is a good cost performance of the joint extension.

The characteristics of the module

1. Four-alarm output, free to the host controller to the definition of a door and the door to a number of features.
2. Can connect the output signal fire, the Fire received the signal controller automatically open their doors to all and have a fire alarm records available for consultation.
3. Support for the 'illegal intrusion' and 'the door is not closed for a long time' and 'coercion to enter,' and 'linkage to open the door' and 'invalid card' and 'fire' alarm linkage output, and so on.
4. Can be set for each output of the delay time 0-6000 seconds.

Specifications

Model No.	NAV-ACCESS EA
Product Name	Enhanced Alarm Output and Integrated Fire Control Expansion Panel
Basic Info	
Size	160x32mm
Weight	0.25kg
Packing Way	Brown box
Accessories	User Manual, warranty card, necessary parts for connecting panel

Function Introduction

Can Control

invalid break in alarm, long time unlocking alarm, intimidation break in alarm, unlocking linkage output, invalid card swiping alarm, integrated fire control alarm

Should pay attention to

This enhanced Alarm Output and Integrated Fire Control Expansion Panel only can compat with the ACB series controller, and the software be V6.6 or higher version.

Output and input

1-way input and 4-way alarm output, You can specify which function to which door of the controlled area, Can connect the fire control output, when fire signal received, doors in the controlled area will be open automatically, and five alarm will be recorded.

Other

Allow to change anti-intimidation password
Can set long time unlocking alarm time: 0-6000 seconds
Can set the time delay of each output from 0 to 6000

The appearance of structure

