

TEST REPORT


Applicant: Bentel Sistem SRL

Address of Applicant: HEGEL STREET NO.1, 400448 Cluj-Napoca, Romania

Equipment Under Test (EUT)

Product Name: Dome camera

Model No.: NGC-7221, NGC-7226, NGC-7231, NGC-7232, NGC-7233, NAC-T221, NAC-T231, NAC-T241, NGC-7522R, NAC-T521R, NAC-T251

Trade Mark: 

Applicable standards: EN 55022:2010/AC:2011
EN 55024:2010
EN 61000-3-2:2006+A1:2009+A2:2009
EN 61000-3-3:2013

Date of sample receipt: 07 Nov. 2012

Date of Test: 07 Nov. 2012

Date of report issued: 19 Mar. 2015

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Lo

Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the GTS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of GTS or testing done by GTS in connection with, distribution or use of the product described in this report must be approved by GTS in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


2 Version

Report No.	Version No.	Date	Description
GTSE13050076301	00	28 May, 2013	Original
GTSE13090151501	01	10 Sep. 2013	New report 1*
GTSE14060093001	02	05 Jun. 2014	New report 2*
GTSE15030028201	03	19 Mar. 2015	New report 3*

Remark:

The differences between New report 3* and New report 2* are applicant, address of applicant, model name and trade mark, there is no difference test, for the detail, please refer to section 1 and 5.

Prepared by:



Date:

19 Mar. 2015

Project Engineer

Reviewed by:



Date:

19 Mar. 2015

Reviewer

3 Contents

1	COVER PAGE.....	1
2	VERSION.....	2
3	CONTENTS.....	3
4	TEST SUMMARY.....	4
5	GENERAL INFORMATION.....	5
5.1	CLIENT INFORMATION.....	5
5.2	GENERAL DESCRIPTION OF EUT.....	5
5.3	TEST MODE AND TEST VOLTAGE.....	5
5.4	DESCRIPTION OF SUPPORT UNITS.....	5
5.5	DEVIATION FROM STANDARDS.....	5
5.6	ABNORMALITIES FROM STANDARD CONDITIONS.....	5
5.7	MONITORING OF EUT FOR ALL IMMUNITY TEST.....	5
5.8	TEST FACILITY.....	6
5.9	TEST LOCATION.....	6
6	TEST INSTRUMENTS LIST.....	7
7	EMISSION TEST RESULTS.....	9
7.1	RADIATED EMISSION.....	9
7.2	CONDUCTED EMISSION.....	15
7.3	HARMONICS TEST RESULTS.....	18
7.4	FLICKER EMISSION.....	18
8	IMMUNITY TEST RESULTS.....	19
8.1	PERFORMANCE CRITERIA DESCRIPTION IN CLAUSE 7 OF EN 55024.....	19
8.2	ELECTROSTATIC DISCHARGE.....	20
8.3	RADIO-FREQUENCY ELECTROMAGNETIC FIELD AMPLITUDE MODULATED.....	22
8.4	ELECTRICAL FAST TRANSIENTS.....	24
8.5	SURGES.....	26
8.6	RADIO-FREQUENCY CONTINUOUS CONDUCTED.....	28
8.7	VOLTAGE DIPS AND VOLTAGE INTERRUPTIONS.....	29
9	TEST SETUP PHOTO.....	30
10	EUT CONSTRUCTIONAL DETAILS.....	33

4 Test Summary

Test item	Test Requirement	Test Method	Class / Severity	Result
Radiated Emission #	EN 55022	EN 55022	Class B	Pass
Conducted Emission	EN 55022	EN 55022	Class B	Pass
Harmonic Emission	EN 61000-3-2	EN 61000-3-2	N/A	N/A
Flicker Emission	EN 61000-3-3	EN 61000-3-3	Clause 5	Pass
Electrostatic discharge	EN 55024	EN 61000-4-2:2009	Contact $\pm 2, \pm 4$ kV Air $\pm 2, \pm 4, \pm 8$ kV	Pass
Radio-frequency electromagnetic field Amplitude modulated	EN 55024	EN 61000-4-3: 2006+A1: 2008 +A2: 2010	3V/m 80%, 1kHz, AM	Pass
Electrical fast transients	EN 55024	EN 61000-4-4: 2012	AC ± 1.0 kV	Pass
Surges	EN 55024	EN 61000-4-5: 2014	± 1 kV D.M	Pass
Radio-frequency continuous conducted	EN 55024	EN 61000-4-6: 2014	3Vrms (emf), 80%, 1kHz Amp. Mod.	Pass
Voltage dips and Voltage interruptions	EN 55024	EN 61000-4-11: 2004	0 % U_T^* for 0.5per 0 % U_T^* for 250per 70 % U_T^* for 25per	Pass

Remark:

1. Pass: Comply with the essential requirements in the standard.
2. U_T : the nominal supply voltage; D.M: Differential Mode.
3. N/A : not applicable
4. # Refer to EN55022 clause 6.2 conditional testing procedure :

The highest frequency generated or used in the EUT	Test frequency range of Radiated emission
<108MHz	30MHz ~ 1GHz
108MHz ~ 500MHz	30MHz ~ 2GHz
500MHz ~ 1GHz	30MHz ~ 5GHz
>1GHz	30MHz ~ 5times the highest frequency or 30MHz ~ 6 GHz, whichever is less

The highest frequency of the internal sources of the EUT is 800MHz.

5 General Information

5.1 Client Information

Applicant:	Bentel Sistem SRL
Address of Applicant:	HEGEL STREET NO.1, 400448 Cluj-Napoca, Romania
Manufacturer:	SHENZHEN TVT DIGITAL TECHNOLOGY CO., LTD.
Address of Manufacturer:	6/E, North Block, CE Lighting House, Hi-Tech Park, Nanshan District, Shenzhen, P.R. China

5.2 General Description of EUT

Product Name:	Dome camera
Model No.:	NGC-7221, NGC-7226, NGC-7231, NGC-7232, NGC-7233, NAC-T221, NAC-T231, NAC-T241, NGC-7522R, NAC-T521R, NAC-T251
Power supply:	DC12.0V, 1A (power from adapter)

5.3 Test mode and Test voltage

Test mode:	
On mode	Keep the EUT working normal.
Test voltage:	
Adapter: Input AC 230V/50Hz Output DC12.0V/1A	

5.4 Description of Support Units

Description	Manufacturer	Model	Serial Number
PC Host	Lenovo PC Host	M6900	EA05257893
MONITOR	DELL	VS12490	GTS237-1
TV	PHILIPS	19PFL3120/T3	AU1A1212002906
KEYBOARD	DELL	SK-8115	N/A
MOUSE	DELL MOUSE	N/A	N/A
PRINTER	Canon	IP1600	GTS222
DVD Player	Pioneer	DV-420V-K	090502-11

5.5 Deviation from Standards

None.

5.6 Abnormalities from Standard Conditions

None.

5.7 Monitoring of EUT for All Immunity Test

Visual:	Monitor the display of the EUT
Audio:	Monitor the sound from the EUT

5.8 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS —Registration No.: CNAS L5775**

CNAS has accredited Global United Technology Services Co., Ltd. to ISO/IEC 17025 General Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **FCC —Registration No.: 600491**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, July 20, 2010.

- **Industry Canada (IC) —Registration No.: 9079A-1**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-1.

5.9 Test Location

CS and RS test items were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,
No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.
518057.

All other test items were performed at:

Global United Technology Services Co., Ltd.
Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen,
China
Tel: 0755-27798480; Fax: 0755-27798960

6 Test Instruments List

Radiated Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.0(L)*6.0(W)* 6.0(H)	GTS250	Mar. 30 2011	Mar. 29 2013
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	ESU EMI Test Receiver	R&S	ESU26	GTS203	Jul. 07 2012	Jul. 06 2013
4	BiConiLog Antenna	SCHWARZBECK	VULB9163	GTS214	Mar. 10 2012	Mar. 09 2013
5	Double -ridged waveguide horn	SCHWARZBECK	9120D	GTS208	Mar. 10 2012	Mar. 09 2013
6	RF Amplifier	HP	8347A	GTS204	Jul. 07 2012	Jul. 06 2013
7	Preamplifier	HP	8349B	GTS206	Jul. 07 2012	Jul. 06 2013
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial cable	GTS	N/A	GTS210	Jul. 07 2012	Jul. 06 2013
10	Coaxial Cable	GTS	N/A	GTS211	Jul. 07 2012	Jul. 06 2013
11	Thermo meter	N/A	N/A	GTS256	Jul. 06 2012	Jul. 05 2013

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	Sep. 08 2011	Sep. 07 2013
2	EMI Test Receiver	R&S	ESCS30	GTS223	Jul. 07 2012	Jul. 06 2013
3	Pulse Limiter	R&S	ESH3-Z2	GTS224	Jul. 07 2012	Jul. 06 2013
4	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	Jul. 07 2012	Jul. 06 2013
5	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	Jul. 07 2012	Jul. 06 2013
6	Coaxial Cable	GTS	N/A	GTS227	Jul. 07 2012	Jul. 06 2013
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Thermo meter	KTJ	TA328	GTS233	Jul. 27 2012	Jul. 26 2013

Electrical fast transients/ Surges/ Voltage dips and interruptions						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	EMTEST system	EMTEST	UCS500N	GTS239	Jul. 07 2012	Jul. 06 2013
2	Thermo meter	KTJ	TA328	GTS238	Jul. 27 2012	Jul. 26 2013

Electrostatic discharge						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	ESD Simulator	EMPEK	ESD-2030A	GTS242	Jul. 07 2012	Jul. 06 2013
2	Thermo meter	KTJ	TA328	GTS243	Jul. 06 2012	Jul. 05 2013

Flicker						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Power Analyzer	EMTEST	DPA500	GTS235	Jul. 03 2012	Jul. 02 2013
2	AC Power Source	EMTEST	ACS500	GTS236	Jul. 03 2012	Jul. 02 2013
3	Test software	EMTEST	ACS	N/A	N/A	N/A
4	Thermo meter	KTJ	TA328	GTS256	Jul. 05 2012	Jul. 04 2013



Radio-frequency electromagnetic field Amplitude modulated						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	June 15 2012	June 16 2013
2	Signal Generator	Rohde & Schwarz	SML03	SEL0068	June 22 2012	June 23 2013
3	RF Amplifier 30M-1GHz	Amplifier Research	250W1000A	SEL0066	Nov. 04 2012	Nov. 03 2013
4	RF Amplifier 0.8-3.0GHz	Amplifier Research	60S1G3	SEL0065	Nov. 04 2012	Nov. 03 2013
5	Power Meter	Rohde & Schwarz	NRVD	SEL0069	June 22 2012	June 23 2013
6	Power Sensor	Rohde & Schwarz	URV5-Z2	SEL0071	June 22 2012	June 23 2013
7	Power Sensor	Rohde & Schwarz	URV5-Z2	SEL0072	June 22 2012	June 23 2013
8	Software EMC32	Rohde & Schwarz	EMC32-S	SEL0082	N/A	N/A
9	Log-periodic Antenna	Amplifier Research	AT1080	SEL0073	N/A	N/A
10	Antenna Tripod	Amplifier Research	TP1000A	SEL0074	N/A	N/A
11	High Gain Horn Antenna (0.8-5GHz)	Amplifier Research	AT4002A	SEL0075	N/A	N/A

Radio-frequency continuous conducted						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	RF-Generator	SCHAFFNER	NSG 2070	SEL0039	Oct. 21 2012	Oct. 20 2013
2	Coupling/Decoupling Network	SCHAFFNER	CDN M016	SEL0040	Oct. 21 2012	Oct. 20 2013
3	EM CLAMP	SCHAFFNER	KEMZ 801	SEL0041	Oct. 21 2012	Oct. 20 2013

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (dd-mm-yy)	Cal.Due date (dd-mm-yy)
1	Barometer	ChangChun	DYM3	GTS257	July 10 2012	July 09 2013

7 Emission Test Results

7.1 Radiated Emission

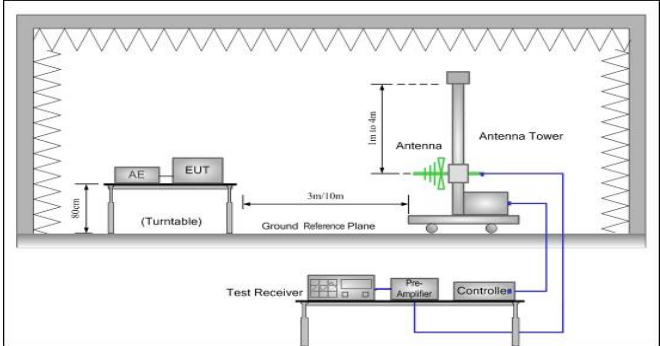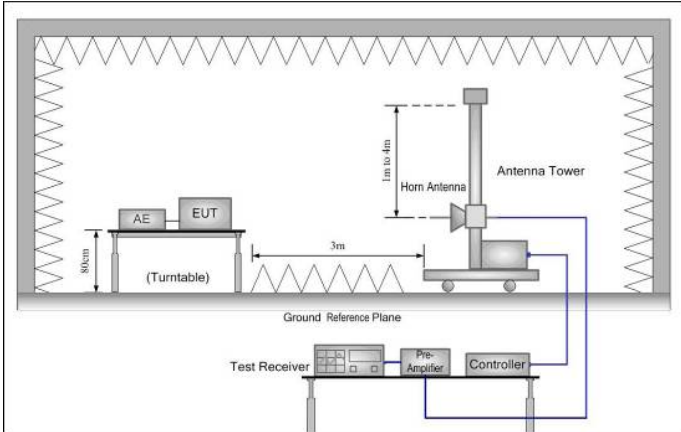
Test Requirement:	EN 55022																								
Test Method:	EN 55022																								
Test Frequency Range:	30MHz to 5GHz																								
Class / Severity:	Class B																								
Test site:	Measurement Distance: 3m																								
Receiver setup:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Value</th> </tr> </thead> <tbody> <tr> <td>30MHz-1GHz</td> <td>Quasi-peak</td> <td>120KHz</td> <td>300KHz</td> <td>Quasi-peak</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak</td> </tr> <tr> <td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Average</td> </tr> </tbody> </table>				Frequency	Detector	RBW	VBW	Value	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak	Above 1GHz	Peak	1MHz	3MHz	Peak	Peak	1MHz	3MHz	Average		
Frequency	Detector	RBW	VBW	Value																					
30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak																					
Above 1GHz	Peak	1MHz	3MHz	Peak																					
	Peak	1MHz	3MHz	Average																					
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit (dBμV/m @3m)</th> <th>Value</th> </tr> </thead> <tbody> <tr> <td>30MHz-230MHz</td> <td>40.00</td> <td>Quasi-peak</td> </tr> <tr> <td>230MHz-1GHz</td> <td>47.00</td> <td>Quasi-peak</td> </tr> <tr> <td>1GHz-3GHz</td> <td>70.00</td> <td>Peak</td> </tr> <tr> <td>1GHz-3GHz</td> <td>50.00</td> <td>Average</td> </tr> <tr> <td>3GHz-6GHz</td> <td>74.00</td> <td>Peak</td> </tr> <tr> <td>3GHz-6GHz</td> <td>54.00</td> <td>Average</td> </tr> </tbody> </table>				Frequency	Limit (dB μ V/m @3m)	Value	30MHz-230MHz	40.00	Quasi-peak	230MHz-1GHz	47.00	Quasi-peak	1GHz-3GHz	70.00	Peak	1GHz-3GHz	50.00	Average	3GHz-6GHz	74.00	Peak	3GHz-6GHz	54.00	Average
Frequency	Limit (dB μ V/m @3m)	Value																							
30MHz-230MHz	40.00	Quasi-peak																							
230MHz-1GHz	47.00	Quasi-peak																							
1GHz-3GHz	70.00	Peak																							
1GHz-3GHz	50.00	Average																							
3GHz-6GHz	74.00	Peak																							
3GHz-6GHz	54.00	Average																							
Test setup:	<p>Below 1GHz:</p>  <p>Above 1GHz:</p> 																								

Test Procedure:	<p>From 30MHz to 1GHz:</p> <ol style="list-style-type: none"> 1. The radiated emissions test was conducted in a semi-anechoic chamber. 2. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation. 3. Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emissions spectrum plots of the EUT. 4. The frequencies of maximum emission were determined in the final radiated emissions measurement. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization. <p>Above 1GHz:</p> <ol style="list-style-type: none"> 1. The radiated emissions test was conducted in a fully-anechoic chamber. 2. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation. 3. Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emission spectrum plots of the EUT. 4. The frequencies of maximum emission were determined in the final radiated emissions measurement. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization.
Test environment:	Temp.: 25 °C Humid.: 52% Press.: 1 012mbar
Measurement Record:	Uncertainty: ± 4.50dB
Test Instruments:	Refer to section 6 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Data

Below 1GHz:


Test mode:	On mode	Antenna Polarity:	Horizontal
------------	---------	-------------------	------------

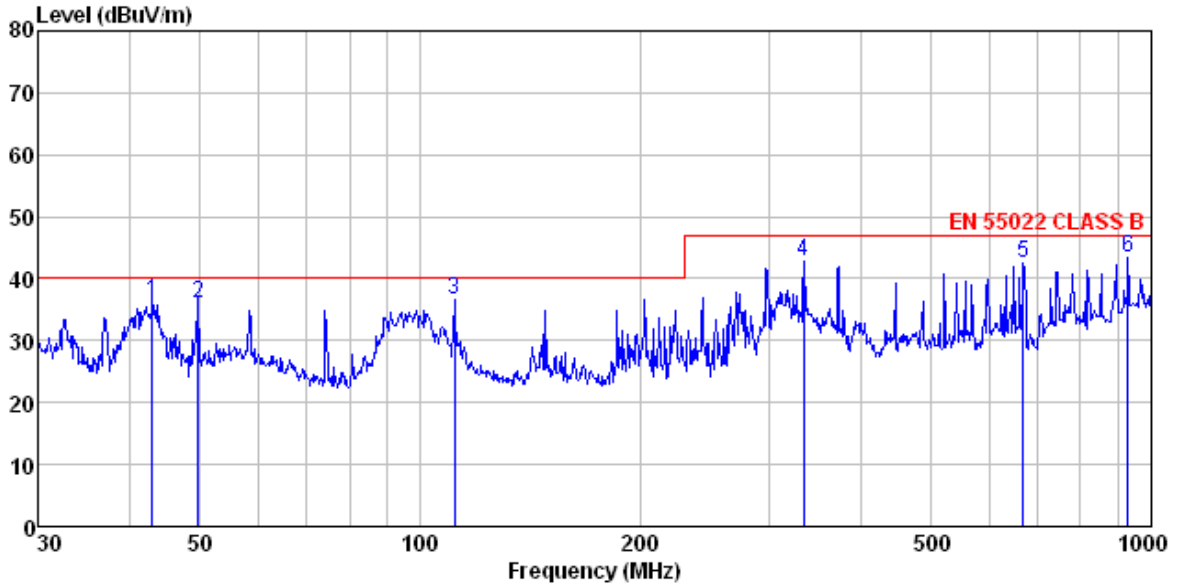

Site : 3m chamber
 Condition : EN 55022 CLASS B 3m VULB9163 -2012-05 HORIZONTAL
 Job No. : 1346AV
 Test Mode : On mode
 Test Engineer: Edward

-----	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Remark
		Level	Factor	Loss	Factor		Line	Limit	
-----	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	-----
1	43.050	51.18	16.57	0.70	32.03	36.42	40.00	-3.58	QP
2	49.707	50.89	16.38	0.77	31.96	36.08	40.00	-3.92	QP
3	111.347	52.80	14.39	1.29	31.82	36.66	40.00	-3.34	QP
4	334.859	56.17	16.19	2.54	32.07	42.83	47.00	-4.17	QP
5	668.142	48.44	21.37	3.97	31.15	42.63	47.00	-4.37	QP
6	929.008	45.54	23.99	4.96	31.20	43.29	47.00	-3.71	QP

Test mode:	On mode	Antenna Polarity:	Vertical
------------	---------	-------------------	----------

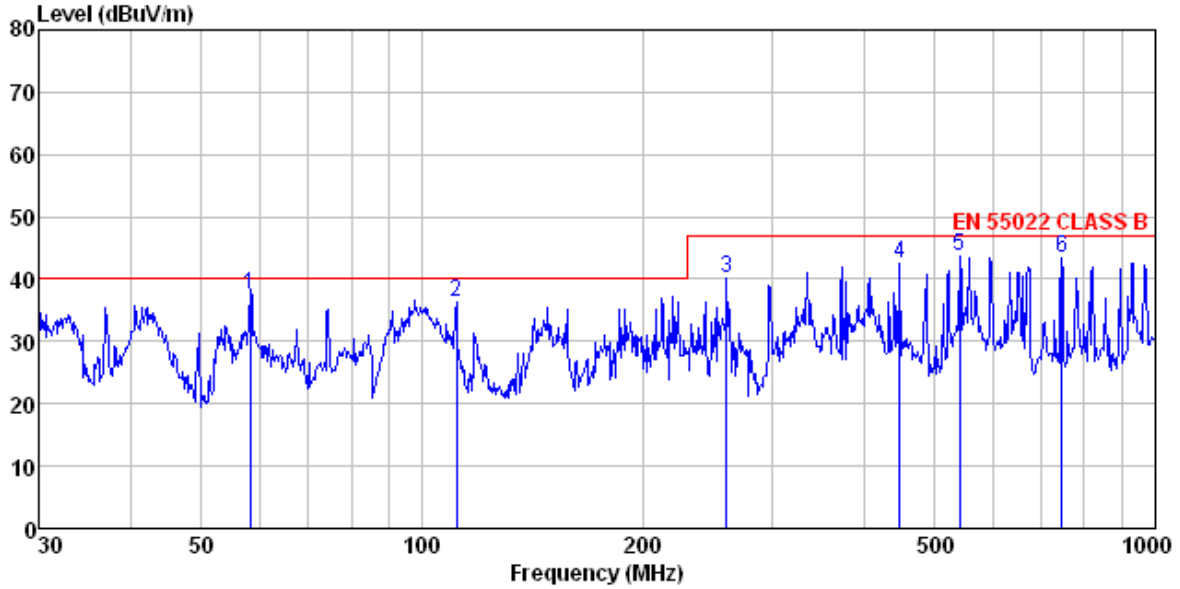


Site : 3m chamber
 Condition : EN 55022 CLASS B 3m VULB9163 -2012-05 VERTICAL
 Job No. : 1346AV
 Test Mode : On mode
 Test Engineer: Edward

	Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Line	Limit	Remark	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	58.203	52.64	15.91	0.84	31.94	37.45	40.00	-2.55 QP
2	111.347	52.51	14.39	1.29	31.82	36.37	40.00	-3.63 QP
3	260.144	54.89	15.13	2.18	32.17	40.03	47.00	-6.97 QP
4	447.982	53.68	17.58	3.08	31.72	42.62	47.00	-4.38 QP
5	541.373	52.11	19.41	3.49	31.33	43.68	47.00	-3.32 QP
6	744.866	48.01	22.39	4.26	31.25	43.41	47.00	-3.59 QP

Above 1GHz:


Test mode:	On mode	Antenna Polarity:	Horizontal
------------	---------	-------------------	------------

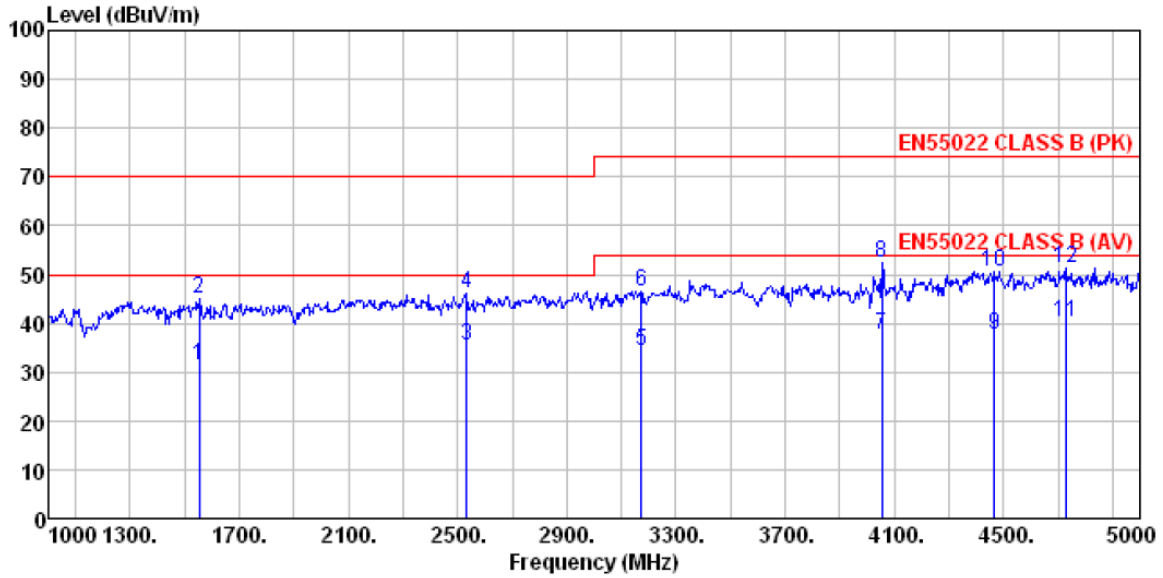

Site : 3m chamber
 Condition : EN55022 CLASS B (PK) 3m BBHA9120D ANT(>1GHZ) HORIZONTAL
 Job No. : 1346AV
 Test Mode : On mode
 Test Engineer: sky

	Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1552.000	26.63	25.08	4.71	25.08	31.34	50.00	-18.66 Average
2	1552.000	40.12	25.08	4.71	25.08	44.83	70.00	-25.17 Peak
3	2532.000	32.70	27.58	5.52	30.39	35.41	50.00	-14.59 Average
4	2532.000	43.50	27.58	5.52	30.39	46.21	70.00	-23.79 Peak
5	3172.000	28.50	28.79	6.29	29.25	34.33	54.00	-19.67 Average
6	3172.000	40.75	28.79	6.29	29.25	46.58	74.00	-27.42 Peak
7	4056.000	26.42	29.81	7.92	26.49	37.66	54.00	-16.34 Average
8	4056.000	41.29	29.81	7.92	26.49	52.53	74.00	-21.47 Peak
9	4468.000	22.62	31.26	8.31	24.69	37.50	54.00	-16.50 Average
10	4468.000	35.60	31.26	8.31	24.69	50.48	74.00	-23.52 Peak
11	4728.000	24.30	31.68	8.53	24.27	40.24	54.00	-13.76 Average
12	4728.000	35.41	31.68	8.53	24.27	51.35	74.00	-22.65 Peak

Test mode:	On mode	Antenna Polarity:	Vertical
------------	---------	-------------------	----------

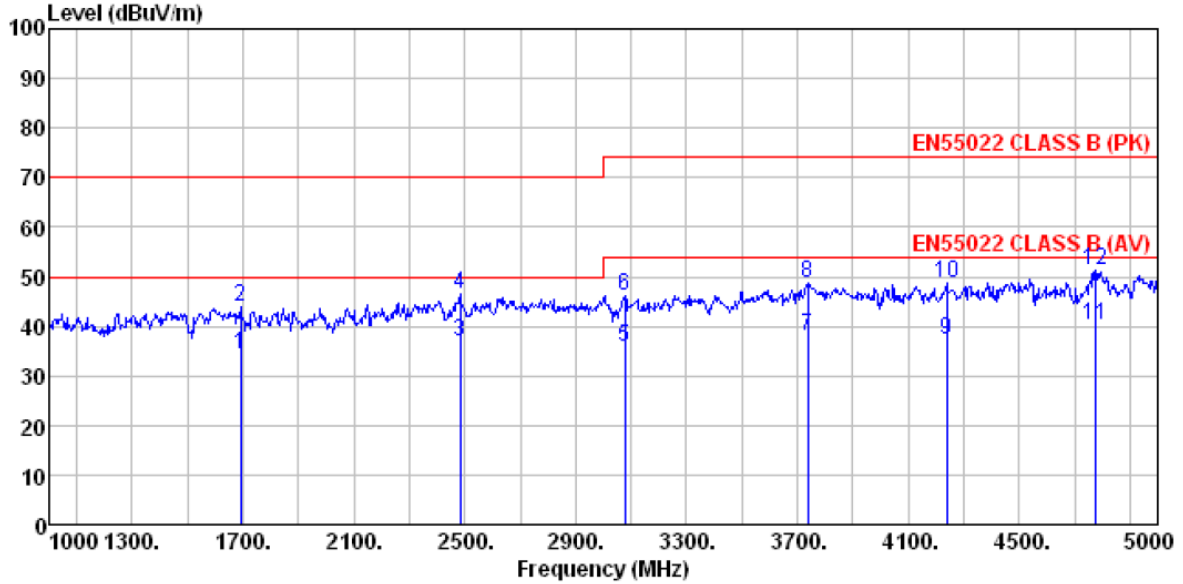

Site : 3m chamber
 Condition : EN55022 CLASS B (PK) 3m BBHA9120D ANT(>1GHZ) VERTICAL
 Job No. : 1346AV
 Test Mode : On mode
 Test Engineer: sky


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1692.000	31.80	24.96	4.80	27.31	34.25	50.00	-15.75	Average
2	1692.000	41.45	24.96	4.80	27.31	43.90	70.00	-26.10	Peak
3	2484.000	33.78	27.53	5.47	29.93	36.85	50.00	-13.15	Average
4	2484.000	43.35	27.53	5.47	29.93	46.42	70.00	-23.58	Peak
5	3076.000	30.56	28.67	6.10	29.68	35.65	54.00	-18.35	Average
6	3076.000	41.16	28.67	6.10	29.68	46.25	74.00	-27.75	Peak
7	3736.000	28.81	29.29	7.40	27.40	38.10	54.00	-15.90	Average
8	3736.000	39.43	29.29	7.40	27.40	48.72	74.00	-25.28	Peak
9	4240.000	24.27	30.38	8.10	25.57	37.18	54.00	-16.82	Average
10	4240.000	35.98	30.38	8.10	25.57	48.89	74.00	-25.11	Peak
11	4776.000	23.99	31.75	8.58	24.22	40.10	54.00	-13.90	Average
12	4776.000	35.08	31.75	8.58	24.22	51.19	74.00	-22.81	Peak

7.2 Conducted Emission

Test Requirement:	EN 55022														
Test Method:	EN 55022														
Test Frequency Range:	150kHz to 30MHz														
Class / Severity:	Class B														
Receiver setup:	RBW=9kHz, VBW=30kHz														
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* Decreases with the logarithm of the frequency.</p>	Frequency range (MHz)	Limit (dB μ V)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dB μ V)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test setup:	<p><i>Remark</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>														
Test procedure	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to EN55022 Class B on conducted measurement. 														
Test environment:	Temp.: 24 °C Humid.: 51% Press.: 1012mbar														
Measurement Record:	Uncertainty: ± 3.45 dB														
Test Instruments:	Refer to section 6 for details														
Test mode:	Refer to section 5.3 for details														
Test results:	Pass														

Measurement Data


Test mode:	On mode	Phase Polarity:	Line
------------	---------	-----------------	------

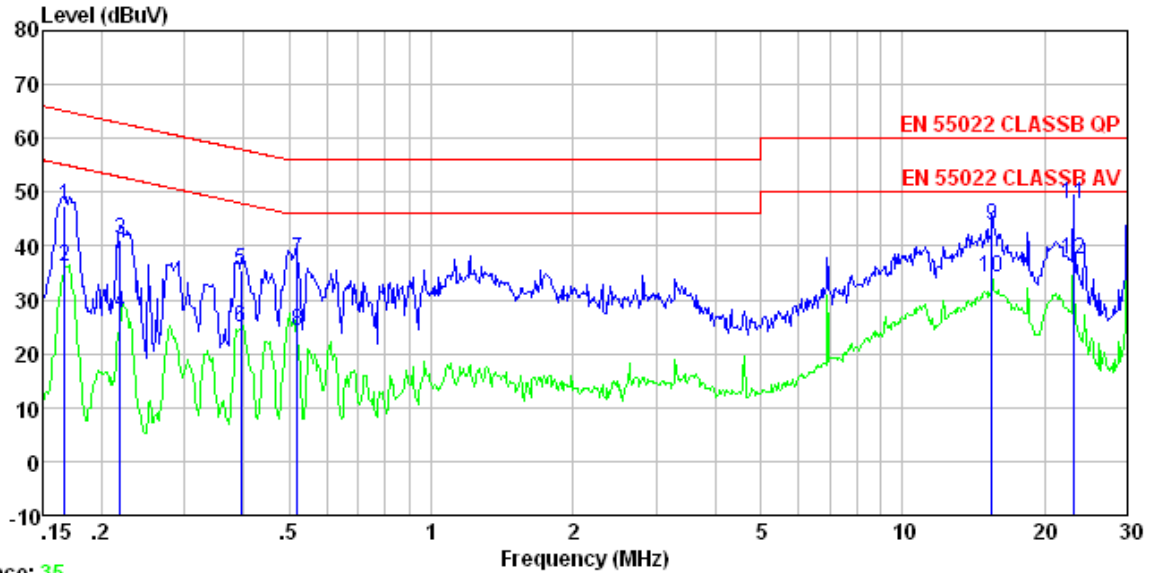

Trace: 35
 Condition : EN 55022 CLASSB QP LISN-2012 LINE
 Job No. : 1346AV
 Test Mode : on mode
 Test Engineer: Edward

	Freq	Read Level	LISN Factor	Cable Loss	Limit Level	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dB	
1	0.167	47.46	-0.26	0.10	47.30	65.12	-17.82 QP
2	0.167	36.43	-0.26	0.10	36.27	55.12	-18.85 Average
3	0.219	41.12	-0.23	0.10	40.99	62.88	-21.89 QP
4	0.219	27.81	-0.23	0.10	27.68	52.88	-25.20 Average
5	0.396	35.65	-0.22	0.10	35.53	57.95	-22.42 QP
6	0.396	24.93	-0.22	0.10	24.81	47.95	-23.14 Average
7	0.521	37.64	-0.21	0.10	37.53	56.00	-18.47 QP
8	0.521	24.45	-0.21	0.10	24.34	46.00	-21.66 Average
9	15.470	44.21	-0.52	0.20	43.89	60.00	-16.11 QP
10	15.470	34.61	-0.52	0.20	34.29	50.00	-15.71 Average
11	23.018	48.34	-0.77	0.21	47.78	60.00	-12.22 QP
12	23.018	38.04	-0.77	0.21	37.48	50.00	-12.52 Average

Test mode:	On mode	Phase Polarity:	Neutral
------------	---------	-----------------	---------

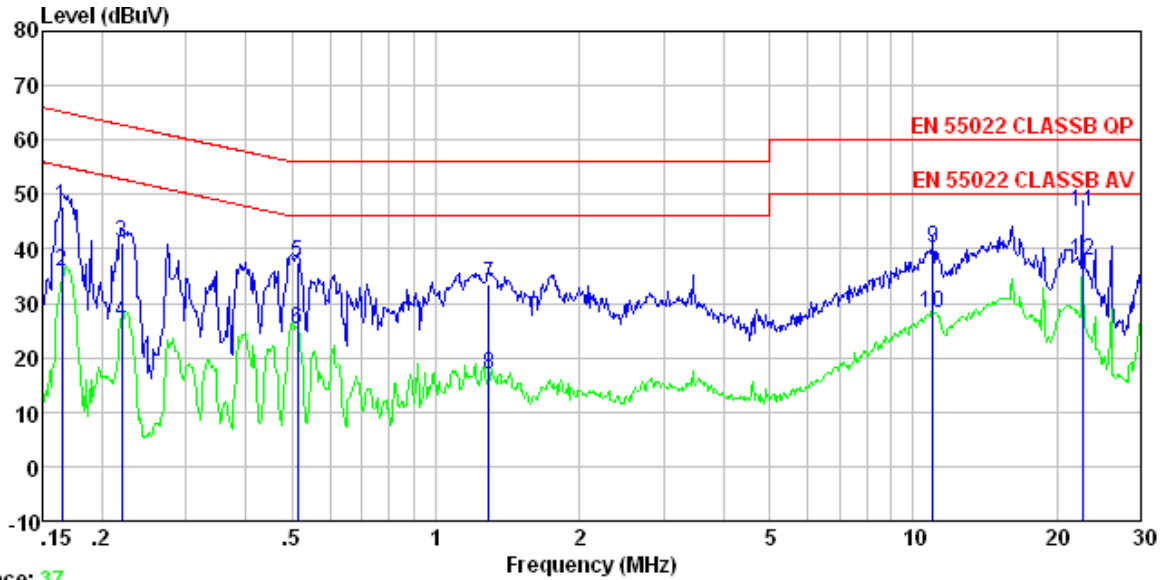

Trace: 37
 Condition : EN 55022 CLASSB QP LISN-2012 NEUTRAL
 Job No. : 1346AV
 Test Mode : on mode
 Test Engineer: Edward

	Read Freq	Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.165	47.85	-0.13	0.10	47.82	65.21	-17.39	QP
2	0.165	36.00	-0.13	0.10	35.97	55.21	-19.24	Average
3	0.220	41.25	-0.09	0.10	41.26	62.83	-21.57	QP
4	0.220	26.61	-0.09	0.10	26.62	52.83	-26.21	Average
5	0.513	37.62	-0.08	0.10	37.64	56.00	-18.36	QP
6	0.513	25.23	-0.08	0.10	25.25	46.00	-20.75	Average
7	1.289	33.56	-0.09	0.10	33.57	56.00	-22.43	QP
8	1.289	16.78	-0.09	0.10	16.79	46.00	-29.21	Average
9	11.021	40.23	-0.30	0.20	40.13	60.00	-19.87	QP
10	11.021	28.27	-0.30	0.20	28.17	50.00	-21.83	Average
11	22.655	47.32	-0.65	0.21	46.88	60.00	-13.12	QP
12	22.655	38.12	-0.65	0.21	37.68	50.00	-12.32	Average

7.3 Harmonics Test Results

Test Requirement:	EN 61000-3-2
Test Method:	N/A: See Remark Below
Remark	<p>There is no need for Harmonics test to be performed on this product (rated power is less than 75W) in accordance with EN 61000-3-2.</p> <p>For further details, please refer to Clause 7, Note 1 of EN 61000-3-2 which states:</p> <p>“For the following categories of equipment limits are not specified in this edition of the standard.</p> <p>Note 1: Equipment with a rated power of 75W or less, other than lighting equipment.”</p>

7.4 Flicker Emission

Test Requirement:	EN 61000-3-3
Test Method:	EN 61000-3-3
Class/Severity:	Clause 5 of EN 61000-3-3
Measurement Time:	10 min
Detector:	As per EN 61000-3-3
Test environment:	Temp.: 24 °C Humid.: 51% Press.: 1 012mbar
Test Instruments:	Refer to section 6 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Data


Test Item	EUT values	Limit	Result
Pst	0.028	1.00	Pass
dc [%]	0.008	3.30	Pass
dmax [%]	0.079	4.00	Pass
dt [s]	0.000	0.50	Pass

8 Immunity Test Results

8.1 Performance Criteria Description in Clause 7 of EN 55024

<p>Criterion A:</p>	<p>The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.</p>
<p>Criterion B:</p>	<p>After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.</p> <p>During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test.</p> <p>If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.</p>
<p>Criterion C:</p>	<p>Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions.</p> <p>Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.</p>

8.2 Electrostatic discharge

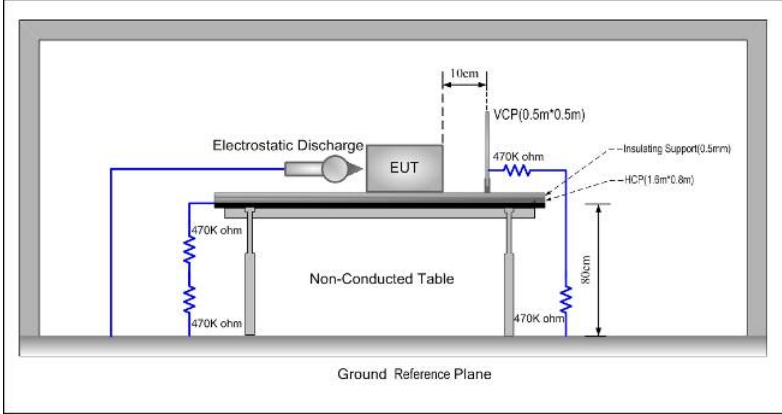Test Requirement:	EN 55024
Test Method:	EN 61000-4-2
Discharge Voltage:	Contact Discharge: $\pm 2\text{kV}$, $\pm 4\text{kV}$ Air Discharge: $\pm 2\text{kV}$, $\pm 4\text{kV}$, $\pm 8\text{kV}$ HCP/VCP: $\pm 2\text{kV}$, $\pm 4\text{kV}$
Polarity:	Positive & Negative
Number of Discharge:	Contact Discharge: Minimum 25 times at each test point, Air Discharge: Minimum 10 times at each test point.
Discharge Mode:	Single Discharge
Discharge Period:	1 second minimum
Performance Criterion:	Criterion B
Test setup:	
Test Procedure:	<p>1. Air discharge: The test was applied on non-conductive surfaces of EUT. The round discharge tip of the discharge electrode was approached as fast as possible to touch the EUT. After each discharge, the discharge electrode was removed from the EUT. The generator was re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure was repeated until all the air discharge completed</p> <p>2. Contact Discharge: The test was applied on conductive surfaces of EUT. the generator was re-triggered for a new single discharge and repeated 25 times for each pre-selected test point. the tip of the discharge electrode was touch the EUT before the discharge switch was operated.</p> <p>3. Indirect discharge for horizontal coupling plane At least 10 single discharges shall be applied at the front edge of each HCP opposite the centre point of each unit of the EUT and 0.1m from the front of the EUT. The long axis of the discharge electrode shall be in the plane of the HCP and perpendicular to its front edge during the discharge. Consideration should be given to exposing all sides of the EUT.</p> <p>4. Indirect discharge for vertical coupling plane</p>

	At least 10 single discharges were applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, was placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges were applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.
Test environment:	Temp.: 24 °C Humid.: 51% Press.: 1 012mbar
Test mode:	Refer to section 6 for details
Test Instruments:	Refer to section 5.3 for details
Test results:	Pass


Measurement Record:

Test points:	I: Metal interface, screws, video out port			
	II: All plastic seams, audio in port, audio out port, camera Lense			
Direct discharge				
Discharge Voltage (KV)	Type of discharge	Test points	Observations (Performance Criterion)	Result
± 2, ± 4	Contact	I	A	Pass
± 2, ± 4, ± 8	Air	II	A	Pass
Indirect discharge				
Discharge Voltage (KV)	Type of discharge	Test points	Observation Performance	Result
± 2, ± 4	HCP-Bottom/Top/ Front/Back/Left/Right	Edge of the HCP	A	Pass
± 2, ± 4	VCP-Front/Back /Left/Right	Center of the VCP	A	Pass

Remark:

A: No degradation in performance of the EUT was observed.

8.3 Radio-frequency electromagnetic field Amplitude modulated

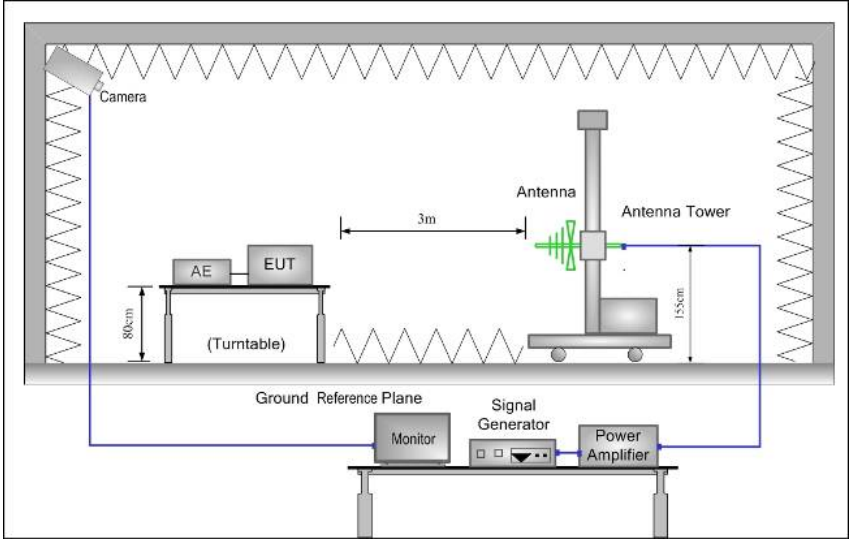Test Requirement:	EN 55024
Test Method:	EN 61000-4-3
Frequency range:	80MHz to 1GHz
Test Level:	3V/m
Modulation:	80%, 1kHz Amplitude Modulation
Performance Criterion:	Criterion A
Test setup:	
Test Procedure:	<ol style="list-style-type: none"> 1. For table-top equipment, the EUT was placed in the chamber on a non-conductive table 0.8m high. For arrangement of floor-standing equipment, the EUT was mounted on a non-conductive support 0.1m above the supporting plane. For human body-mounted equipment, the EUT may be tested in the same manner as table top items. 2. If possible, a minimum of 1 m of cable is exposed to the electromagnetic field. Excess length of cables interconnecting units of the EUT shall be bundled low-inductively in the approximate center of the cable to form a bundle 30 cm to 40 cm in length. 3. The EUT was initially placed with one face coincident with the calibration plane. The EUT face being illuminated was contained within the UFA (Uniform Field Area). 4. The frequency ranges to be considered were swept with the signal modulated and pausing to adjust the RF signal level or to switch oscillators and antennas as necessary. Where the frequency range was swept incrementally, the step size was not exceed 1 % of the preceding frequency value. 5. The dwell time of the amplitude modulated carrier at each frequency was not be less than the time necessary for the EUT to be exercised and to respond, and was not less than 0,5 s. 6. The test normally was performed with the generating antenna facing each side of the EUT. 7. The polarization of the field generated by each antenna necessitates testing each selected side twice, once with the antenna positioned

	vertically and again with the antenna positioned horizontally. 8. The EUT was performed in a configuration to actual installation conditions, a video camera and/or a audio monitor were used to monitor the performance of the EUT.
Test environment:	Temp.: 25 °C Humid.: 52% Press.: 1 012mbar
Test Instruments:	Refer to section 6 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass


Measurement Record:

Frequency	Level	Modulation	Antenna Polarization	EUT Face	Observations (Performance Criterion)	Result
80 MHz-1 GHz	3 V/m	1 kHz, 80 % Amp. Mod, 1 % increment, dwell time=3seconds	V	Front	A	Pass
			H		A	Pass
			V	Rear	A	Pass
			H		A	Pass
			V	Left	A	Pass
			H		A	Pass
			V	Right	A	Pass
			H		A	Pass
			V	Top	A	Pass
			H		A	Pass
			V	Bottom	A	Pass
			H		A	Pass

Remark:

A: No degradation in performance of the EUT was observed.

8.4 Electrical fast transients

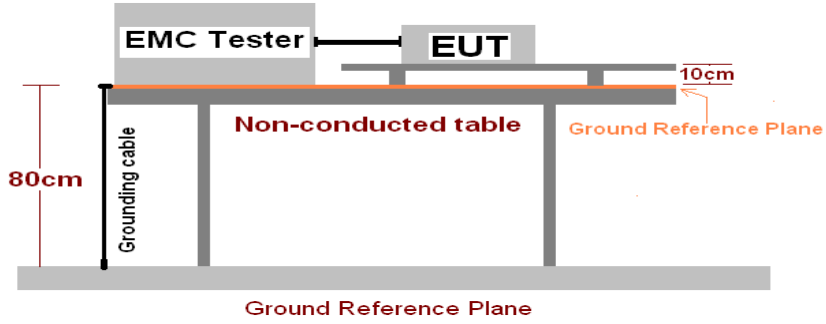Test Requirement:	EN 55024
Test Method:	EN 61000-4-4
Test Level:	1.0kV on AC port
Polarity:	Positive & Negative
Test signal specification:	Rise time=5ns, Duration time=50ns; Burst Duration=15ms, Burst Period=300ms; Repetition Frequency=5KHz
Test Duration:	2 minute per level & polarity
Performance Criterion:	Criterion B
Test setup:	 <p>The diagram illustrates the test setup. An EMC Tester and an EUT (Equipment Under Test) are placed on a non-conducted table. The table is supported by a wood support and is 80cm high. A grounding cable is connected to the table. The table is placed on a ground reference plane, which is a 1m*1m metallic sheet with a minimum thickness of 0.65mm. A 10cm gap is shown between the table and the ground plane. The ground reference plane is project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane was more than 0.5m.</p>
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT and its simulators were placed on the ground reference plane and were insulated from it by a wood support 0.1m + 0.01m thick. The ground reference plane was 1m*1m metallic sheet with 0.65mm minimum thickness. 2. This reference ground plane was project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane was more than 0.5m. 3. All cables to the EUT was placed on the wood support, cables not subject to EFT/B was routed as far as possible from the cable under test to minimize the coupling between the cables. 4. The length of the signal and power lines between the coupling device and the EUT is 0.5m 5. The EUT is connected to the power mains through a coupling device that directly couples the EFT/B interference signal. 6. Each of the Line and Neutral conductors is impressed with burst noise for 2 minutes.
Test environment:	Temp.: 26 °C Humid.: 54% Press.: 1 012mbar
Test Instruments:	Refer to section 6 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass


Measurement Record:

Lead under Test	Level (\pm kV)	Coupling Direct/Clamp	Observations (Performance Criterion)	Result
L	± 1.0	Direct	A	Pass
N	± 1.0	Direct	A	Pass
L-N	± 1.0	Direct	A	Pass

Remark:

A: No degradation in performance of the EUT was observed.

8.5 Surges

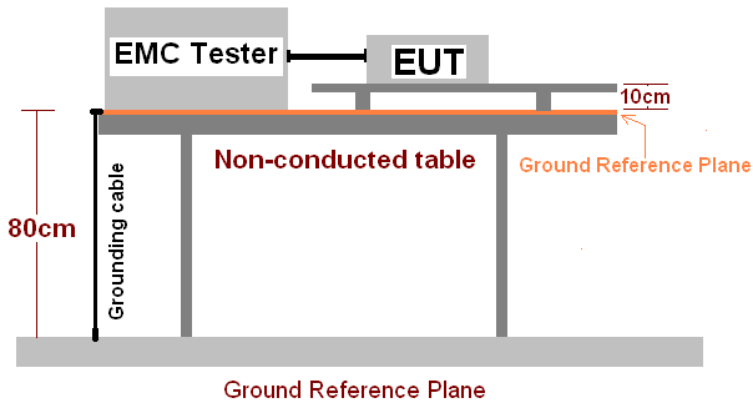Test Requirement:	EN 55024
Test Method:	EN 61000-4-5
Test Level:	1kV line to line: Differential mode
Polarity:	Positive & Negative
Generator source impedance:	2Ω (line-line coupling)
Test signal specification:	Rise time=1.2us, Duration time=50us; Test Interval: 60s between each surge;
No. of surges:	5 positive, 5 negative at 0°, 90°, 180°, 270°.
Performance Criterion:	Criterion B
Test setup:	 <p>The diagram illustrates the test setup. An EMC Tester and an EUT (Equipment Under Test) are positioned on a non-conducted table. The table is 80cm high. A ground reference plane is located 10cm above the top surface of the table. A grounding cable is connected to the base of the table. The EMC Tester and EUT are connected to each other.</p>
Test Procedure:	<ol style="list-style-type: none"> 1. For line-to-line coupling mode, provide a 1kV 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points, and for active line / neutral lines to ground are same except test level is 2kV. 2. At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are applied during test. 3. Different phase angles are done individually. 4. Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.
Test environment:	Temp.: 26 °C Humid.: 53% Press.: 1 012mbar
Test Instruments:	Refer to section 6 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass


Measurement Record:

Location	Level(kV)	Pulse No	Surge Interval	Phase(deg)	Observations (Performance Criterion)	Result
L-N	± 1	5	60s	0°	A	Pass
				90°	A	Pass
				180°	A	Pass
				270°	A	Pass

Remark:

A: No degradation in performance of the EUT was observed.

8.6 Radio-frequency continuous conducted

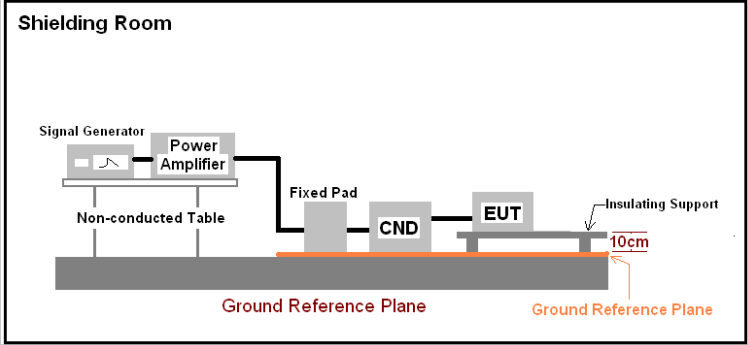Test Requirement:	EN 55024
Test Method:	EN 61000-4-6
Frequency range:	0.15MHz to 80MHz
Test Level:	3V rms on AC Ports (unmodulated emf into 150 Ω)
Modulation:	80%, 1kHz Amplitude Modulation
Performance Criterion:	Criterion A
Test setup:	
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible). 2. The disturbance signal described below is injected to EUT through CDN. 3. The EUT operates within its operational mode(s) under intended climatic conditions after power on. 4. Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.
Test environment:	Temp.: 24 °C Humid.: 51% Press.: 1 012mbar
Test Instruments:	Refer to section 6 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass


Measurement Record:

Frequency	Injected Position	Level	Modulation	Observations (Performance Criterion)	Result
150kHz to 80MHz	AC Mains	3Vrms	1 kHz, 80 % Amp. Mod, 1 % increment, dwell time=2seconds	A	Pass

Remark:

A: No degradation in performance of the EUT was observed.

8.7 Voltage dips and Voltage interruptions

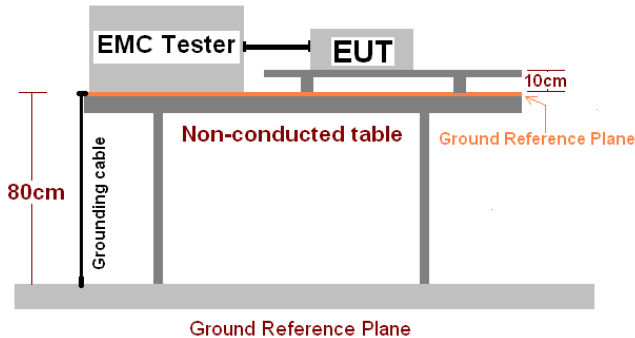Test Requirement:	EN 55024
Test Method:	EN 61000-4-11
Test Level:	0% of VT(Supply Voltage) for 0.5 period 70% of VT(Supply Voltage) for 25 period 0% of VT(Supply Voltage) for 250 period
Number of Dips / Interruptions:	3 per Level
Performance Criterion:	>95% VD, 0.5 period----Performance criterion: B 30% VD, 25 period----Performance criterion: C >95% VI, 250 period----Performance criterion: C
Test setup:	
Test Procedure:	<ol style="list-style-type: none"> The EUT and test generator were setup as shown on above setup photo. The interruptions are introduced at selected phase angles with specified duration. Record any degradation of performance.
Test environment:	Temp.: 26 °C Humid.: 53% Press.: 1 012mbar
Test Instruments:	Refer to section 6 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Record:

Test Level % U_T	Duration (Periods)	Phase angle	No. of drop out	Time between dropout	Observations (Performance Criterion)	Result
0	0.5	0°, 90°, 180°, 270°	3	10s	A	Pass
70	25	0°, 90°, 180°, 270°	3	10s	A	Pass
0	250	0°, 90°, 180°, 270°	3	10s	C	Pass


Remark:

A: No degradation in performance of the EUT was observed.

C: During the test, the EUT power off, after the experiment, the function can return to normal by the user.

9 Test Setup Photo

Radiated Emission

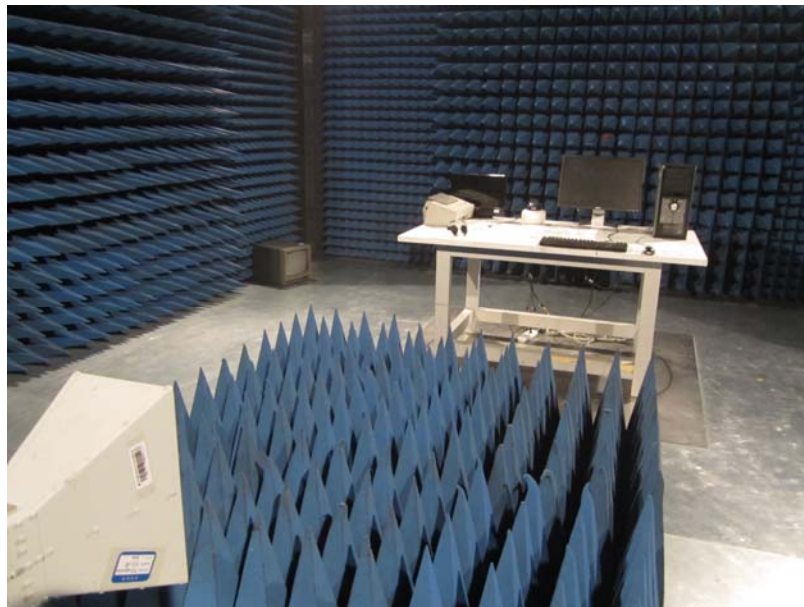

Conducted Emissions



Electrostatic discharge




Electrical fast transients/ Surges/ Voltage dips and interruptions





10 EUT Constructional Details



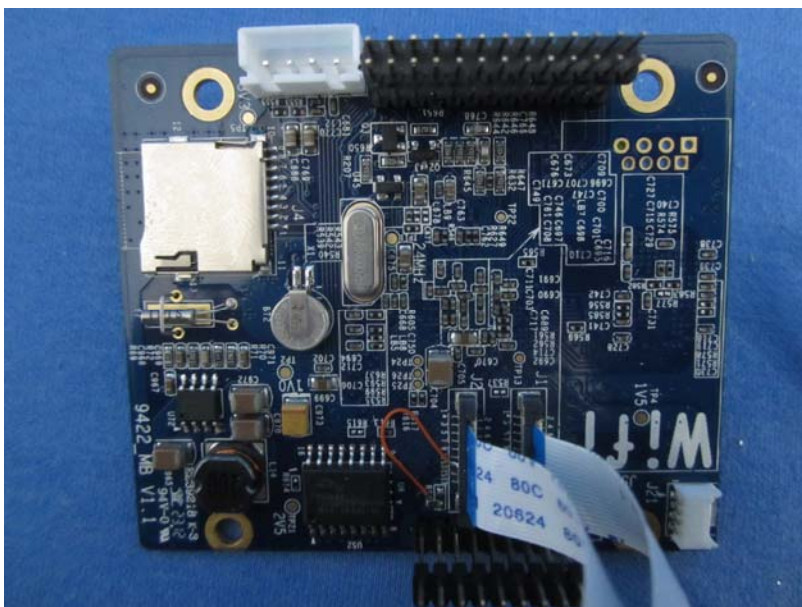



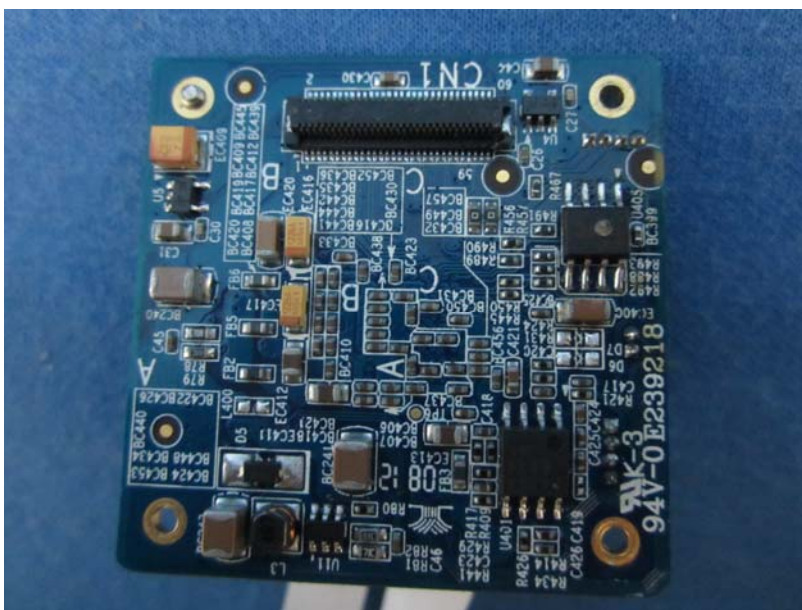

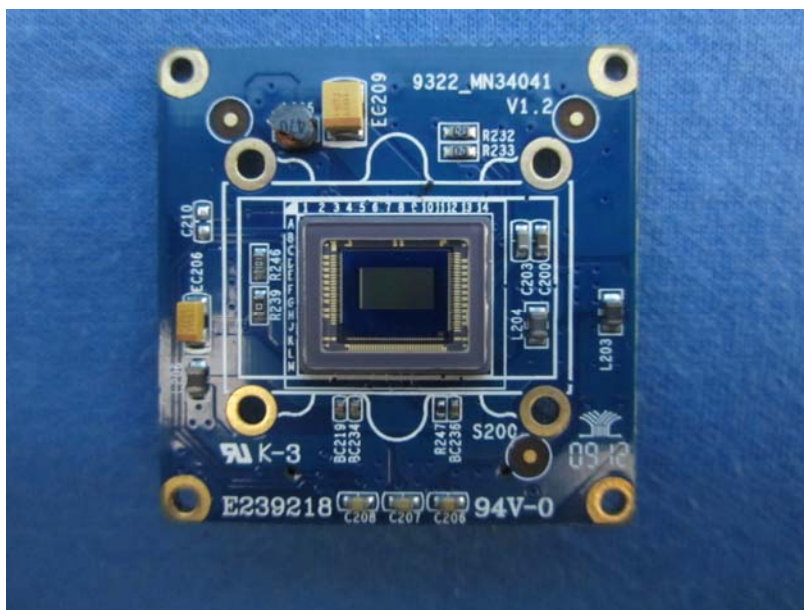

-----End-----