


Description

The conventional siren **FDESF101** offers maximum performance managed by a microprocessor, equipped with 12 LEDs, 4 different sound tones, option 0.5Hz and 1Hz, EN54-3 certified, equipped with a deep base and lockable with the siren body.

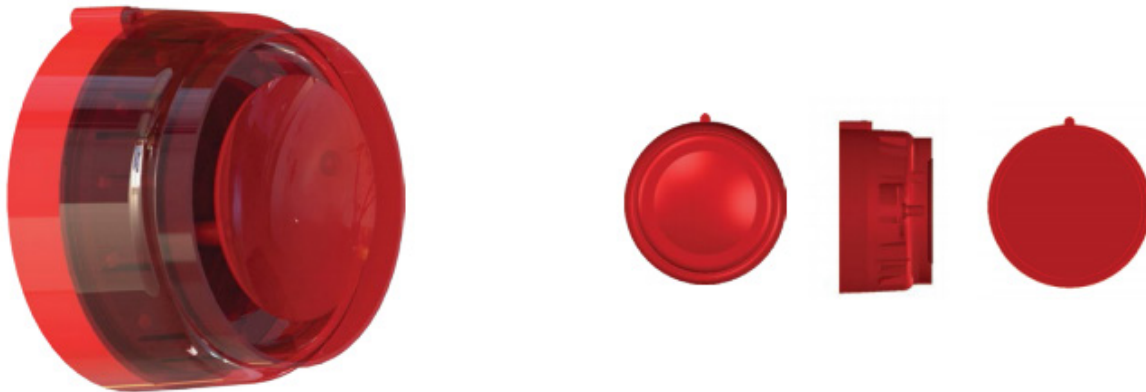

Technical Specifications

| | |
|------------------------------|---------------|
| Supply voltage | 24V DC |
| Current consumption in alarm | <30.1mA |
| Sound power | 98dB |
| Number of tones | 4 |
| Frequency range | 600-2800Hz |
| Flashing frequency | 1Hz |
| Flashing colour | red |
| Humidity | 5% -95% |
| Working temperature | -10 °C +55 °C |
| Material | ABS |
| Degree of protection | IP65 |