



Overview

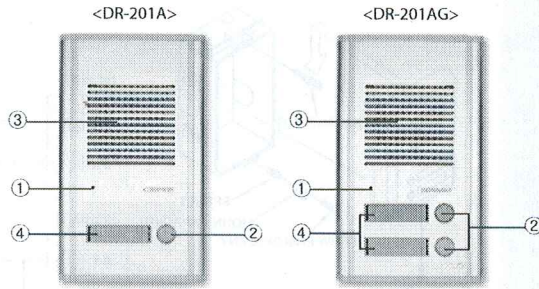


- ① Microphone : Transmits visitor's voice.(Outdoor Indoor)
- ② Call Button : Call to household.
- ③ Speaker : Transmits householder's voice.(Indoor Outdoor)
- ④ Name Tag : Name of each household.

Contents



DR-201A




DR-201AG



Manual

Wiring and Installation

1. Fix the hole of bracket with wall hole.
2. Connect Room station cables as appeared in the figure below.
3. Put the door unit inside of a back box as shown in the figure below.
4. Connect Door Release cable as appeared in the figure below.
5. Place the unit on the wall and mount with screws supplied.

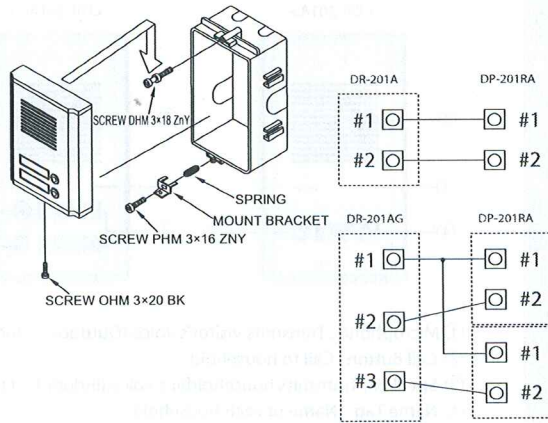

Specification

Model No.	DR-201A / 201AG
Rated voltage/Power consumption	Supplied from Room Unit
Wiring	Non polarity 2 wires
Installation	Flush mounted type
Dimension	117 X 195 X 16mm
Operating Temp.	-10°C ~ +50°C

513-11, Sangdaewon-dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, Korea
 Int'l Business Dept. : Tel.: +82-31-7393-540-550 Fax.: +82-31-745-2133
 Web site : www.commax.com
 PM13201A002D