



## SR-101 *Multi-function Smart Button Z-Wave Plus*

- Z-Wave Plus
- Built-in rechargeable battery
- Charger Voltage 5.0V (Micro USB Input)
- Integrate Light Dimming, Curtain Control, ON/Off control, Timer control
- Build in magnet to stick on any metal surface
- Color LED to indicate the Dimming Percentage
- Low power indication



### *Smart Roller Button for Lighting Control*

The SR-101 is an universal roller control button that can be installed anywhere. When using it with light control module, you can turn the light to desire degree of brightness with the roller action.

### *Roller curtain control*

Having a large curtain in your house that's difficult to operate? Install our SR-101 with our SA-103 roller shutter module. Then you can control just how much curtain will open with the smart button.






## Z-Wave Plus Technology

Unlike traditional WiFi which is prone to interference and obstacle issues. The Z-Wave plus is the best choice for smart home with its interference free frequency and MESH architecture. These technology insure reliable, energy saving, and uninterrupted connection for your smart home devices.

## AirLive SmartLife Plus APP

The SmartLife Plus APP puts everything together in your smart home. You can view the reading or video of your device. The Scene manager let you design lighting and action for each room and occasions. The Macro allow you to set "If this then that" action. It allows you to tailor made your smart home to your need.

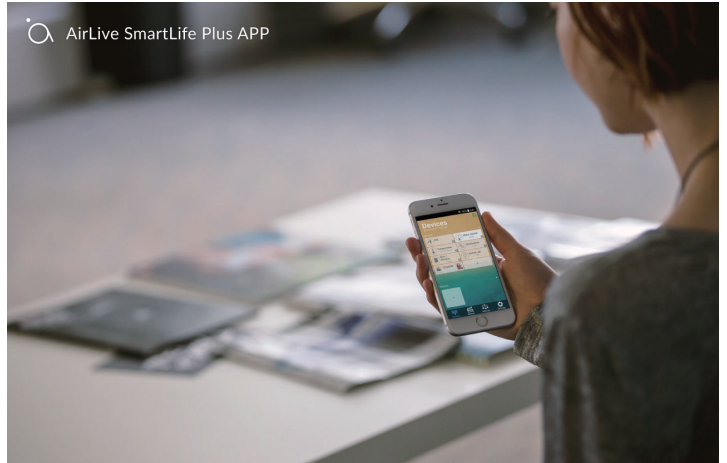

## Specifications

Model	SR-101 Multi-function Smart Button Z-Wave Plus
Z-Wave Standard	Z-wave plus
Z-Wave Frequency	CE : 868.40 MHz, 869.85 MHz
	FCC : 908.40 MHz, 916.00 MHz
Maximum transmission distance	40 M (Indoor)
Operating Voltage	3.7 V (Lithium polymer battery)
Standby Current	18 uA
Operating Current	45 mA
Lithium polymer battery	220 mAh
LED Indicator	1 LED (different colors)

## Dimension and Environment

Dimensions	Φ 71.2 X 35 (W) mm (bracket), Φ 59.7 X 14.9 mm (body)
Operating Temperature	0 ~ 40° C
Storage Temperature	95% RH max

## Ordering Information

Model	SR-101 Multi-function Smart Button Z-Wave Plus
-------	--

## Standard Package

Package Size	11.2 * 11.2 * 6.3 cm
Product Weight	0.069 kg
Package Weight	0.140 kg
Package Content	SR-101 * 1