


V-MAX BUS indoor siren



- V-MAX BUS indoor wired siren 95dB at 1 metre
- BUS connection
- Remote programming
- Different sound tone: Alarm, Fire, medical alarm and water leak alarm
- Programmable 3/5/10 minutes
- Periodic supervision signals
- Tamper protection
- EN50131 Grade 2 Certificate

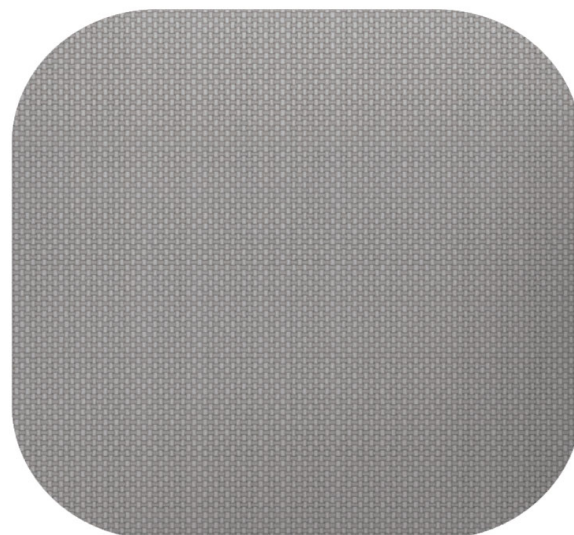

Reference / Model	VESTA-362 / SR-35-BUS
Output level of 95dB at 1 metre	
Remote programming possible	
Differentiated sounds for intrusion and fire	
Lightweight and flexible to install	
V-MAX BUS communication	
Programmable siren with 3/5/10 minute durations	
Audible notifications of arming, disarming and low battery status	
Periodic supervisory signals to verify system integrity	
Tamper protection prevents unauthorised removal and sabotage	
Low battery detection	
Power supply from control panel BUS: 12V DC	
Consumption: 2 mA (standby), 60 mA (maximum)	
Operating temperature from -10°C ~ +45°C	

VESTA-362

SR-35-BUS



V-MAX BUS indoor siren

Reference / Model	VESTA-362 / SR-35-BUS
Relative humidity up to 85% (non-condensing)	
Dimensions: 105 (W) x 105 (H) x 31 mm	
CE compliant	
EN50131 Grade 2 Certificate	