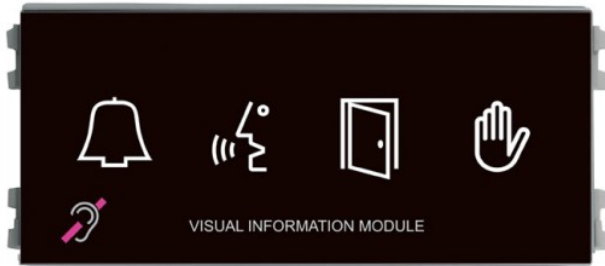


## ONE TO ONE V MODULE SKYLINE

**Reference:** 7448

The OneToOne module has 4 LED icons showing the panel status.

These icons symbolize:

- Call
- Conversation
- Door Opening
- Channel busy.

NOTE: The «Channel busy» icon is only shown in VDS systems....

### DESCRIPTION

The OneToOne module has 4 LED icons showing the panel status.

These icons symbolize:

- Call
- Conversation
- Door Opening
- Channel busy.

NOTE: The «Channel busy» icon is only shown in VDS systems.

Possibility of connection in the different FERMAX Systems.

Module for fitting to New SKYLINE Panel frame.

### TECHNICAL SPECIFICATIONS

This module is compatible with the following systems: 4+n, VDS, BUS2 and MDS Digital. The connectors' cabling will depend on the system chosen.

Model Dimensions.

- V module: 105,2x47,5 mm (width-height):

Power supply: the module has no power supply terminal and runs off the amplifier or electronic directory to which it is connected.

- In VDS Systems, the module is powered at 18 Vdc.
- In BUS2 Systems, the module is powered at 24 Vdc.
- In MDS-Digital Systems, the module is powered at 12 Vdc.
- In 4+n Systems, the module is powered at 17 Vdc.

Consumption in standby: 15 mA + 20mA active icon.

Operating temperature: -10°C to +40°C.

**Weight:** 0,1758 kg

**Size of product when packed:** 13,5x10x6 cm

**EAN 13:** 8424299074481