

EU Declaration of Conformity

SAMSUNG



We hereby declare that the product

Type of equipment : NETWORK CAMERA
Brand Name / Trade Mark : SAMSUNG
Model number : QND-7030RP
Variant Model : QND-7020RP, QND-7010RP

satisfies all the technical regulations applicable to the product within the scope of Council Directives 2014/30/EU

EN 55022:2010 : Limits and methods of measurement of radio disturbance characteristics of information technology equipment
EN 50581:2012 : Technical documentation for the assessment of electrical and electronic products with respect to the restriction of hazardous substances
EN 50130-4:2011+A1:2014 : Product family standard: Immunity requirements for components of fire, intruder and social alarm systems
EN 61000-4-2:2009 : Electrostatic discharge immunity test
EN 61000-4-3:2006+A2:2010 : Radiated, radio-frequency, electromagnetic field immunity test
EN 61000-4-4:2012 : Electrical fast transient/burst immunity test
EN 61000-4-5:2014 : Surge immunity test
EN 61000-4-6:2009 : Immunity to conducted disturbances, induced by radio-frequency fields

All essential testing suites have been carried out.

Manufacturer : Tianjin Samsung Techwin Opto-Electronic Co., Ltd.
Manufacturer address : No.11 Weiliu Rd, Micro-Electronic Industrial Park, TEDA, Tianjin, 300385, People's Republic of China
Telephone / Fax : 82-02-729-2900 / 82-02-729-2904 (www.hanwhatechwin.com)
Applicant : Hanwha Techwin Co., Ltd.
Applicant address : 1204, Changwon-daero, Seongsan-gu, Chang-won-si, Gyeongsangnam-do, Korea

This declaration is issued under the sole responsibility of the manufacturer and his authorised representative.

Authorized signatory

Name / Title : Jei Soon, Kang / Principal Research Engineer
Date of issue : May. 13, 2016

7

EMC TEST REPORT For CE

Test Report No. : KES-E1-16T0207
Date of Issue : May. 13, 2016
Product name : NETWORK CAMERA
7
Model/Type No. : QND-7030RP
Variant Model : QND-7020RP, QND-7010RP
Applicant : Hanwha Techwin Co., Ltd.
Applicant Address : 1204, Changwon-daero, Seongsan-gu, Changwon-si,
Gyeongsangnam-do, korea
Manufacturer : Tianjin Samsung Techwin Opto-Electronic Co., Ltd.
Manufacturer Address : No.11 Weiliu Rd, Micro-Electronic Industrial Park, TEDA, Tianjin,
300385, People's Republic of China
Date of Receipt : May. 02, 2016
Test date : May. 09, 2016 – May. 11, 2016
Test Results : **In Compliance** **Not in Compliance**

Tested by



Yeong Suk, Song
EMC Test Engineer

Reviewed by



Dong-Hun, Jang
EMC Technical Manager



REPORT REVISION HISTORY

Date	Test Report No.	Revision History
May. 13, 2016	KES-E1-16T0207	Issued

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd. This document may be altered or revised by KES Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KES Co., Ltd. will constitute fraud and shall nullify the document.

TABLE OF CONTENTS

1.0	General Product Description	4
1.1	Test Voltage & Frequency	7
1.2	Variant Model Differences.....	7
1.3	Device Modifications	7
1.4	Equipment Under Test.....	7
1.5	Support Equipments	7
1.6	External I/O Cabling	8
1.7	E.U.T Operating Mode(s)	8
1.8	Configuration.....	9
1.9	Calibration Details of Equipment Used for Measurement.....	10
1.10	Test Facility	10
1.11	Laboratory Accreditations and Listings	10
2.0	Test Regulations.....	11
2.1	Conducted Emissions at Mains Power Ports	13
2.2	Conducted Emissions at Telecommunication Ports	14
2.3	Radiated Electric Field Emissions(Below 1 GHz)	15
2.4	Radiated Electric Field Emissions(Above 1 GHz)	16
2.5	Harmonic Current Emissions	17
2.6	Voltage Fluctuations and Flicker	18
3.0	Criteria for compliance.....	19
3.1	Electrostatic Discharge.....	21
3.2	Radiated Electric Field Immunity	24
3.3	Electrical Fast Transients/Bursts	27
3.4	Surge Transients	30
3.5	Conducted Disturbance	33
3.6	Voltage Dips and Short Interruptions	36
APPENDIX A – TEST DATA.....		38
Conducted Emissions at Mains Power Ports.....		38
Conducted Emissions at Telecommunication Ports		40
Radiated Electric Field Emissions(Below 1 GHz)		44
Radiated Electric Field Emissions(Above 1 GHz)		45
Harmonic Current Emissions and Voltage Fluctuations and Flicker		53
Test Setup Photos and Configuration		56
Conducted Voltage Emissions		56
Conducted Telecommunication Emissions		57
Radiated Electric Field Emissions(Below 1 GHz)		59
Radiated Electric Field Emissions(Above 1 GHz)		61
Harmonic Current Emissions and Voltage Fluctuations and Flicker		63
Electrostatic Discharge		64
Radiated Electric Field Immunity		65
Electrical Fast Transients/Bursts		66
Surge Transients		68
Conducted Disturbance		69
Voltage Dips and Short Interruptions		71
EUT External Photographs		72
EUT Internal Photographs		73

1.0 General Product Description

Main Specifications of E.U.T are:

Video	
Imaging Device	1/3" 4M CMOS
Total Pixels	2720x1536
Effective Pixels	2688x1520
Scanning System	Progressive
Min. Illumination	Color : 0.3Lux, B/W : 0Lux
Lens	
Focal Length (Zoom Ratio)	Fixed 6mm (F2.2)
Max. Aperture Ratio	F2.2
Angular Field of View	D 62° / H 53° / V 31°
Min. Object Distance	-
Lens Type	Fixed
Mount Type	Board type
Pan / Tilt / Rotate	
Pan Range	0~350°
Tilt Range	0~67°
Rotate Range	0~355°
Operational	
IR Viewable Length	20m
Camera Title	Off / On (Displayed up to 20 characters per line) - W/W : English/Numeric/Special Characters - China : English/Numeric/Special/Chinese Characters - Common : Multi-line (Max 5), Color (Grey/Green/Red/Blue/Black/White), Transparency, Auto Scale by Resolution
Day & Night	True Day & Night
Backlight Compensation	Off / BLC
Wide Dynamic Range	120dB
Digital Noise Reduction	SSNR(Off / On)
Motion Detection	Off / On (4ea polygon zones)
Privacy Masking	Off / On (6ea rectangler zones)
Gain Control	Off / Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor
LDC(Lens distortion control)	On/Off (5 levels with Min/Max)
Electronic Shutter Speed	Minimum / Maximum / Anti flicker
Flip / Mirror	Flip / Mirror / Hallway view
Intelligent Video Analytics	Motion Detection with metadata, Tampering, Defocus
Alarm I/O	Input 1 / Output 1
Alarm Triggers	Motion detection, Tampering Detection, SD card error, NAS error, Alarm input, Defocus detection
Alarm Events	File upload via FTP and E-Mail Local storage recording at Event Notification via E-Mail External output

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



Network	
Ethernet	RJ-45 (10/100BASE-T)
Video Compression Format	H.265, H.264, MJPEG
Resolution	2592x1520, 2560x1440(16:9) / 2304x1296 / 1920x1080 / 1280x1024 / 1280x960 / 1280x720 / 1024x768 / 800x600 / 800x450 / 720x576 / 720x480 / 640x480 / 640x360 / 320x240
Max. Framerate	H.265 : Max 20fps at 4M, Max 30fps at 2M all resolutions H.264 : Max 20fps at 4M, Max 30fps at 2M all resolutions MJPEG : Max 15fps @ all resolution.
Smart codec	Wise Stream
Video Quality Adjustment	H.265 : Target Bitrate Level Control H.264 : Target Bitrate Level Control MJPEG : Quality Level Control
Bitrate control method	H.265 : CBR or VBR H.264 : CBR or VBR MJPEG : VBR
Streaming Capability	Multiple Streaming(Up to 3 Profiles)
Audio I/O	Built-in MIC
Audio Compression Format	G.711 u-law /G.726 Selectable G.726(ADPCM) : 8KHz, G.711 : 8KHz G.726 : 16Kbps, 24Kbps, 32Kbps, 40Kbps
Audio Communication	Uni-directional
IP	IPv4, IPv6
Protocol	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP,RTSP, NTP, HTTP, HTTPS, SSL/TSL, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour
Security	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access Log 802.1X Authentication
Streaming Method	Unicast / Multicast
Max. User Access	6 users at Unicast Mode
Edge storage	Micro SD/SDHC/SDXC Max 128G, NAS - Motion images recorded in the SD memory card can be downloaded - Manual recording at Local PC
Application Programming Interface	ONVIF Profile S, G SUNAPI(HTTP API)
Webpage Language	English, French, German, Spanish, Italian, Chinese, Korean, Russian, Japanese, Swedish, Danish, Portuguese, Turkish, Polish, Czech, Rumanian, Serbian, Dutch, Croatia, Hungary, Greek, Finnish, Norwegian
Web Viewer	Supported OS: Windows 7, 8, 10, Mac OS X 10.8, 10.9, 10.10, 10.11 [Non-plugin Webviewer] Supported Browser: Google Chrome 47, MS Edge 20 Support Codec : Video-H.264, MJPEG (Max. 1M 15fps), Audio-G.711 [Plug-in Webviewer] Supported Browser : MS Explore 11 , Mozilla Firefox 43, Apple Safari 9 * Mac OS X only

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0207
Page (6) of (76)

Central Management Software	SmartViewer
Pixel Counter	Support (plug-in viewer only)
Environmental	
Operating Temperature / Humidity	-10°C ~ +55°C / Less than 90% RH
Storage Temperature / Humidity	-30°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH
Ingress Protection	-
Vandal Resistance	-
Electrical	
Input Voltage / Current	PoE(IEEE802.3af, Class3), DC 12V
Power Consumption	Max.6.5W(PoE), Max.5.43W(DC12V)
Mechanical	
Color / Material	Ivory / Plastic
Dimension (WxHxD)	φ110xH86mm
Weight	290g

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

1.1 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage 220 Vac 230 Vac 240 Vac PoE 12 Vdc
 Frequency 50 Hz 60 Hz Hz

1.2 Variant Model Differences

Variant Model	Remarks
QND-7020RP	Focus Length differences
QND-7010RP	

1.3 Device Modifications

Not applicable

1.4 Equipment Under Test

Description	Model Number	Serial Number	Manufacturer	Remarks
NETWORK CAMERA	QND-7030RP	-	Tianjin Samsung Techwin Opto-Electronic Co., Ltd.	E.U.T

1.5 Support Equipments

Description	Model Number	Serial Number	Manufacturer	Remarks
PoE	HICC-P-2100XIRV	15030100002	Honeywell	-
Notebook	NT630Z5J	JK9091EF400142M	Samsung Electronics Suzhou Computer Co., Ltd.	-
Notebook Adapter	A13-040N2A	CN60BA4400313ADON 843K0200	Chicony Power Technology (suzhou)Co., Ltd.	-
Alarm	SIE-0001 DO	C54167JB601268 F	SAMSUNG TECHWIN CO., LTD.	-
Micro SD card	-	-	Transcend	4 GB

1.6 External I/O Cabling

- DC 12 V Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	Alarm IN	Alarm	Alarm IN	3.0	U
	RJ-45	Notebook	RJ-45	4.0	U

- PoE Mode

Start		END		Cable Spec.	
Description	I/O Port	Description	I/O Port	Length	Shield
NETWORK CAMERA (E.U.T)	Alarm IN	Alarm	Alarm IN	3.0	U
	RJ-45	PoE	RJ-45	4.0	U
PoE	RJ-45	Notebook	RJ-45	4.0	U

* Unshielded=U, Shielded=S

1.7 E.U.T Operating Mode(s)

Equipment under test was operated during the measurement under the following conditions:


Test mode	Normal operating
OP	MONITORING Network ping test

- Input power condition during the measurements was 12 V (dc) , PoE


1.8 Configuration

■ AC Main
 □ DC Main

- DC 12 V Mode

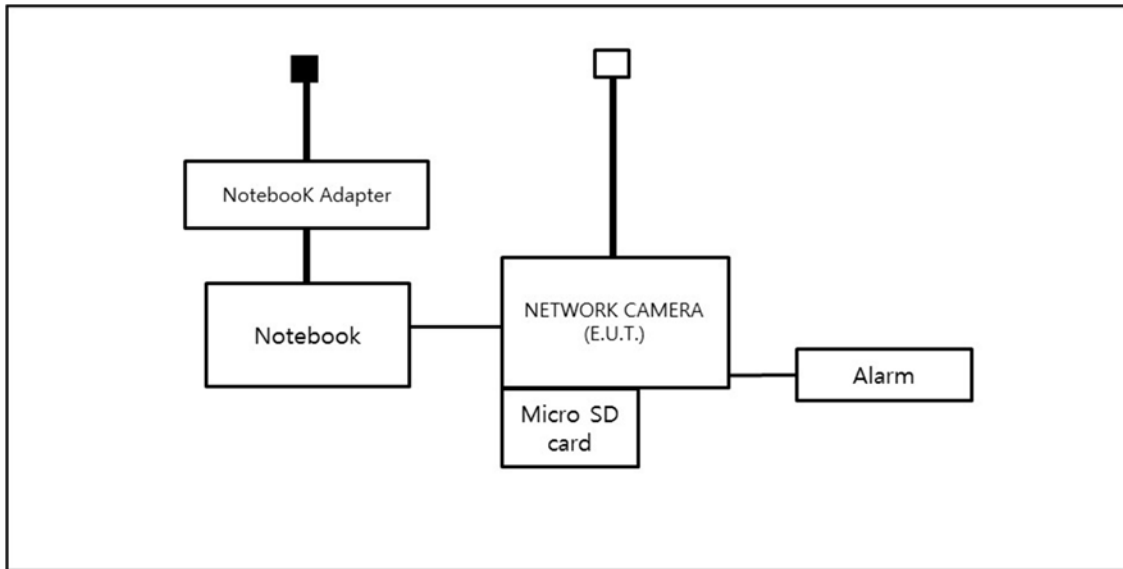

- PoE Mode

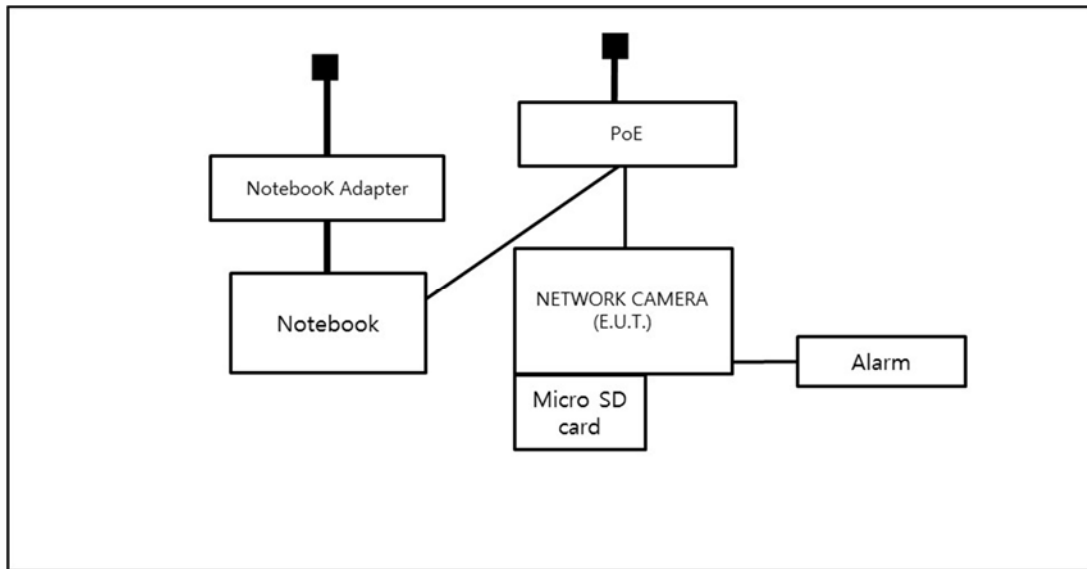

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.







1.9 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

1.10 Test Facility

The measurement facility is located at 473-29 Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea. The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22.

1.11 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3 & 10 meter Open Area Test Sites and one conducted site to perform FCC Part 15/18 measurements.	
JAPAN	VCCI	Mains Ports Conducted Interference Measurement, Telecommunication Ports Conducted Disturbance Measurement and Radiation 10 meter site, Facility for measuring radiated disturbance above 1 GHz	 R-4308, C-4798, T-2311, G-914
KOREA	MSIP	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 KR0100
Canada	IC	3 & 10 meter Open Area Test Sites and one conducted site	 4769B-1
Europe	CE	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	
International	KOLAS	EMI (10 meter Open Area Test Site and two conducted sites) Radio(3 & 10 meter Open Area Test Sites and one conducted site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	

2.0 Test Regulations

The emissions tests were performed according to following regulations:

EMC – Directive 2014/30/EU

EN 61000-6-3:2011

EN 61000-6-1:2007

EN 61000-6-4:2007 +A1:2011

EN 61000-6-2:2005

EN 55011:2007 +A1:2010

Group 1
 Class A

Group 2
 Class B

EN 55014-1:2006 +A2:2011

EN 55014-2:1997 +A2:2008

EN 55015:2013

EN 55022:2010

Class A

Class B

EN 55024:2010

EN 50130-4:2011 +A1:2014

EN 61000-3-2:2014

EN 61000-3-3:2013

EN 61326-1:2013

VCCI V-3 / 2013.04

Class A

Class B

AS / NZS CISPR22:2009 +A1:2010

Class A

Class B

47 CFR Part 15, Subpart B / ANSI C63.4-2009

Class A

Class B

IC Regulation ICES-003 : 2012
/ ANSI C63.4-2014

Class A

Class B

CISPR 22:2009 +A1:2010

Class A

Class B



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0207
Page (12) of (76)

R&TTE – Directive 1999/5/EC

EN 301 489-1 V1.9.2

- Equipment for fixed use
- Equipment for vehicular use
- Equipment for portable use

EN 301 489-3 V1.6.1

EN 301 489-17 V2.2.1

EN 60945:2002

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

2.1 Conducted Emissions at Mains Power Ports

Test Date

N/A

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input type="checkbox"/>	EMI Test Receiver	ESR3	R&S	101783	05. 03, 2017
<input type="checkbox"/>	LISN	ENV216	R&S	101137	02. 04, 2017
<input type="checkbox"/>	LISN	ENV216	R&S	101786	05. 02, 2017
<input type="checkbox"/>	Electro wave Shieldroom	-	SEMITEC	-	-

Test Conditions

Temperature: °C
 Relative Humidity: %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- PASS
- NOT PASS
- NOT APPLICABLE

Remarks

Because the E.U.T power is 12 V (dc) power and PoE, limits are not specified

2.2 Conducted Emissions at Telecommunication Ports

Test Date

May. 09, 2016

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test Receiver	ESR3	R&S	101783	05. 03, 2017
<input checked="" type="checkbox"/>	LISN	ENV216	R&S	101137	02. 04, 2017
<input checked="" type="checkbox"/>	LISN	ENV216	R&S	101786	05. 02, 2017
<input checked="" type="checkbox"/>	8-Wire ISN CAT3	CAT3 8158	Schwarzbeck Mess	8158-0019	04. 01, 2017
<input checked="" type="checkbox"/>	8-Wire ISN CAT5	CAT5 8158	Schwarzbeck Mess	8158-0030	04. 01, 2017
<input checked="" type="checkbox"/>	8-Wire ISN CAT6	NTFM 8158	Schwarzbeck Mess	8158-0029	08. 14, 2016
<input checked="" type="checkbox"/>	Electro wave Shieldroom	-	SEMITEC	-	-

Test Conditions

Temperature: 25,7 °C

Relative Humidity: 39,7 %

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

- PASS
- NOT PASS
- NOT APPLICABLE

Remarks

See Appendix A for test data.

2.3 Radiated Electric Field Emissions(Below 1 GHz)

Test Date

May. 09, 2016

Test Location Open Area Test Site #1 Open Area Test Site #2**Test Equipment**

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test Receiver	ESR3	R&S	101781	05. 03, 2017
<input checked="" type="checkbox"/>	Trilog-Broadband Antenna	VULB 9163	SCHWARZBECK	9168-713	05. 15, 2017
<input checked="" type="checkbox"/>	Open Area Test Site	-	KES	-	-
<input checked="" type="checkbox"/>	Antenna Mast	-	DAEIL EMC	-	-
<input checked="" type="checkbox"/>	Turn Table	-	DAEIL EMC	-	-

Test ConditionsTemperature: 27,4 °C
Relative Humidity: 28,0 %**Frequency Range of Measurement**

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results

The requirements are:

- PASS
 NOT PASS
 NOT APPLICABLE

RemarksSee Appendix A for test data.

2.4 Radiated Electric Field Emissions(Above 1 GHz)

Test Date

May. 09, 2016

Test Location

Semi Anchoic Chamber #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	EMI Test Receiver	ESU26	R&S	100551	04. 18, 2017
<input checked="" type="checkbox"/>	Broadband Coaxial Preamplifier	BBV 9718	Schwarzbeck Mess - Elektronik	9718-246	10, 23, 2016
<input checked="" type="checkbox"/>	DOUBLE RIDGED HORN ANTENNA	SAS-571	A.H.SYSTEM,INC	781	05, 07, 2017
<input checked="" type="checkbox"/>	Semi Anchoic Chamber #2	-	SEMITEC	-	-
<input checked="" type="checkbox"/>	Antenna Mast	-	AUDIX	-	-
<input checked="" type="checkbox"/>	Turn Table	-	AUDIX	-	-

Test Conditions

Temperature: 25,7 °C
Relative Humidity: 39,7 %

Frequency Range of Measurement

1 GHz to 6 GHz

Instrument Settings

IF Band Width: 1 MHz

Test Results

The requirements are:

- PASS
 NOT PASS
 NOT APPLICABLE

Remarks

See Appendix A for test data.

2.5 Harmonic Current Emissions

Test Date

N/A

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input type="checkbox"/>	AC Source	ACS 500 N	EM TEST	V1024106760	08, 13, 2016
<input type="checkbox"/>	Digital Power Analyzer	DPA 500 N	EM TEST	V1024106759	08, 13, 2016

Test ConditionsTemperature: °C
Relative Humidity: %**Classification of Equipment for Harmonic Current Emissions**

- Class A
- Class B
- Class C(Below 25 W)
- Class C(Above 25 W)
- Class D

Test Results

The requirements are:

- PASS
- NOT PASS
- NOT APPLICABLE

Remarks

Because the E.U.T power is less than 75 W, limits are not specified.



2.6 Voltage Fluctuations and Flicker

Test Date

N/A

Test Location

Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input type="checkbox"/>	AC Source	ACS 500 N	EM test	V1024106760	08, 13, 2016
<input type="checkbox"/>	Digital Power Analyzer	DPA 500 N	EM test	V1024106759	08, 13, 2016

Test Conditions

Temperature: °C
Relative Humidity: %

Test Results

The requirements are:

- PASS
- NOT PASS
- NOT APPLICABLE

Remarks

Because the E.U.T power is 12 V (dc) power and PoE.

3.0 Criteria for compliance

Criteria for compliance was based on the following guidelines:
EN 50130-4:2011 +A1:2014 Alarm systems-Part 4: Electromagnetic compatibility Product family standard: Immunity requirements for components of fire, intruder and social alarm systems

The variety and the diversity of the apparatus within the scope of this document makes it difficult to define precise criteria for the evaluation of the immunity test results.

If as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe then the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance by the manufacture and noted in the test report, based on the following criteria:

Electrostatic discharge

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing that is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Radiated electromagnetic fields

There shall be no damage, malfunction or change of status due to the conditioning.
Flickering of an indicator during the application of discharge is permissible, providing which could be interpreted by associated equipment as a change, and no such
Flickering of indicators occurs at a field strength of 3 V/m.
For components of CCTV systems, where the picture is allowed at 10 V/m, providing.
(a) there is no permanent damage or change to EUT
(e.g. no corruption of memory or changes to programmable setting etc.)
(b) at 3 V/m, any deterioration of the picture is so minor that the system could still be used; and
(c) there is no observable deterioration of the picture at 1 V/m.

Fast transient burst / slow high energy voltage surge

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing

That there is no residual is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change.

Conducted RF immunity

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the application of discharge is permissible, providing

That there is no residual is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment as a change, and no such flickering of indicators oeuvres at $U = 130 \text{ dB}\mu\text{V}$.

For component of CCTV systems, where the status is monitored by observing the TV picture, then deterioration of the picture is allowed at $U = 140 \text{ dB}\mu\text{V}$, providing:

(a) there is no permanent damage or change to the EUT

(e.g. no corruption of memory or changes to programmable settings etc.)

(b) at $U = 130 \text{ dB}\mu\text{V}$, any deterioration of the picture is so minor that the system could still be used; and

(c) there in no observable deterioration of the picture at $U = 120 \text{ dB}\mu\text{V}$.

Voltage dip/interruption / Voltage variation

There shall be no damage, malfunction or change of status due to the conditioning.

Flickering of an indicator during the conditioning is permissible, providing that there is no residual change in the EUT or any change in outputs, which could be interpreted by associated equipment

as a change. The EUT shall meet the acceptance criteria for the functional test, after the conditioning.

3.1 Electrostatic Discharge

Reference Standard

EN 61000-4-2:2009

Test Date

May. 10, 2016

Test Location

EMS-ESD: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	ESD SIMULATOR	ESS-2000	Noise Ken	ESS05X4620	02. 24, 2017
<input checked="" type="checkbox"/>	HCP	-	Noise Ken	-	-
<input checked="" type="checkbox"/>	VCP	-	Noise Ken	-	-

Test Conditions

Temperature: 23,8 °C
Relative Humidity: 49,2 %
Atmospheric Pressure: 98,9 kPa

Test Specifications

Discharge Factor: ≥ 1 s

Discharge Impedance: 330 ohm / 150 pF

Kind of Discharge: Air, Contact (direct and indirect)

Polarity: Positive and Negative

Number of Discharge: 10 at all locations for Air discharge
10 at all locations for Contact discharge

Discharge Voltage:	Contact	Air	HCP	VCP
	<input type="checkbox"/> 2 kV	<input checked="" type="checkbox"/> 2 kV	<input type="checkbox"/> 2 kV	<input type="checkbox"/> 2 kV
	<input type="checkbox"/> 4 kV	<input checked="" type="checkbox"/> 4 kV	<input type="checkbox"/> 4 kV	<input type="checkbox"/> 4 kV
	<input checked="" type="checkbox"/> 6 kV	<input type="checkbox"/> 6 kV	<input checked="" type="checkbox"/> 6 kV	<input checked="" type="checkbox"/> 6 kV
	<input type="checkbox"/> 8 kV	<input checked="" type="checkbox"/> 8 kV	<input type="checkbox"/> 8 kV	<input type="checkbox"/> 8 kV
	<input type="checkbox"/> 15 kV	<input type="checkbox"/> 15 kV	<input type="checkbox"/> 15 kV	<input type="checkbox"/> 15 kV



Notes: HCP: Horizontal coupling plane
VCP: Vertical coupling plane

Required Performance Criteria: Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Location of Discharge:

- DC 12V, PoE Mode

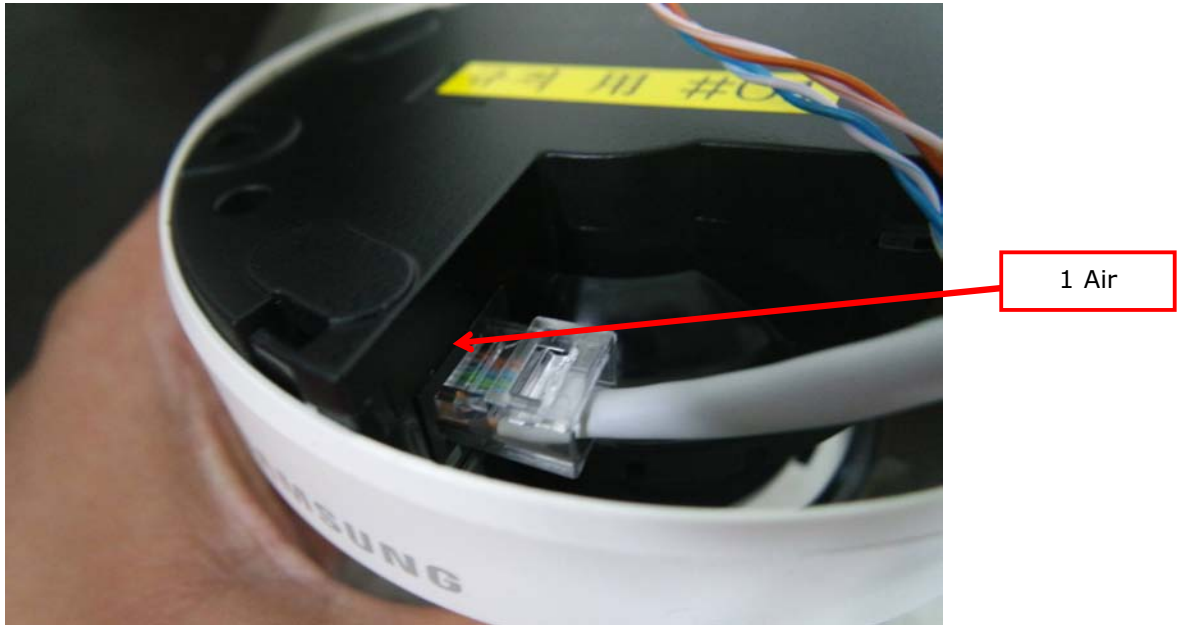

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



Test Data

- DC 12 V Mode

Indirect Discharge

No.	Test Point	Discharge Method	Performance	Remarks
			Observation	
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Performance	Remarks
			Observation	
1	Port	Air Discharge	Complied	-

- PoE Mode

Indirect Discharge

No.	Test Point	Discharge Method	Performance	Remarks
			Observation	
1	HCP Contact	Contact Discharge	Complied	-
2	VCP Contact	Contact Discharge	Complied	-

Direct Discharge

No.	Test Point	Discharge Method	Performance	Remarks
			Observation	
1	Port	Air Discharge	Complied	-

Note: "Blank" = Not performed

Observations:

Complied - No degradation of function

Test Results

- PASS Required Performance Criteria
- NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.

3.2 Radiated Electric Field Immunity

Reference Standard

EN 61000-4-3:2006 +A2:2010

Test Date

May. 10, 2016

Test Location

EMS-RS: Semi Anchoic Chamber #1 Semi Anchoic Chamber #2

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	SIGNAL GENERATOR	SMB 100A	R&S	108252	08. 13, 2016
<input checked="" type="checkbox"/>	BROADBAND AMPLIFIER	BBA100	R&S	101239	08. 13, 2016
<input checked="" type="checkbox"/>	BROADBAND AMPLIFIER	100S1G6M1	AR	579931	08. 13, 2016
<input checked="" type="checkbox"/>	POWER METER	NRP2	R&S	103475	08. 13, 2016
<input checked="" type="checkbox"/>	AVG POWER SENSOR	NRP-Z91	R&S	102526	08. 13, 2016
<input checked="" type="checkbox"/>	AVG POWER SENSOR	NRP-Z91	R&S	102527	08. 13, 2016
<input checked="" type="checkbox"/>	Stacked Log.-Per.Antenna	STLP 9128 D	Schwarzbeck	9128D038	-
<input checked="" type="checkbox"/>	Semi Anchoic Chamber #2		SEMITEC	-	-



Test Conditions

Temperature: 23,7 °C
Relative Humidity: 49,2 %
Atmospheric Pressure: 98,9 kPa

Test Specifications

Antenna Polarization: Horizontal & vertical unless indicated otherwise

Antenna Distance: 3 m

Field Strength: 1 V/m 3 V/m
 10 V/m

Frequency Range: 80 MHz to 1 GHz 1,4 GHz to 2,7 GHz
 80 MHz to 2,7 GHz

Modulation: AM, 80 %, 1 kHz sine wave
 PM, 1 Hz (0,5 s ON : 0,5 s OFF)

Frequency step: 1 % step

Dwell Time: 1 s 3 s

of Sides Radiated: 4

Required Performance Criteria: Complied

Test Data

- DC 12 V Mode

Side Exposed	Observation	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0207
Page (26) of (76)

- PoE Mode

Side Exposed	Observation	
	Horizontal	Vertical
Front	Complied	Complied
Right	Complied	Complied
Back	Complied	Complied
Left	Complied	Complied

Note: "Blank" = Not performed

Observations:

Complied - No degradation of function

Test Results

- PASS Required Performance Criteria
- NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test Data

- DC 12 V Mode

Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	OBSERVATIONS	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	OBSERVATIONS	
	(+) Burst (kV)	(-) Burst (kV)
L – N	Complied	Complied

Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	OBSERVATIONS	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45	Complied	Complied
Alarm	Complied	Complied

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- PoE Mode

Input a.c. power ports – Coupling/Decoupling Network used

Mode of Application	OBSERVATIONS	
	(+) Burst (kV)	(-) Burst (kV)
L – N – PE	Complied	Complied

Input d.c. power ports – Coupling/Decoupling Network used

Mode of Application	OBSERVATIONS	
	(+) Burst (kV)	(-) Burst (kV)
-	-	-

Signal ports and telecommunication ports – Coupling Clamp used

Mode of Application	OBSERVATIONS	
	(+) Burst (kV)	(-) Burst (kV)
RJ-45	Complied	Complied
Alarm	Complied	Complied

Note: "Blank" = Not performed

Observations:
 Complied – No degradation of function

Test Results

- PASS Required Performance Criteria
- NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.

3.4 Surge Transients

Reference Standard

EN 61000-4-5:2014

Test Date

Apr. 20, 2016

Test Location

EMS-Surge: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	Ultra Compact Simulator	UCS 500 N5	EM TEST	V0936105120	07. 14, 2016
<input checked="" type="checkbox"/>	MotorVariac	MV2616	EM TEST	V0936105123	07. 14, 2016
<input checked="" type="checkbox"/>	CDN	CNV 504N	EM TEST	P1530162238	04. 01, 2016

Test Conditions

Temperature: 22,7 °C
Relative Humidity: 47,0 %
Atmospheric Pressure: 99,1 kPa

Test Specifications

Power Lines

Source Impedance: 12 ohm for common mode and 2 ohm for differential mode

Surge Amplitude :

Common Mode
 (0,5 / 1,0 / 2,0) kV
Differential Mode
 (0,5 / 1,0) kV
Signal lines
 (0,5 / 1,0) kV

Number of Surges:

5 surges per angle

Angle:

0°, 90°, 180°, 270° (input a.c. power port)

Polarity:

Positive & Negative

Repetition Rate:

1 surge per min 1 surge per 30 sec.

Required Performance Criteria: Complied



Signal Lines

Source Impedance: 42 ohm for common mode
Surge Amplitude: Common Mode
 (0,5 / 1,0) kV

Number of Surges: 5 Surges

Polarity: Positive & Negative

Repetition Rate: 1 surge per min 1 surge per 30 sec.

Required Performance Criteria: Complied

Test Data

- DC 12 V Mode

Line to Line – Differential Mode

Mode of Application	OBSERVATIONS	
	(+) Surge (kV)	(-) Surge (kV)
-	-	-

Line to Earth – Common Mode

Mode of Application	OBSERVATIONS	
	(+) Surge (kV)	(-) Surge (kV)
-	-	-

Signal Lines

Line to Earth – Common Mode

Mode of Application	OBSERVATIONS	
	(+) Surge (kV)	(-) Surge (kV)
RJ-45	Complied	Complied
Alarm	Complied	Complied



- PoE Mode

Line to Line – Differential Mode

Mode of Application	OBSERVATIONS	
	(+) Surge (kV)	(-) Surge (kV)
-	-	-

Line to Earth – Common Mode

Mode of Application	OBSERVATIONS	
	(+) Surge (kV)	(-) Surge (kV)
-	-	-

Signal Lines

Line to Earth – Common Mode

Mode of Application	OBSERVATIONS	
	(+) Surge (kV)	(-) Surge (kV)
RJ-45(PoE)	Complied	Complied
Alarm	Complied	Complied

Note: "Blank" = Not performed

Observations:
Complied – No degradation of function

Test Results

- PASS Required Performance Criteria
- NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.

3.5 Conducted Disturbance

Reference Standard

EN 61000-4-6:2009

Test Date

May. 11, 2016

Test Location

EMS-CS: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input checked="" type="checkbox"/>	Continuous Wave Generator	CWS 500N1	EM TEST	V0936105119	09. 25, 2016
<input checked="" type="checkbox"/>	6dB Attenuator	ATT6	EM TEST	1208-34	08. 13, 2016
<input checked="" type="checkbox"/>	CDN	CDN-M2/M3N	EM TEST	0909-06	08. 13, 2016
<input type="checkbox"/>	CDN	CDN-T2-RJ11	EM TEST	0909-07	08. 13, 2016
<input type="checkbox"/>	CDN	CDN-T4	EM TEST	0909-08	08. 13, 2016
<input type="checkbox"/>	CDN	CDN-T8RJ45	EM TEST	0909-09	08. 13, 2016
<input type="checkbox"/>	CDN	CDN-AF2	EM TEST	0909-10	08. 13, 2016
<input type="checkbox"/>	CDN	CDN-AF4	EM TEST	0909-11	08. 13, 2016
<input checked="" type="checkbox"/>	EM Injection Clamp	EM 101	Liithi	35943	02. 11, 2016

Test Conditions

Temperature: 22,7 °C
Relative Humidity: 47,0 %
Atmospheric Pressure: 99,1 kPa



Test Specifications

- Frequency range: 150 kHz to 100 MHz 10 kHz to 30 MHz
 150 kHz to 230 MHz 10 kHz to 100 MHz
- Voltage Level: 1 Vrms 3 Vrms
 10 Vrms
- Modulation: AM, 80 %, 1 kHz sine wave
 PM, 1 Hz (0,5 s ON : 0,5 s OFF)
- Frequency step: 1 % step
- Dwell Time: 1 s 3 s
- Required Performance Criteria: Complied

Test Data

- DC 12 V Mode

Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observation
-	CDN (<input type="checkbox"/> M2, <input type="checkbox"/> M3)	-

Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observation
L - N	CDN (<input checked="" type="checkbox"/> M2, <input type="checkbox"/> M3)	Complied

Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observation
RJ-45	EM Injection Clamp	Complied
Alarm	EM Injection Clamp	Complied

- PoE Mode

Input a.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observation
-	CDN (<input type="checkbox"/> M2, <input type="checkbox"/> M3)	-

Input d.c. power ports

Coupling Location (Line Stressed)	Coupling Method	Observation
-	CDN (<input type="checkbox"/> M2, <input type="checkbox"/> M3)	-

Signal ports and telecommunication ports

Coupling Location (Line Stressed)	Coupling Method	Observation
RJ-45(PoE)	EM Injection Clamp	Complied
Alarm	EM Injection Clamp	Complied

Notes: CDN = Coupling Decoupling Network
 EMC = Electro Magnetic Clamp
 "blank" = Not performed

Observations:
 Complied – No degradation of function

Test Results

- PASS Required Performance Criteria
- NOT PASS Required Performance Criteria

Remarks

PASS Required Performance Criteria.



3.6 Voltage Dips and Short Interruptions

Reference Standard

EN 61000-4-6:2009

Test Date

N/A

Test Location

EMS-Voltage dip: Electro wave Shieldroom

Test Equipment

Used	Description	Model Number	Manufacturer	Serial Number	Cal. Due
<input type="checkbox"/>	Ultra Compact Simulator	UCS 500 N5	EM TEST	V0936105120	07. 14, 2016
<input type="checkbox"/>	MotorVariac	MV2616	EM TEST	V0936105123	07. 14, 2016

Test Conditions

Temperature: °C
Relative Humidity: %
Atmospheric Pressure: kPa



Test Specifications & Observations/Remarks

Test Level	Duration [in period/ms (50 Hz)]	Results
<input type="checkbox"/> 20 % dip	<input type="checkbox"/> 250 /10	_____
<input type="checkbox"/> 30 % dip	<input type="checkbox"/> 25 /10	_____
<input type="checkbox"/> 60 % dip	<input type="checkbox"/> 10 /10	_____
<input type="checkbox"/> 100 % dip	<input type="checkbox"/> 250 /10	_____

- Voltage variations

<input type="checkbox"/> Unom + 10 %	<input type="checkbox"/> 253 V (ac)	_____
<input type="checkbox"/> Unom - 15 %	<input type="checkbox"/> 195.5 V (ac)	_____

Observations:

- A - No response observed from E.U.T
- B - Unit shuts down then automatically restarts when full voltage is restored.
- C - Unit shuts down then manually restarts when full voltage is restored or Loss of function.

Test Results

- PASS Required Performance Criteria
- NOT PASS Required Performance Criteria
- NOT APPLICABLE

Remarks

Because the E.U.T power is 12 V (dc) power and PoE.



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0207
Page (38) of (76)

APPENDIX A – TEST DATA

Conducted Emissions at Mains Power Ports

[HOT]

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0207
Page (39) of (76)

[NEUTRAL]

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


Conducted Emissions at Telecommunication Ports

- DC 12 V Mode

[10 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	QND-7030RP
Mode	DC-10M-CE
Operator Name:	KES

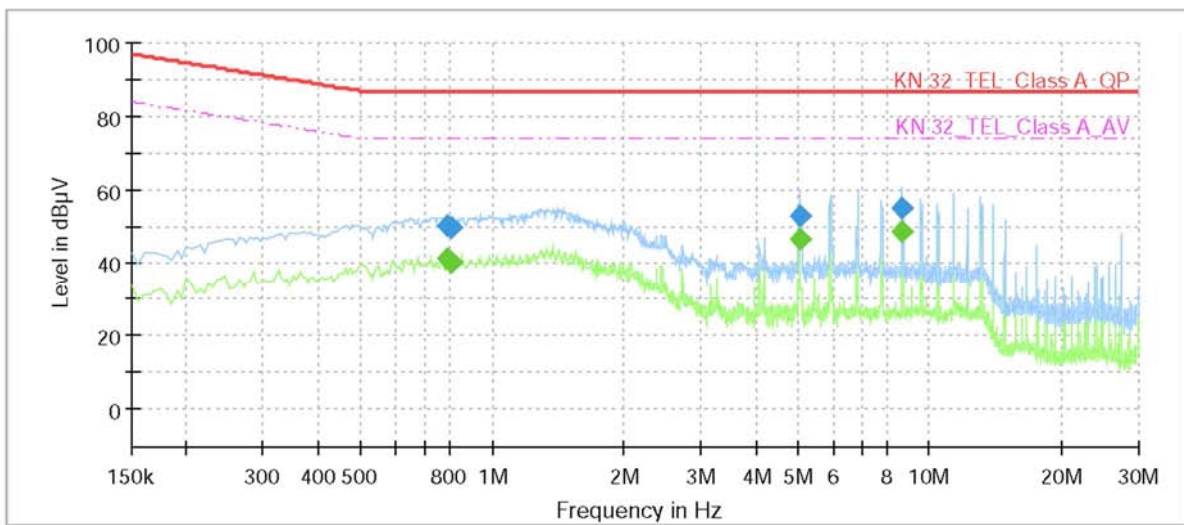

Final Result


Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.790000	---	41.07	74.00	32.93	1000.0	9.000	Single Line	9.9
0.790000	50.08	---	87.00	36.92	1000.0	9.000	Single Line	9.9
0.810000	---	40.34	74.00	33.66	1000.0	9.000	Single Line	9.9
0.810000	49.92	---	87.00	37.08	1000.0	9.000	Single Line	9.9
5.055000	---	46.76	74.00	27.24	1000.0	9.000	Single Line	9.9
5.055000	52.93	---	87.00	34.07	1000.0	9.000	Single Line	9.9
8.640000	---	48.72	74.00	25.28	1000.0	9.000	Single Line	10.0
8.640000	54.85	---	87.00	32.15	1000.0	9.000	Single Line	10.0

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

[100 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	QND-7030RP
Mode	DC-100M-CE
Operator Name:	KES

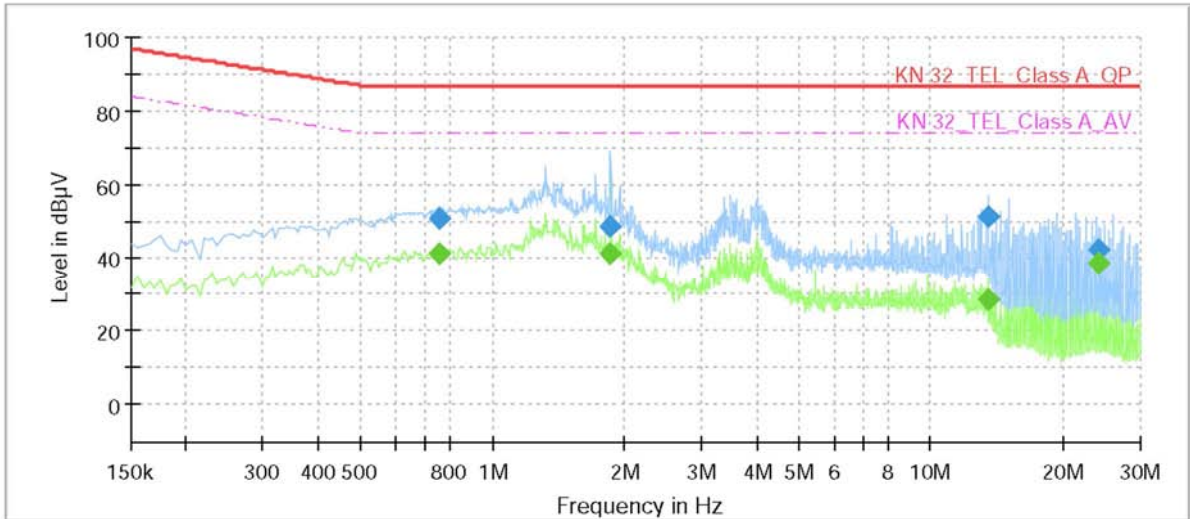

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.755000	---	41.18	74.00	32.82	1000.0	9.000	Single Line	9.4
0.755000	50.80	---	87.00	36.20	1000.0	9.000	Single Line	9.4
1.860000	---	41.08	74.00	32.92	1000.0	9.000	Single Line	9.3
1.860000	48.73	---	87.00	38.27	1000.0	9.000	Single Line	9.3
13.555000	---	28.73	74.00	45.27	1000.0	9.000	Single Line	9.6
13.555000	51.49	---	87.00	35.51	1000.0	9.000	Single Line	9.6
24.000000	---	38.40	74.00	35.60	1000.0	9.000	Single Line	9.5
24.000000	42.37	---	87.00	44.63	1000.0	9.000	Single Line	9.5


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- PoE Mode

[10 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	QND-7030RP
Mode	POE-10M-CE
Operator Name:	KES

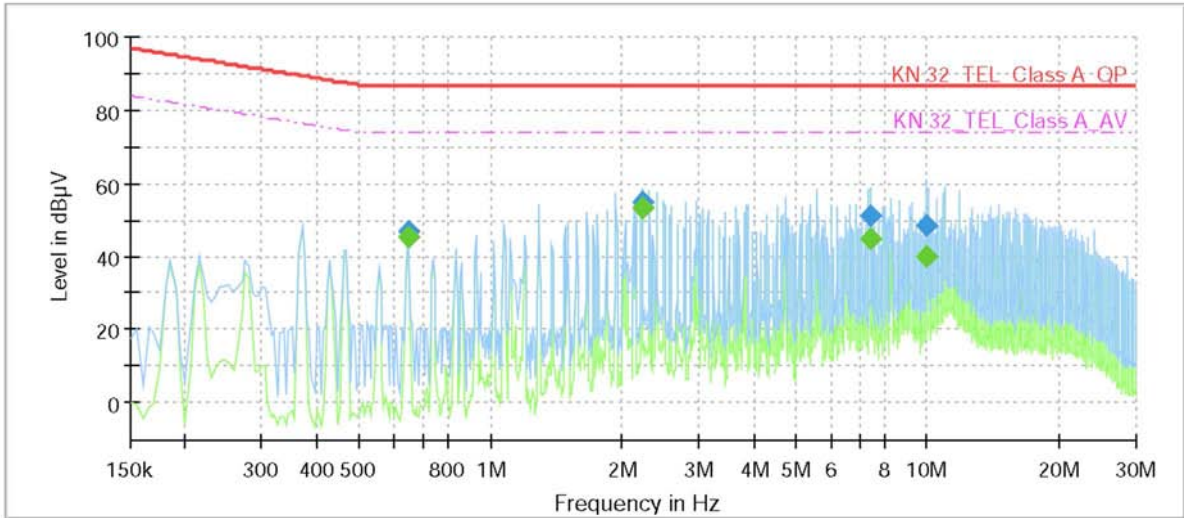

Final Result


Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.645000	---	45.78	74.00	28.22	1000.0	9.000	Single Line	9.9
0.645000	47.23	---	87.00	39.77	1000.0	9.000	Single Line	9.9
2.220000	---	53.37	74.00	20.63	1000.0	9.000	Single Line	9.8
2.220000	54.93	---	87.00	32.07	1000.0	9.000	Single Line	9.8
7.390000	---	45.25	74.00	28.75	1000.0	9.000	Single Line	10.0
7.390000	51.38	---	87.00	35.62	1000.0	9.000	Single Line	10.0
9.995000	---	40.33	74.00	33.67	1000.0	9.000	Single Line	10.1
9.995000	48.89	---	87.00	38.11	1000.0	9.000	Single Line	10.1

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

[100 Mbps]

Common Information

Test Description:	Telecommunication Emission
Model No.:	QND-7030RP
Mode	POE-100M-CE
Operator Name:	KES

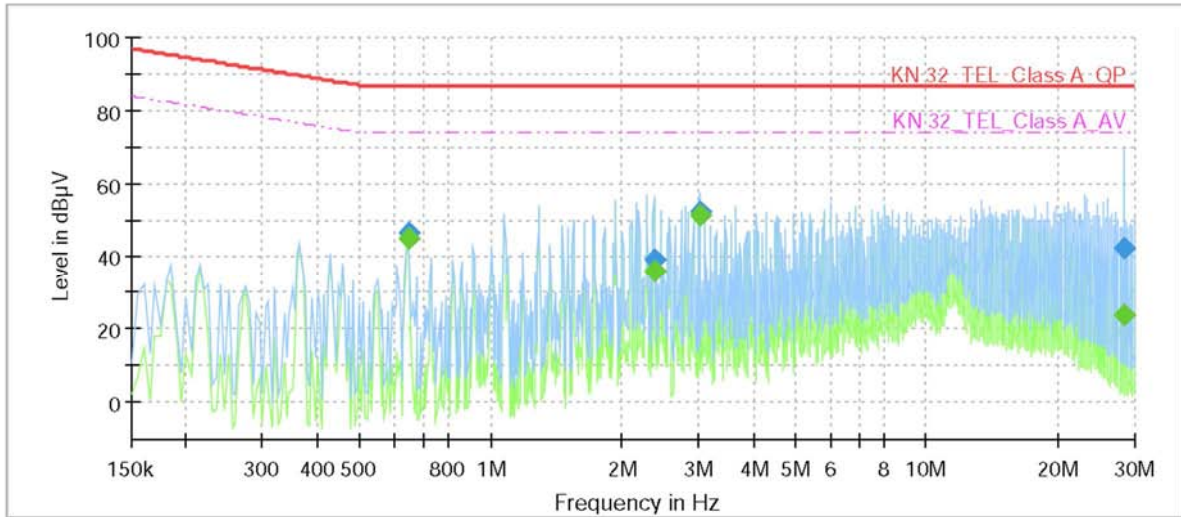

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.645000	---	45.21	74.00	28.79	1000.0	9.000	Single Line	9.4
0.645000	46.69	---	87.00	40.31	1000.0	9.000	Single Line	9.4
2.370000	---	35.75	74.00	38.25	1000.0	9.000	Single Line	9.3
2.370000	39.15	---	87.00	47.85	1000.0	9.000	Single Line	9.3
3.010000	---	51.56	74.00	22.44	1000.0	9.000	Single Line	9.3
3.010000	52.60	---	87.00	34.40	1000.0	9.000	Single Line	9.3
28.410000	---	23.89	74.00	50.11	1000.0	9.000	Single Line	9.4
28.410000	42.49	---	87.00	44.51	1000.0	9.000	Single Line	9.4

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Emissions(Below 1 GHz)

- DC 12 V Mode

Frequency [MHz]	Amplitude [dB μ V]	ANT Polar. (H/V)	ANT. Height [m]	Correction Factor		Corrected Amplitude [dB μ V/m]	Applicable Limit [dB μ V/m]	Margin [dB]
				ANT. [dB/m]	Cable [dB]			
168.73	12.20	V	2.60	8.93	2.93	24.06	40.00	15.94
216.19	8.67	H	1.84	11.66	3.44	23.77	40.00	16.23
263.99	15.34	V	2.54	12.68	3.91	31.93	47.00	15.07
264.71	12.87	H	1.87	12.70	3.92	29.49	47.00	17.51
312.20	11.98	H	2.33	13.66	4.32	29.96	47.00	17.04
360.64	10.28	H	1.25	14.79	4.74	29.81	47.00	17.19
360.68	11.87	V	3.01	14.79	4.74	31.40	47.00	15.60
408.39	9.87	V	1.99	15.82	5.10	30.79	47.00	16.21

* H : Horizontal, V : Vertical


- PoE Mode

Frequency [MHz]	Amplitude [dB μ V]	ANT Polar. (H/V)	ANT. Height [m]	Correction Factor		Corrected Amplitude [dB μ V/m]	Applicable Limit [dB μ V/m]	Margin [dB]
				ANT. [dB/m]	Cable [dB]			
138.67	12.92	V	2.30	7.96	2.70	23.58	40.00	16.42
168.72	10.39	H	1.87	8.93	2.93	22.25	40.00	17.75
263.99	15.38	V	2.95	12.68	3.91	31.97	47.00	15.03
270.47	11.38	H	1.88	12.81	3.97	28.16	47.00	18.84
312.16	9.36	H	2.96	13.66	4.32	27.34	47.00	19.66
312.20	10.21	V	2.36	13.66	4.32	28.19	47.00	18.81
360.71	11.87	V	1.90	14.79	4.74	31.40	47.00	15.60
408.38	9.37	H	1.07	15.82	5.10	30.29	47.00	16.71

* H : Horizontal, V : Vertical

Radiated Electric Field Emissions(Above 1 GHz)


- DC 12 V Mode

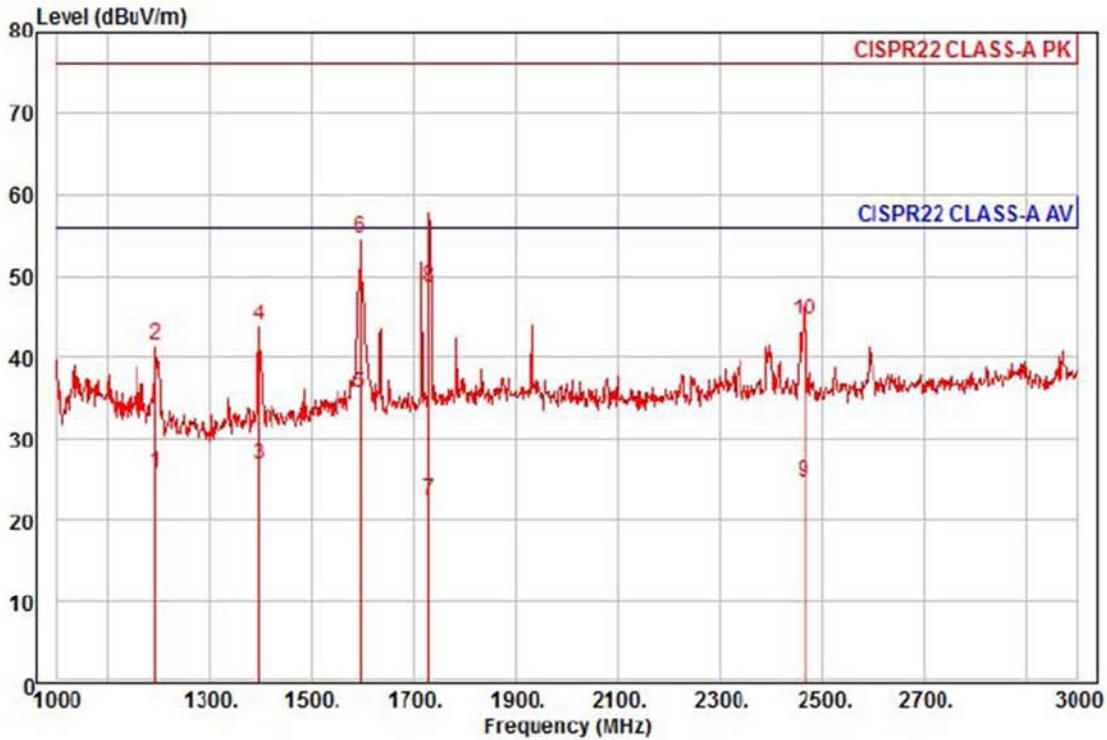

Site : chamber
 Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
 : RBW:1000.000kHz VBN:1000.000kHz SWT:Auto
 Project :
 Model : QND-7030RP
 Mode : DC 12V_CE
 Memo : 1 ~ 3 GHz

	Read Freq	Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1194.00	33.92	24.68	7.07	40.02	89	56.00	-30.35	horizontal	Average
2	1194.00	49.60	24.68	7.07	40.02	89	76.00	-34.67	horizontal	Peak
3	1396.00	33.56	25.48	7.66	39.93	111	56.00	-29.23	horizontal	Average
4	1396.00	50.62	25.48	7.66	39.93	111	76.00	-32.17	horizontal	Peak
5 pp	1596.00	40.82	26.28	8.24	39.83	86	56.00	-20.49	horizontal	Average
6 pk	1596.00	60.09	26.28	8.24	39.83	86	76.00	-21.22	horizontal	Peak
7	1730.00	26.70	26.81	8.61	39.76	63	56.00	-33.64	horizontal	Average
8	1730.00	52.86	26.81	8.61	39.76	63	76.00	-27.48	horizontal	Peak
9	2466.00	25.48	29.02	10.06	39.90	315	56.00	-31.34	horizontal	Average
10	2466.00	45.38	29.02	10.06	39.90	315	76.00	-31.44	horizontal	Peak


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

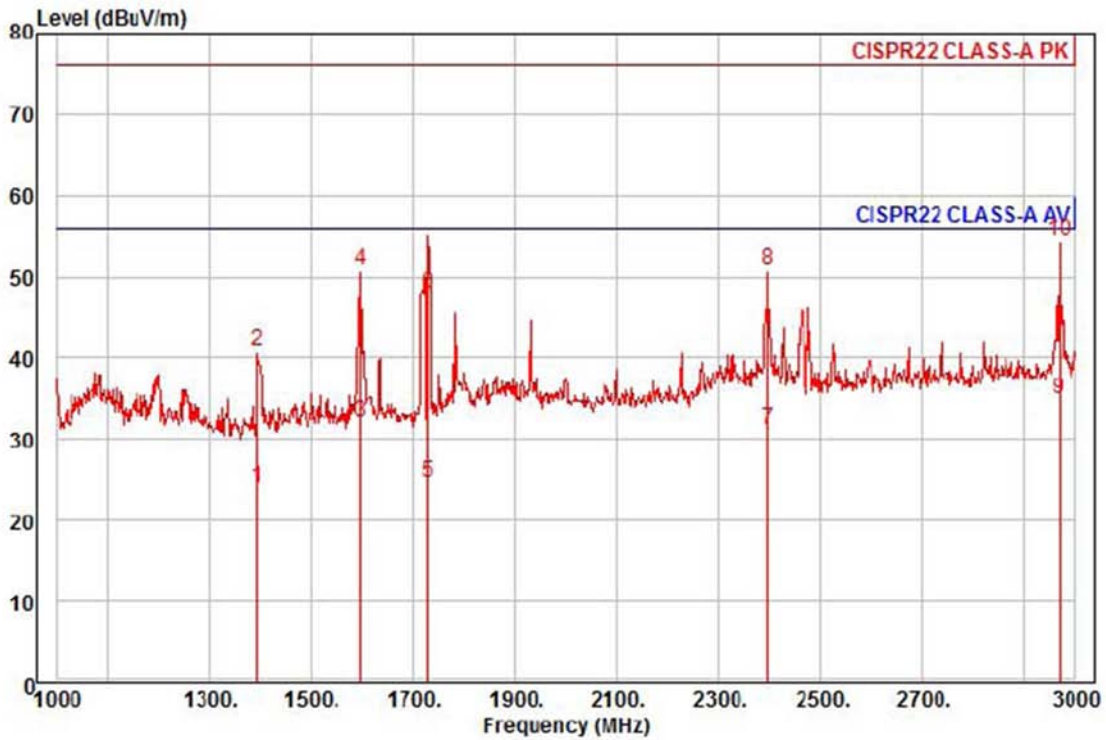

Site : chamber
 Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
 : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
 Project :
 Model : QND-7030RP
 Mode : DC 12V_CE
 Memo : 1 ~ 3 GHz

	Read Freq	Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1392.00	30.76	25.47	7.65	39.93	214	56.00	-32.05	vertical	Average
2	1392.00	47.54	25.47	7.65	39.93	214	76.00	-35.27	vertical	Peak
3	1598.00	37.44	26.28	8.24	39.83	55	56.00	-23.87	vertical	Average
4	1598.00	56.02	26.28	8.24	39.83	55	76.00	-25.29	vertical	Peak
5	1730.00	28.94	26.81	8.61	39.76	343	56.00	-31.40	vertical	Average
6	1730.00	52.25	26.81	8.61	39.76	343	76.00	-28.09	vertical	Peak
7	2398.00	32.26	28.85	9.96	39.86	226	56.00	-24.78	vertical	Average
8	2398.00	51.90	28.85	9.96	39.86	226	76.00	-25.14	vertical	Peak
9 pp	2970.00	33.66	30.26	11.15	40.19	337	56.00	-21.12	vertical	Average
10 pk	2970.00	53.20	30.26	11.15	40.19	337	76.00	-21.58	vertical	Peak

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

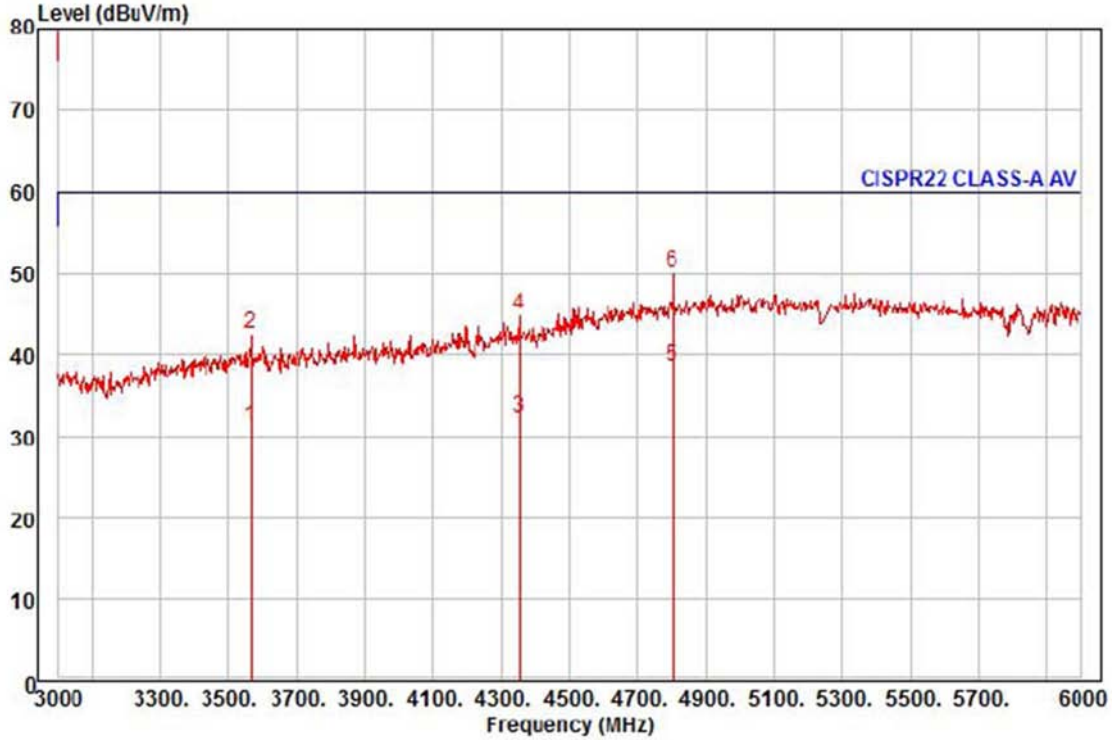

Site : chamber
 Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
 : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
 Project :
 Model : QND-7030RP
 Mode : DC 12V_CE
 Memo : 3 ~ 6 GHz

	Read Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3564.00	27.51	31.28	12.64	40.32	338	60.00	-28.89	horizontal	Average
2	3564.00	38.96	31.28	12.64	40.32	338	80.00	-37.44	horizontal	Peak
3	4353.00	24.41	34.03	14.16	40.41	154	60.00	-27.81	horizontal	Average
4	4353.00	37.13	34.03	14.16	40.41	154	80.00	-35.09	horizontal	Peak
5 pp	4800.00	27.41	36.58	14.97	40.41	330	60.00	-21.45	horizontal	Average
6 pk	4800.00	38.91	36.58	14.97	40.41	330	80.00	-29.95	horizontal	Peak


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



KES Co., Ltd.

C-3701, Simin-daero 365-40,
 Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450
 www.kes.co.kr

Test report No.:
 KES-E1-16T0207
 Page (48) of (76)

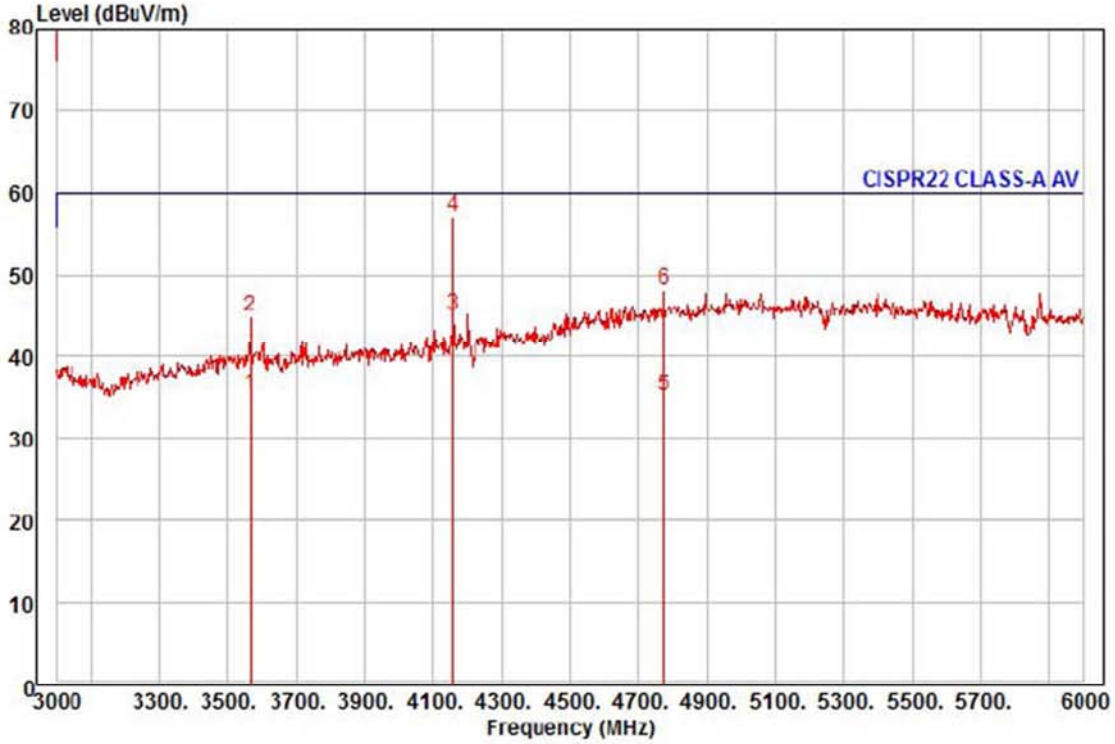


Site : chamber
 Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
 : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
 Project :
 Model : QND-7030RP
 Mode : DC 12V_CE
 Memo : 3 ~ 6 GHz

	Read Freq	Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3564.00	31.69	31.28	12.64	40.32	331	60.00	-24.71	vertical	Average
2	3564.00	41.33	31.28	12.64	40.32	331	80.00	-35.07	vertical	Peak
3 pp	4158.00	38.91	32.91	13.80	40.41	275	60.00	-14.79	vertical	Average
4 pk	4158.00	50.73	32.91	13.80	40.41	275	80.00	-22.97	vertical	Peak
5	4773.00	24.21	36.42	14.92	40.41	266	60.00	-24.86	vertical	Average
6	4773.00	37.34	36.42	14.92	40.41	266	80.00	-31.73	vertical	Peak

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


- PoE Mode

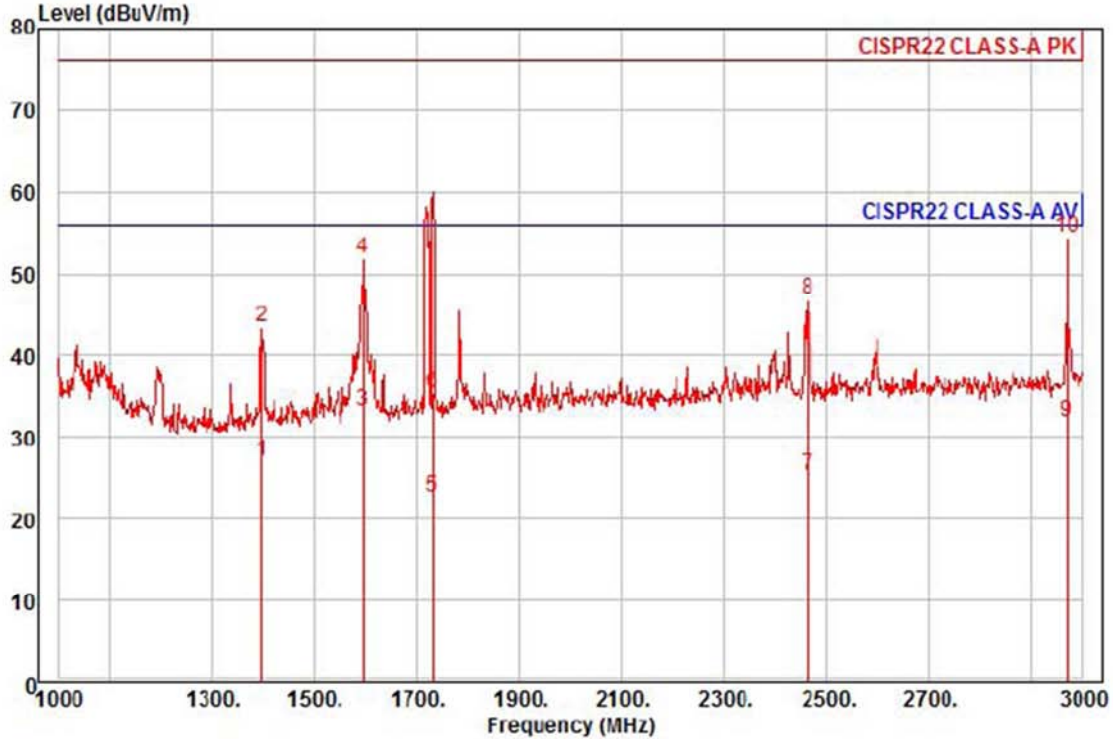

Site : chamber
 Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
 : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
 Project :
 Model : QND-7030RP
 Mode : POE_CE
 Memo : 1 ~ 3 GHz

	Read	Ant	Cable	Preamp	TPos	Limit	Over		
Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	1396.00	33.89	25.48	7.66	39.93	211	56.00	-28.90	horizontal Average
2	1396.00	50.13	25.48	7.66	39.93	211	76.00	-32.66	horizontal Peak
3 av	1596.00	38.37	26.28	8.24	39.83	164	56.00	-22.94	horizontal Average
4	1596.00	57.23	26.28	8.24	39.83	164	76.00	-24.08	horizontal Peak
5	1732.00	27.04	26.82	8.61	39.76	60	56.00	-33.29	horizontal Average
6	1732.00	39.74	26.82	8.61	39.76	60	76.00	-40.59	horizontal Peak
7	2464.00	26.08	29.02	10.06	39.90	225	56.00	-30.74	horizontal Average
8	2464.00	47.78	29.02	10.06	39.90	225	76.00	-29.04	horizontal Peak
9	2970.00	30.61	30.26	11.15	40.19	341	56.00	-24.17	horizontal Average
10 pp	2970.00	53.24	30.26	11.15	40.19	341	76.00	-21.54	horizontal Peak


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

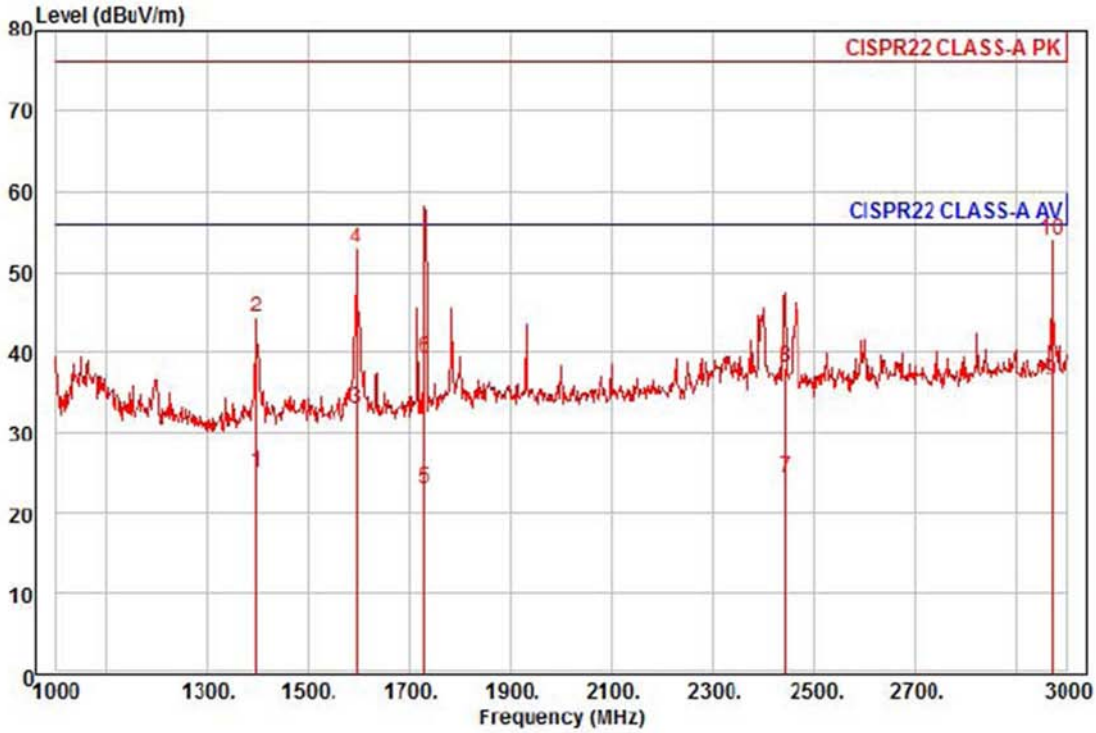

Site : chamber
 Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
 : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
 Project :
 Model : QND-7030RP
 Mode : POE_CE
 Memo : 1 ~ 3 GHz

	Read	Ant	Cable	Preamp	TPos	Limit	Over			
Freq	Level	Factor	Loss	Factor		Line	Limit	Pol/Phase	Remark	
MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB			
1	1396.00	31.93	25.48	7.66	39.93	220	56.00	-30.86	vertical	Average
2	1396.00	50.97	25.48	7.66	39.93	220	76.00	-31.82	vertical	Peak
3	1596.00	38.28	26.28	8.24	39.83	44	56.00	-23.03	vertical	Average
4	1596.00	58.34	26.28	8.24	39.83	44	76.00	-22.97	vertical	Peak
5	1730.00	27.48	26.81	8.61	39.76	137	56.00	-32.86	vertical	Average
6	1730.00	43.67	26.81	8.61	39.76	137	76.00	-36.67	vertical	Peak
7	2442.00	25.34	28.96	10.03	39.89	336	56.00	-31.56	vertical	Average
8	2442.00	39.04	28.96	10.03	39.89	336	76.00	-37.86	vertical	Peak
9 pp	2970.00	35.11	30.26	11.15	40.19	264	56.00	-19.67	vertical	Average
10 pk	2970.00	52.80	30.26	11.15	40.19	264	76.00	-21.98	vertical	Peak


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

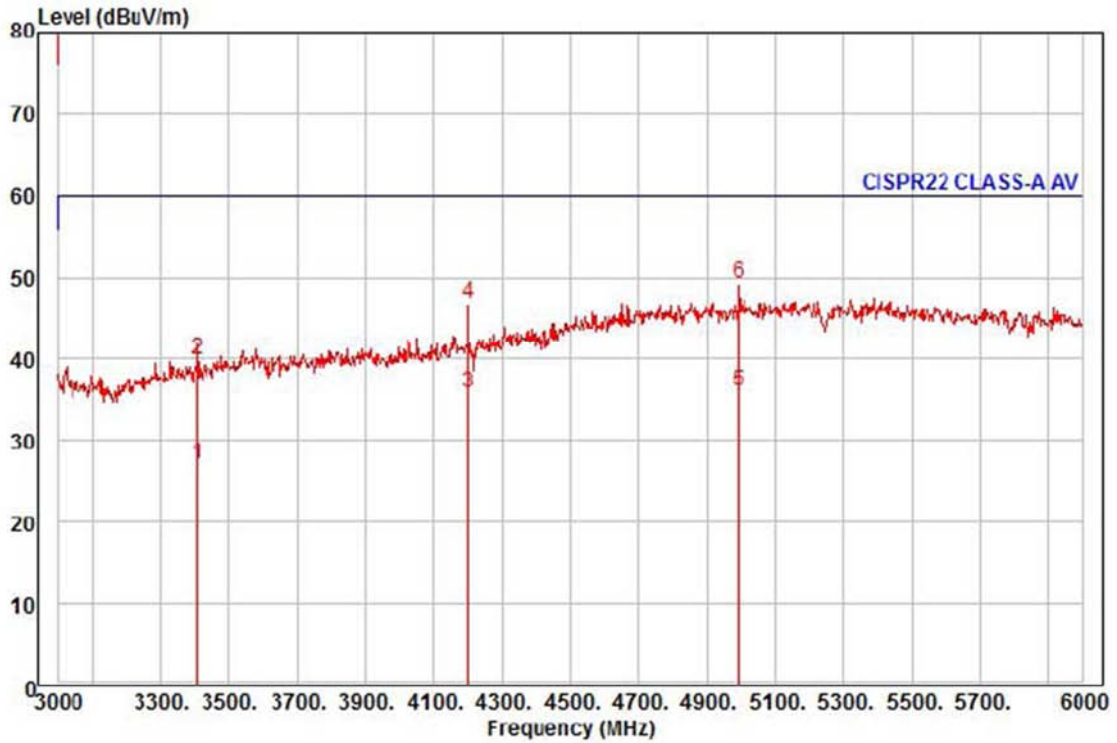

Site : chamber
 Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) horizontal
 : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
 Project :
 Model : QND-7030RP
 Mode : POE_CE
 Memo : 3 ~ 6 GHz

	Read Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/m	dB		
1	3405.00	24.13	31.01	12.26	40.29	202	60.00	-32.89	horizontal	Average
2	3405.00	36.92	31.01	12.26	40.29	202	80.00	-40.10	horizontal	Peak
3	4200.00	29.11	33.15	13.88	40.41	345	60.00	-24.27	horizontal	Average
4	4200.00	40.21	33.15	13.88	40.41	345	80.00	-33.17	horizontal	Peak
5 pp	4992.00	23.44	37.67	15.32	40.41	34	60.00	-23.98	horizontal	Average
6 pk	4992.00	36.68	37.67	15.32	40.41	34	80.00	-30.74	horizontal	Peak

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

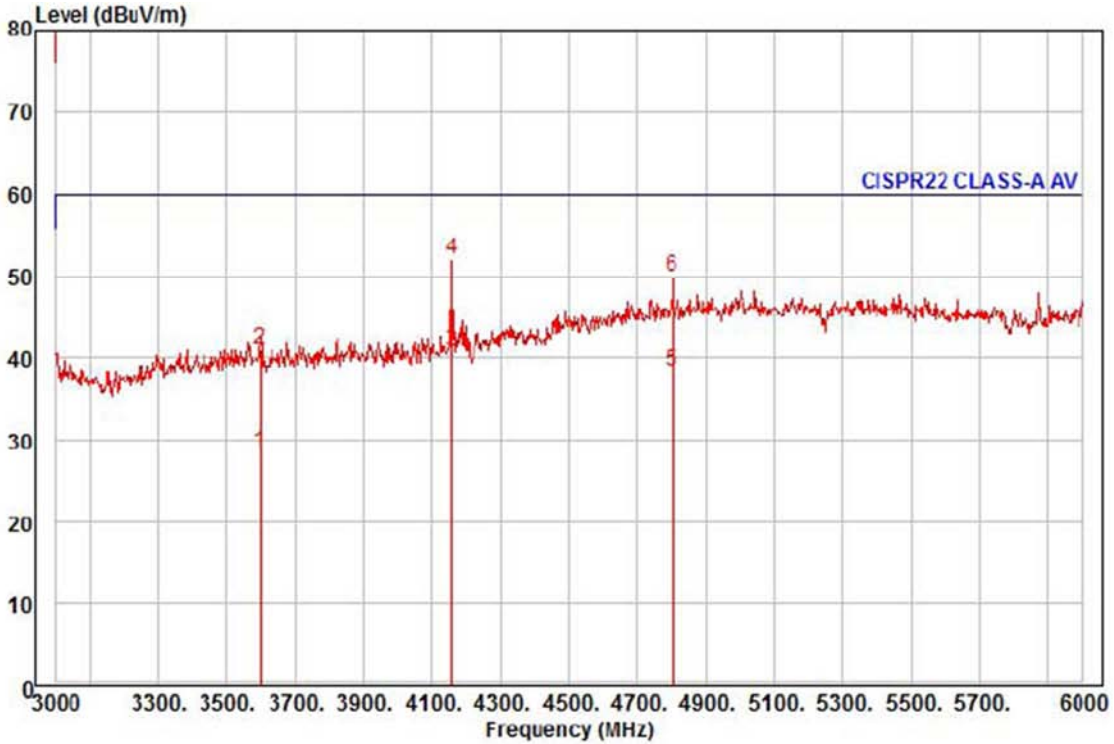

Site : chamber
 Condition: CISPR22 CLASS-A PK 3m HORN781(2015.05.07) vertical
 : RBW:1000.000kHz VBW:1000.000kHz SWT:Auto
 Project :
 Model : QND-7030RP
 Mode : POE_CE
 Memo : 3 ~ 6 GHz

	Read Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	TPos	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	deg	dBuV/n	dB		
1	3597.00	24.87	31.33	12.70	40.33	338	60.00	-31.43	vertical	Average
2	3597.00	37.39	31.33	12.70	40.33	338	80.00	-38.91	vertical	Peak
3 pp	4158.00	34.53	32.91	13.80	40.41	224	60.00	-19.17	vertical	Average
4 pk	4158.00	45.74	32.91	13.80	40.41	224	80.00	-27.96	vertical	Peak
5	4800.00	27.33	36.58	14.97	40.41	341	60.00	-21.53	vertical	Average
6	4800.00	38.68	36.58	14.97	40.41	341	80.00	-30.18	vertical	Peak

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



Harmonic Current Emissions and Voltage Fluctuations and Flicker

Average harmonic current results

Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	N/A			
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				
21				
22				
23				
24				
25				
26				
27				
28				
29				
30				
31				
32				
33				
34				
35				
36				
37				
38				
39				
40				

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



Test Data - Harmonics (continued)

Maximum harmonic current results				
Hn	I _{eff} [A]	% of Limit	Limit [A]	Result
1	N/A			
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				
21				
22				
23				
24				
25				
26				
27				
28				
29				
30				
31				
32				
33				
34				
35				
36				
37				
38				
39				
40				

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



Test Data - Voltage Fluctuations

Maximum Flicker results

	EUT values	Limit	Result
Pst	N/A		
Plt			
dc [%]			
dmax [%]			
Tmax [s]			

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0207
Page (56) of (76)

Test Setup Photos and Configuration

Conducted Voltage Emissions

N/A

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


Conducted Telecommunication Emissions

- DC 12 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- PoE Mode

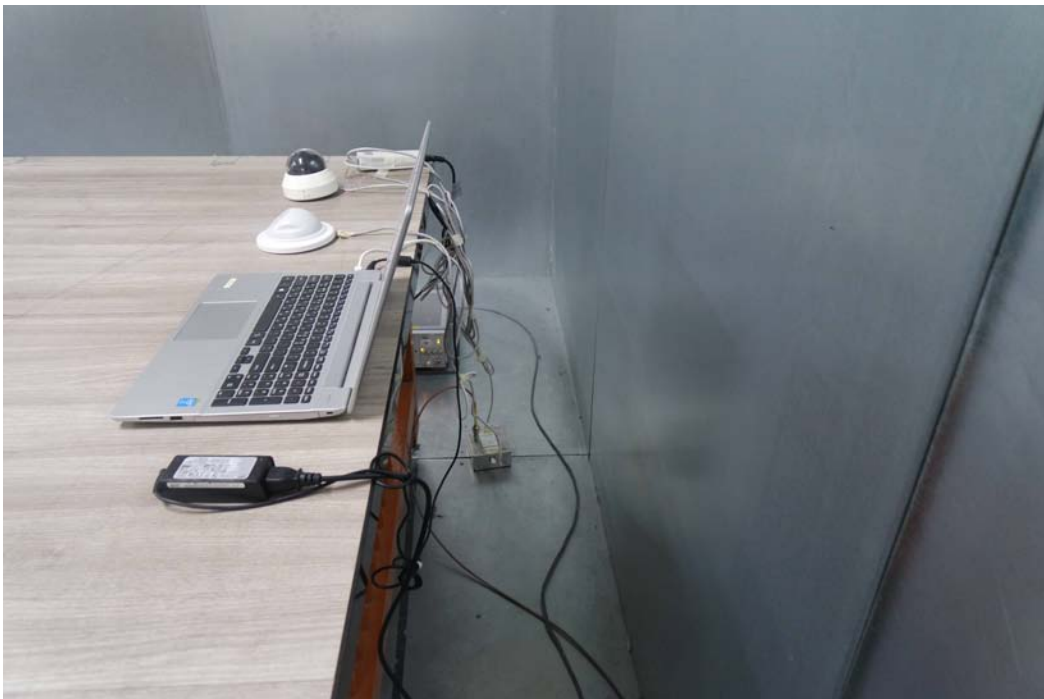

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Emissions(Below 1 GHz)

- DC 12 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- PoE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


Radiated Electric Field Emissions(Above 1 GHz)

- DC 12 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- PoE Mode

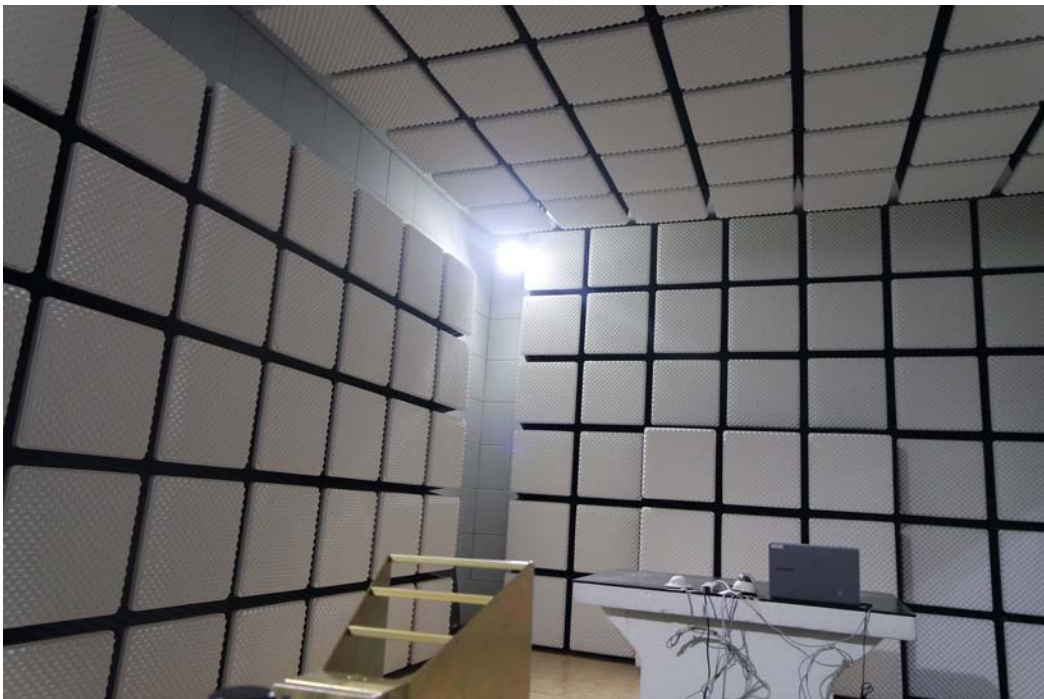

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0207
Page (63) of (76)

Harmonic Current Emissions and Voltage Fluctuations and Flicker

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Electrostatic Discharge

- DC 12 V Mode



- PoE Mode




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Radiated Electric Field Immunity

- DC 12 V Mode



- PoE Mode

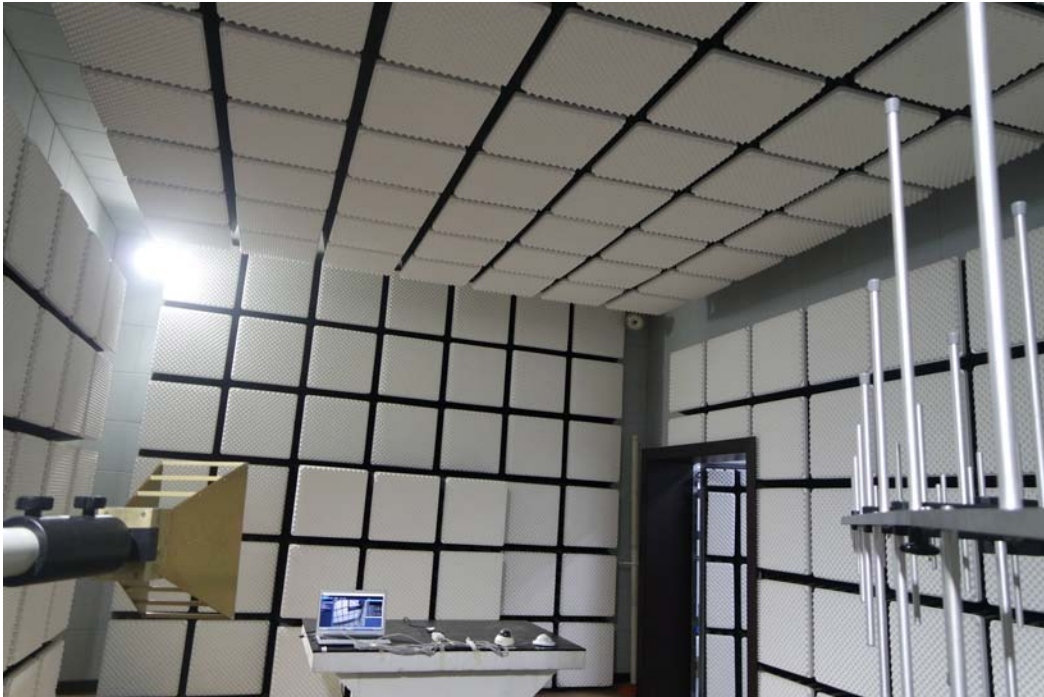

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Electrical Fast Transients/Bursts

- DC 12 V Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- PoE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Surge Transients

- DC 12 V Mode




- PoE Mode



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


Conducted Disturbance

- DC 12 V Mode

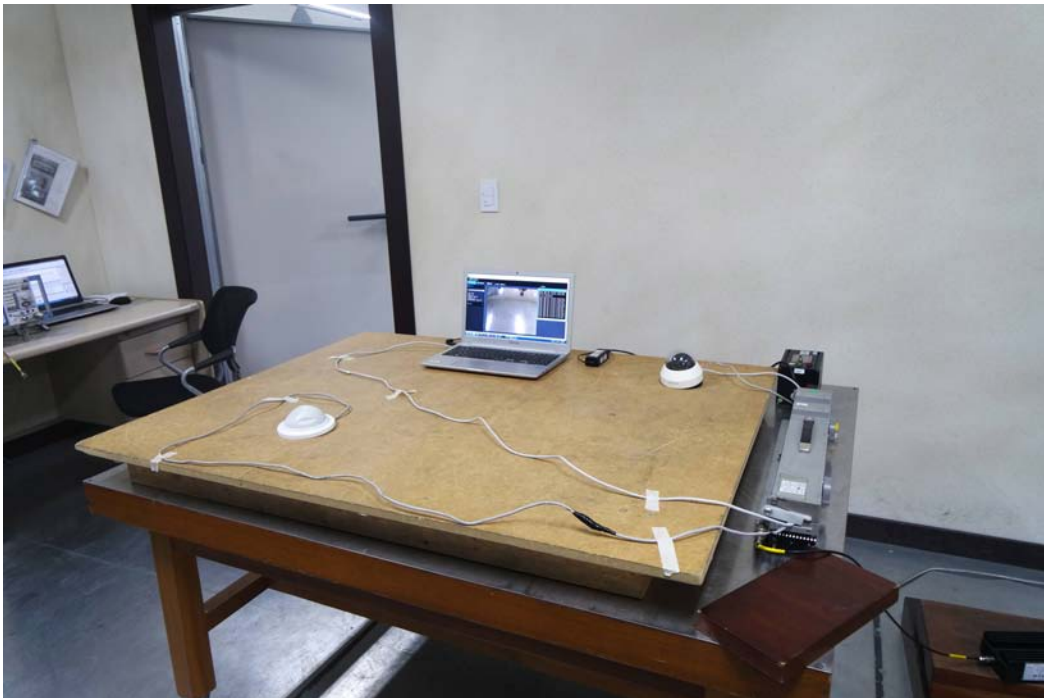

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

- PoE Mode

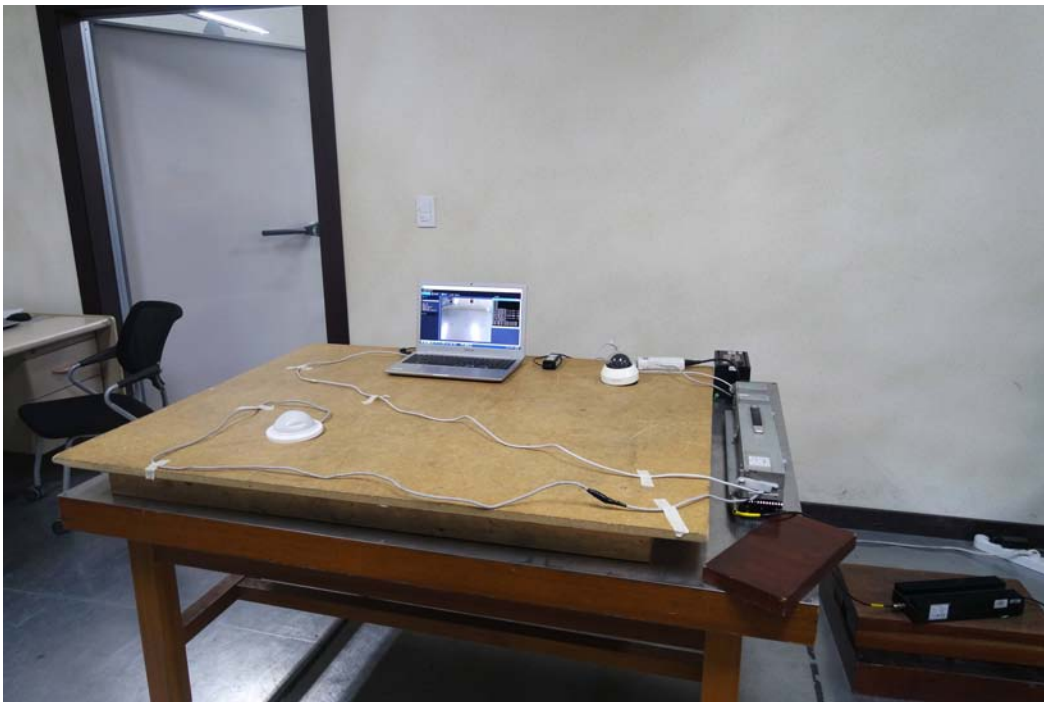

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



KES Co., Ltd.

C-3701, Simin-daero 365-40,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-E1-16T0207
Page (71) of (76)

Voltage Dips and Short Interruptions

N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT External Photographs

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

EUT Internal Photographs

(Internal View)




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Main Board EUT Internal View – Main Board

(Top)



(Bottom)

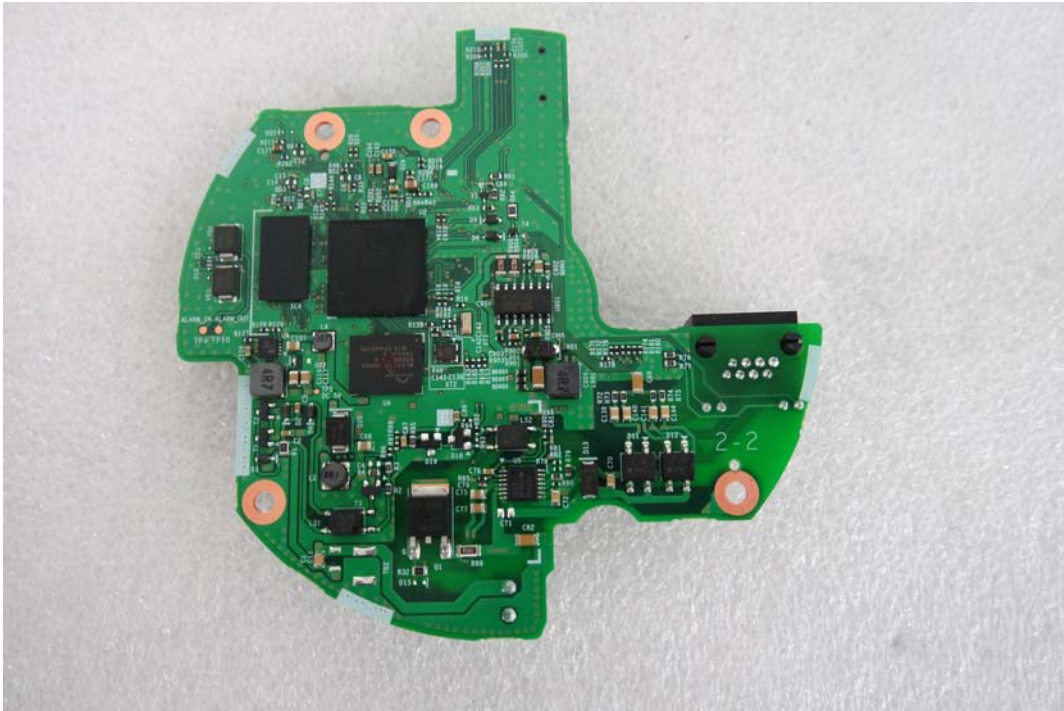

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Main Board EUT Internal View – Camera lens

(Top)



(Bottom)



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Label and Location



NETWORK CAMERA

Model No : QND-7030RP

Manufacturer : Tianjin Samsung Techwin Opto-Electronic Co.,Ltd.

Made in of China